



P-DUKE POWER

XTBF500 Series

AC-DC Power Supplies
Up to 500 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



3000 VAC
Reinforced Insulation

NO
Min. Load Required

POWER GOOD

REMOTE ON OFF

Active Droop
Current Share

LOW
Standby Power

OCP

OTP

OVP

SCP

OVCIII

PART NUMBER STRUCTURE

XTBF	500	U	S	12	-		S
Series Name	Output Power (W)	Input Voltage (VAC)	Output Quantity	Output Voltage (VDC)		Package Options	Load Share Options
		U: Universal 85 ~ 264	S: Single	12:12 15:15 24:24 28:28 48:48 54:54		□: Open type E1: Enclosed type	□: None S: Load Share

TECHNICAL SPECIFICATION All specifications are typical at 230VAC input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ 230VAC Conduction Cooling	Input Power @ No Load	Efficiency	Maximum Capacitor Load
	VAC	VDC	A	W	%	μF
XTBF500US12	85 ~ 264	12	42	0.8	91	16000
XTBF500US15	85 ~ 264	15	33.5	0.8	91	10000
XTBF500US24	85 ~ 264	24	21	0.8	93	2000
XTBF500US28	85 ~ 264	28	18	0.8	93	1000
XTBF500US48	85 ~ 264	48	10.5	0.8	93	470
XTBF500US54	85 ~ 264	54	9.4	0.8	93	470

INPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating input voltage range	AC input	85		264	VAC	
	DC input	88		370	VDC	
Input frequency	AC input	47		63	Hz	
Input current	100VAC and full load			6.3	A	
	240VAC and full load			2.7		
No load input power	230VAC		0.8		Watts	
Power factor	230VAC and full load	0.9				
Start up time				2000	ms	
Rise time			20		ms	
Hold up time	115VAC and full load		16		ms	
Input inrush current	230VAC and full load		30		A	
Input protection				T10A/250VAC		

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output power	Conduction cooling @ 230VAC *Please refer to the derating curve for detailed rating.			500	Watts
Voltage accuracy	230VAC and full load	-1.0		+1.0	%
Line regulation	Low line to high line at full load	-0.2		+0.2	%
Load regulation	No load to full load 10% load to 90% load	-0.5 -0.4		+0.5 +0.4	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense Only for load share models (-S suffix)	-10 -5		+10 +5	%
Remote sense	% of Vout(nom) If remote sense is not being used, sense pins should be connected to corresponding polarity OUTPUT pins.			10	%
Minimum load			0		%
Ripple and noise	Measured by 20MHz bandwidth With a 1 μ F/50V 1206 X7R MLCC 12Vout 15Vout 24Vout 28Vout With a 1 μ F/100V 1206 X7R MLCC 48Vout 54Vout		200 200 240 280 480 540		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response	Load step from 50 ~ 75% change at 2.5A/ μ s Recovery within 1% Vout Peak deviation Recovery time		3 600		% Vout μ s
Over voltage protection	% of Vout(nom); Latch mode	115		135	%
Over load protection	% of maximum Iout rated; Hiccup mode		140		%
Short circuit protection		Continuous, automatic recovery			
Remote ON/OFF	External power supply is required Between +Ctrl and -Ctrl Output ON Output OFF Input current		0 ~ 0.8 VDC or Open 4.5 ~ 12.5 VDC 20		mA
Main output power good signal	Referenced to "-Vout" Power good Power off				Low Open collector
Load share (-S suffix)	The converter can parallel to increase output current. It has internal load share function in this converter.	Active droop current share models			
Droop rate (-S suffix)	No load to full load		4		%
Load share accuracy (-S suffix)	Full load		20		%

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation) Input to Output Input (Output) to F.G.	3000 2000			VAC
Isolation resistance	500VDC	0.1			G Ω
Switching frequency	230VAC, full load		180		kHz
Safety meets		IEC/ EN/ UL 62368-1			
Standard approvals		EN50155 EN45545-2			
Weight	Open type Enclosed type			580g (20.45oz) 710g (25.04oz)	
MTBF	MIL-HDBK-217F, full load			2.500 x 10 ⁵	hrs


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+100	°C
Storage temperature range		-55		+105	°C
Over temperature protection	Internal thermistor ; automatics recovery		115		°C
Operating altitude				5000	m
Shock			EN61373, IEC60068-2-27		
Vibration			EN61373, IEC60068-2-6		
Relative humidity				5% to 95% RH	


EMC SPECIFICATIONS

Parameter	Conditions	Level	
EMI	EN55032 and FCC Part 15	Conducted	Class B
	EN50121-3-2	Radiated	Class A
	EN50121-4		
Harmonic currents	EN61000-3-2	Full Load	
Voltage flicker	EN61000-3-3		
EMS	EN55035		
	EN50121-3-2		
	EN50121-4		
ESD	EN61000-4-2		
Radiated immunity	EN61000-4-3	20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV	Perf. Criteria A
Surge	EN61000-4-5	DM ± 1kV and CM ± 2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	EN55035:30 A/m	Perf. Criteria A
		EN50121-4:100 A/m	
Dip and interruptions	EN61000-4-11		


CHARACTERISTIC CURVE

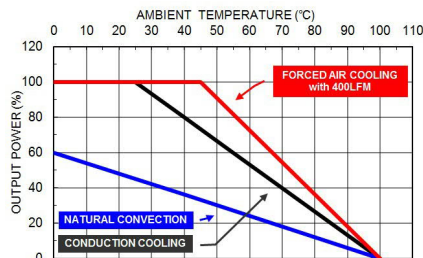


Derating Curve vs. Ambient Temperature
Vin=115VAC Open type / Enclosed type
conduction cooling tested by 482.6x222.2x2mm plate

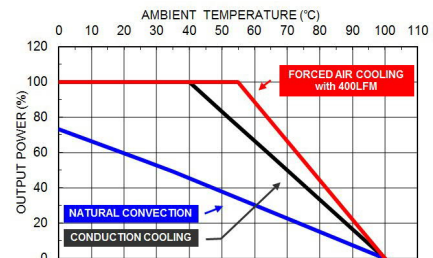


Derating Curve vs. Ambient Temperature
Vin=230VAC Open type / Enclosed type
conduction cooling tested by 482.6x222.2x2mm plate

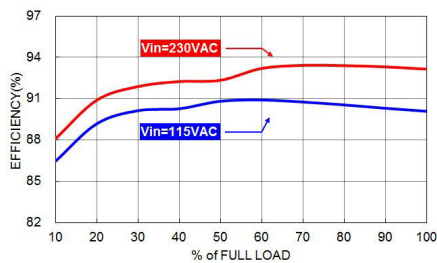

XTBF500US24 Efficiency vs. Output Load

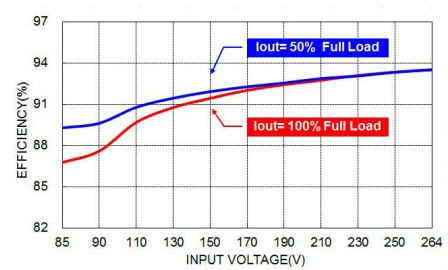


XTBF500US24 Efficiency vs. Input Voltage

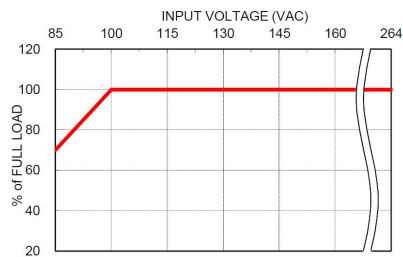


Derating Curve vs. Input Voltage

MECHANICAL DRAWING

Open type

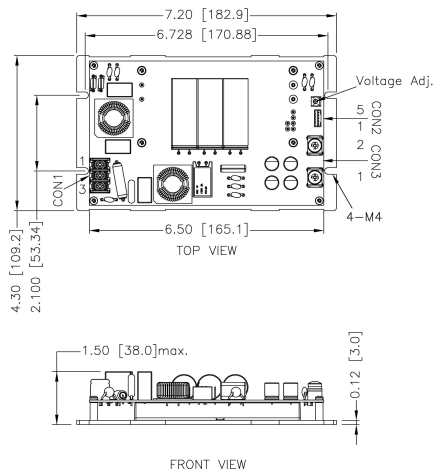

Enclosed type

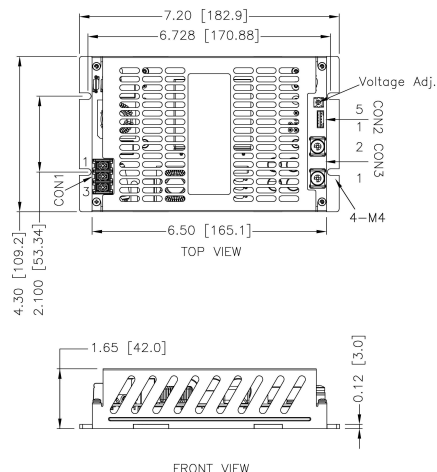

1.All dimensions in inch [mm]

Tolerance: $x.xx \pm 0.02$ [$x.x \pm 0.5$]

$x.xxx \pm 0.01$ [$x.xx \pm 0.25$]

2.The screw locked torque: MAX 10.4Kgf.cm/1.02N.m

1.All dimensions in inch [mm]

Tolerance: $x.xx \pm 0.02$ [$x.x \pm 0.5$]

$x.xxx \pm 0.01$ [$x.xx \pm 0.25$]

2.The screw locked torque: MAX 10.4Kgf.cm/1.02N.m

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin 1	Line
Pin 2	Neutral
Pin 3	FG

Mates with

KST ring terminal: **RV1-3.2**

Screw locked torque: MAX 8.1Kgf.cm/0.8N.m

CON2 – Aux Connector

Pin 1	+PG
Pin 2	+V Sense
Pin 3	-V Sense
Pin 4	+Control
Pin 5	-Control

Mates with

Landwin housing: **2001S**

Landwin crimp terminals: **2005T**

CON3 – Output Connector

Pin 1	+Vout
Pin 2	-Vout

Mates with

KST ring terminal: **RV5-5**

Screw locked torque: MAX 16.8Kgf.cm/1.65N.m