


## ARCOPTIX OEM010



The ARCOptix OEM010 is our most compact FT-IR complete system. It features a built-in SiC globar heated to 1550 °K and regulated in temperature to ensure stable illumination. The light that is being output by the instrument is first modulated by our permanently aligned interferometer, making it robust against stray light that might eventually reach the detector. The OEM010 rugged casing also holds a highly sensitive TE-MCT detector which maximizes the response of the system.

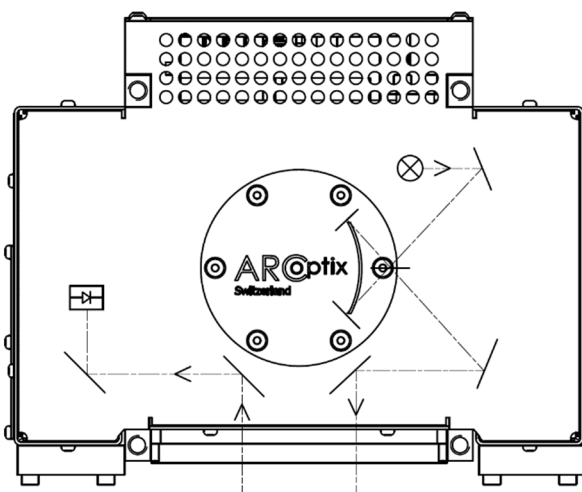

*Optical routing in the ARCOPTIX OEM010*

### Features

- Internal light source
- Compact, rugged unit
- Custom I/O coupling modules on request
- Robust to ambient light perturbation
- Dynamically adjustable resolution:
  - $8\text{cm}^{-1}$
  - $4\text{cm}^{-1}$
  - $2\text{cm}^{-1}$
  - $0.5\text{cm}^{-1}$  (on request)
- Wear free moving parts for extended lifetime
- No purging of the interferometer required
- Temperature controlled reference laser

## Specifications

| Product code                                             | FTIR-OEM010-060-4TE                                                                                                    | FTIR-OEM010-085-4TE    | FTIR-OEM010-120-4TE |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------|---------------------|
| Beam-splitter material                                   | CaF <sub>2</sub>                                                                                                       |                        | ZnSe                |
| Spectral Range [cm <sup>-1</sup> ]                       | 1'660-5'000                                                                                                            | 1'200-6'600            | 830-5'000           |
| Spectral Range [μm]                                      | 2-6                                                                                                                    | 1.5-8.5                | 2-12                |
| Detector Type                                            | MCT<br>(2-TE cooled)                                                                                                   | MCT<br>(4-TE cooled)   |                     |
| Detector Peak D* [cm Hz <sup>1/2</sup> W <sup>-1</sup> ] | >1x10 <sup>11</sup>                                                                                                    | >8x10 <sup>9</sup>     | >4x10 <sup>9</sup>  |
| Signal-to-noise ratio (SNR)                              | > 80'000:1 <sup>i</sup>                                                                                                | >40'000:1 <sup>i</sup> |                     |
| Output beam characteristics                              | Ø 12.7mm collimated (max ~30mrad half angle)                                                                           |                        |                     |
| Interferometer type                                      | Permanently aligned, double retro-reflector design                                                                     |                        |                     |
| Resolution (unapodized) [cm <sup>-1</sup> ]              | 0.5 <sup>ii</sup> , 2, 4, 8 (user selectable)                                                                          |                        |                     |
| Wavenumber repeatability                                 | <10 PPM                                                                                                                |                        |                     |
| Scan frequency                                           | >4 hz @ 4cm <sup>-1</sup>                                                                                              |                        |                     |
| Internal reference laser                                 | Temperature-stabilized solid-state laser @850nm                                                                        |                        |                     |
| A/D Converter                                            | 24 bit                                                                                                                 |                        |                     |
| Amplifier                                                | 4 gain levels low noise trans-impedance amplifier                                                                      |                        |                     |
| Operating temperature [°C]                               | 10 to 40                                                                                                               |                        |                     |
| Storage temperature [°C]                                 | -20 to 60                                                                                                              |                        |                     |
| Power requirement                                        | 12V / 40W                                                                                                              |                        |                     |
| Communication Interface                                  | USB 2.0                                                                                                                |                        |                     |
| Software Interface                                       | Windows 7/10/11, Linux<br>API for controlling the instrument via our DLL<br>Single board computer available on request |                        |                     |
| Dimensions [mm]                                          | 165x145x82                                                                                                             |                        |                     |
| Weight [g]                                               | 2100                                                                                                                   |                        |                     |

<sup>i</sup> Input to output direct light routing, 60s measurement, around peak sensitivity wavelength, 4cm<sup>-1</sup>, Norton-Beer weak apodization.

<sup>ii</sup> Available on request only, please contact us at [info-de@acalbfi.de](mailto:info-de@acalbfi.de) for details

SPECIFICATIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE.