


Plastic circular connectors
Souriau TRIM TRIO® UTSX series



EAT•N

Powering Business Worldwide

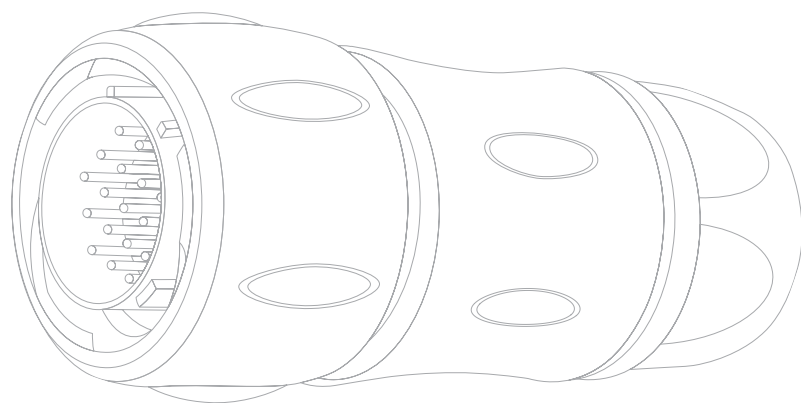

UTSX series

plastic circular connectors

Typical applications



Upgraded for higher performance

The Souriau UTSX series is a full-plastic, waterproof circular connector designed for harsh environments. The UTSX series features reinforced bayonet pins and a broader range of layouts, sizes and mechanical keyings when compared to its predecessor, the UTS series.

Interchangeable with other Souriau TRIM TRIO® connectors

Part of the Souriau TRIM TRIO® connector line, the UTSX series shares a unique design of contacts that are interchangeable across several of our connector series, allowing you to simplify your supply chain and maintain the same cabling process across all ranges. The trio of contacts; machined, stamped and formed, and coaxial is used in different connector shapes with plastic or metal shells, bayonet or push-pull coupling mechanisms. For series that are intermateable, such as the UTS, UTGX and UTO series, you can easily switch from one series to the other across the applications in your operation.

Reliable connections in harsh environments

UTSX series connectors are waterproof, lightweight, withstand 250 mating cycles and are manufactured from materials that have UV and corrosion resistant properties. They are IP68/69K rated even in dynamic conditions and available with multiple contact layouts for design flexibility, including hybrid power/signal and hybrid copper/fiber.

Easy, quick and safe to use in a wide range of applications

The easy to grip connectors have a one-third bayonet coupling to confirm the connection with an audible and tactile click. The UTSX series is compliant with IEC and UL standards and resistant to shock, ensuring safe connections for installers and operators. The UTSX series is perfect for outdoor solar and wind management applications, as well as conditions where humidity or corrosive agents would compromise metal components – applications that range from off-road machinery to instrumentation and water management.



Table of contents

Overview	6
Range overview	6
Technical specifications	8
Layouts size 10	9
Layouts size 12	10
Layouts size 14	11
Connectors	12
Overmolded cable assembly	12
UTSX12E2 / UTSX12D2	14
UTSX103	18
UTSX142G1	23
UTSX12E3 / UTSX12D3	27
UTSX124 / UTSX12E4 / UTSX12D4	31
UTSX102W2	35
UTSX104	41
UTSX14E5 / 14D5	46
UTSX103W3	50
UTSX106 / UTSX10E6 / UTSX10D6	56
UTSX10E98 / UTSX10D98	61
UTSX147 / UTSX14E7 / UTSX14D7	65
UTSX10E7 / UTSX10D7	70
UTSX128	74
UTSX12E8 / UTSX12D8	79
UTSX148	83
UTSX1210 / UTSX12E10 / UTSX12D10	89
UTSX1412	94
UTSX14E12 / UTSX14D12	99
UTSX1492	103
UTSX12E14 / UTSX12D14	108
UTSX14E15 / UTSX14D15	112
UTSX14E18 / UTSX14D18	116
UTSX1419 / UTSX14E19 / UTSX14D19	120
Contacts	125
Description	125
Contact plating selector guide	125
Contact selector guide	126
Packaging	127
Crimp contacts	128
Coaxial contacts	130
PCB contacts	133
Fiber optic contacts	135

Technical information 137

 Crimping tools for standard contacts..... 137

 Crimping tools for specific contacts 137

 M20S-1J crimp tool 138

 Automatic crimping tools..... 139

 Extraction tool for crimp contacts..... 139

 Crimping instructions..... 140

 Crimping control 141

 Handle and interchangeable heads for crimp contacts 142

 Mated connector length 143

 Assembly instructions 144

 Mating procedure 147

 Rated current and working voltage..... 148

 UV resistance 149

 Ethernet basics..... 150

Appendix 152

 Appendix A: Discrimination/Keying methods..... 152

 Appendix B: Part number index 153



Souriau UTSX series

Range overview

UTSX series



Cable sealed



Plug without backshell



Plug with backshell

UTSX backshells

Cable sealing



Double sealing (wires + cable)



Grommet

Contacts supplied separately



Choice of crimp contacts
Machined / Stamped and formed / Coaxial

PCB
Fiber optic

Contacts loaded
Handsolder Screw

UTSX Hi-seal



Plug without backshell



Plug with backshell

Plug



Overmolded cable assembly



For more information on our overmolding solutions, please contact us.

UTSX standard receptacle

Square flange



Jam nut



Free hanging



Jam nut



Contacts supplied separately



Choice of crimp contacts

Machined / Stamped and formed / Coaxial

PCB
Fiber optic

Contacts supplied separately



Choice of crimp contacts

Machined / Stamped and formed / Coaxial

PCB
Fiber optic

Contacts loaded

Handsolder Screw

UTSX backshells

Cable sealing only for square flange



UTSX backshells

Cable sealing



Double sealing (wires + cable)



UTSX Hi-seal receptacle

Jam nut



Square flange



Contacts loaded

PCB
Handsolder

UTSX PCB contacts

Stand-offs to allow cleaning after soldering



Low profile housing to limit space between panel and PCB

Metal hold down clips lock the connector easily on the PCB and release stress on solder joints. They are also suitable for soldering the connector to the PCB through metal holes.

Pre-assembled PCB contacts

- machined or stamped versions available
- different solder tail lengths possible
- different plating options



Technical features

Environmental

- Temperature class: 40/100/21 per NFF 61-030 from -40°C to +105°C
- Flammability rating:
 - UL94 V-0 (all UTSX except the sealed unmated version)
 - UL94 HB (UTSX sealed unmated version only)
 - R22 HL2 / R23 HL2 according to EN45545-2 (not applicable for hi-seal versions)
 - GWFI: 960°C
 - GWIT: 800°C
- Salt spray: per EIA-364-26: 500 hours
- UV resistant connector made with (f1) material according to UL746C
- Outdoor used following level 6/6P according to UL50/UL50E
- Aging validation: ISO 21207 Method B, 5 cycles. Corresponding to 27 years in an industrial environment
- Sealing:
 - UTSX standard: IP68/IP69K dynamic (mated)
 - UTSX sealed unmated version: IP68/IP69K dynamic (unmated)
 - UTSX single wire sealed: IP67/69K (up to IP68 with double sealing backshell)
 - UTSX screw termination contacts: IP68/IP69K dynamic (mated)

Note: IP68=10 m. underwater during 1 week

- Fluid resistance:
 - Gas and oil
 - Mineral oil
 - Acid bath
 - Basic bath

Materials

- Connector body and backshell: thermoplastic
- Insert:
 - UTSX standard, UTSX single wire sealed UTSX screw termination contacts: thermoplastic
 - UTSX Hi-seal: elastomer
- Nut: metal
- Locking ring: brass and stainless steel
- Contacts: see **Page 125**
- Halogen free
- RoHS compliant and conforms to the Chinese standard SJ/T1166-2006 (Chinese RoHS equivalent)

Electrical

- In accordance with:
 - UL 1977: category ECBT2 file number: E169916
 - C22.2 n°182.3: category ECBT8 file number: E169916
- Voltage and current information available on **Pages 9 to 11**

Mechanical








- Durability: 250 matings and unmatings according to MIL -C-26482
- Vibration resistance (all UTSX versions except UTSX screw termination contacts):
 - Sinusoidal vibrations per EN 60512-4 - from 10 to 2000 Hz
 - Sinusoidal vibrations according to CEI 60512-6-4
- Thermal shock: 5 cycles 30 min. from -40°C to 105°C per MIL -STD-1344 method 1003
- IK resistors: see table below for shock resistance

Connector type	Size 10	Size 12	Size 14
UTSX0 / UTSX6JC	IK03	IK05	IK05
UTSX7 / UTSX6JC	—	IK05	IK05

Layouts face male contact

Electrical parameter according to IEC61984 for a pollution degree IV and overvoltage category III.

A higher voltage can be applied by selecting the appropriate connectors and contacts. Please consult us for more information.

Contacts	Contact #16 (Ø 0.062"/1.6 mm)	Contacts	Contact #20 (Ø 0.039"/1.0 mm)	Contacts	Hybrid and others
Description (mating face view male connectors)		Description (mating face view male connectors)		Description (mating face view male connectors)	
	103 16A/300V 2 + ground Page 18		106 – 10E6/10D6 7A/32V 6 contacts Page 56		102W2 25A/150V 4 contact 2 x Ø 2.4 (#12) + 2 x Ø 1.0 (#20) Page 36
					
	104 13A/150V 4 contacts Page 41		10E98/10D98 7A/50V 6 contacts Page 61		103W3 5A/32V 6 contacts 3 x Ø 1.6 (#16) + 3 x Ø 1.0 (#20) Page 50
					
			10E7/10D7 7A/50V 7 contacts Page 70		

Note: Layouts in blue text are UTSX sealed unmated (Hi-seal) condition

Contacts #20:
from AWG 26 to 18
0.005" to 0.031"²
0.13 to 0.80 mm²

Contacts #16:
from AWG 30 to 14
0.002" to 0.098"²
0.05 to 2.5 mm²








Contacts #12:
from AWG 20 to 12
0.005" to 0.157"²
0.52 to 4 mm²

Contacts #8:
from AWG 16 to 8
0.059" to 0.393"²
1.5 to 10 mm²

Layouts face male contact

Electrical parameter according to IEC61984 for a pollution degree IV and overvoltage category III.

A higher voltage can be applied by selecting the appropriate connectors and contacts. Please consult us for more information.

Contacts	Contact #16 (Ø 0.062"/1.6 mm)	Contacts	Contact #20 (Ø 0.039"/1.0 mm)
Description (mating face view male connectors)		Description (mating face view male connectors)	
	12E2/12D2 16A/150V 2 contacts Page 14		12E8/12D8 6A/32V 8 contacts Page 79
			
	12E3/12D3 16A/150V 3 contacts Page 27		12I0 – 12E10/12D10 6A/50V 10 contacts Page 89
			
	124 – 12E4/12D4 16A/150V 3 + ground Page 31		12E14/12D14 5A/32V 14 contacts Page 108
			
	128 10A/80V 8 contacts Page 74		











Note: Layouts in blue text are UTSX sealed unmated (Hi-seal) condition

Contacts #20: from AWG 26 to 18 0.005" to 0.031" ² 0.13 to 0.80 mm ²	Contacts #16: from AWG 30 to 14 0.002" to 0.098" ² 0.05 to 2.5 mm ²	Contacts #12: from AWG 20 to 12 0.020" to 0.157" ² 0.52 to 4 mm ²	Contacts #8: from AWG 16 to 8 0.059" to 0.393" ² 1.5 to 10 mm ²
---	--	--	--

Layouts face male contact

Electrical parameter according to IEC61984 for a pollution degree IV and overvoltage category III.

A higher voltage can be applied by selecting the appropriate connectors and contacts. Please consult us for more information.

Contacts	Contact #16 (Ø 0.062"/1.6 mm)	Contacts	Contact #20 (Ø 0.039"/1.0 mm)	Contacts	Mixed power
Description (mating face view male connectors)		Description (mating face view male connectors)		Description (mating face view male connectors)	
	14E5/14D5 16A/150V 5 contacts Page 46		14E18/14D18 5A/50V 18 contacts Page 116		148 17A/230V 8 contacts 4 x Ø 1.6 (#16) + 3 x Ø 2.4 (#12) + ground Page 83
					
	147 – 14E7/14D7 7A/150V 6 + ground Page 65		1419 – 14E19/14D19 5A/32V 19 contacts Page 120		14E12/14D12 4A/50V 12 contacts 4 x Ø 1.6 (#16) + 8 x Ø 1.0 (#20) Page 99
		Contacts	Contact #8 (Ø 0.141"/3.6 mm)		
	1412 10A/63V 12 contacts Page 94	Description (mating face view male connectors)			14E15/14D15 4A/50V 15 contacts 1 x Ø 1.6 (#16) + 14 x Ø 1.0 (#20) Page 112
			142G1 40A/300V 2 + ground Page 23		
	1492 10A/63V 12 contacts Page 103				

Note: Layouts in blue text are UTSX sealed unmated (Hi-seal) condition

Contacts #20:
from AWG 26 to 18
0.005" to 0.031"²
0.13 to 0.80 mm²

Contacts #16:
from AWG 30 to 14
0.002" to 0.098"²
0.05 to 2.5 mm²

Contacts #12:
from AWG 20 to 12
0.020" to 0.157"²
0.52 to 4 mm²

Contacts #8:
from AWG 16 to 8
0.059" to 0.393"²
1.5 to 10 mm²



Souriau UTSX series

Overmolded cable assembly

Overmolded cable assembly

Overmolding is a process that further enhances the sealing properties of the UTSX series, especially over many years of use. Overmolding provides the opportunity to change the cable exit from straight to 90 degrees and avoid stress on the cable terminated to the connector. Also, as the wires are encapsulated inside the moulding, a barrier is created which prevents any liquid from entering the equipment through the connector if the cable jacket is breached.

How to choose the outer jacket material

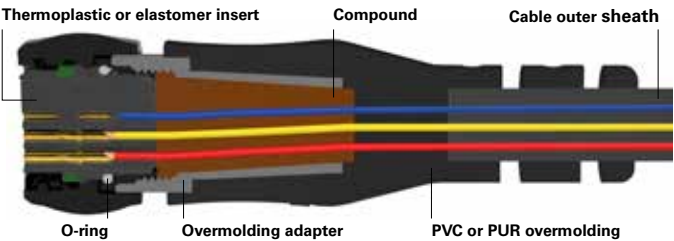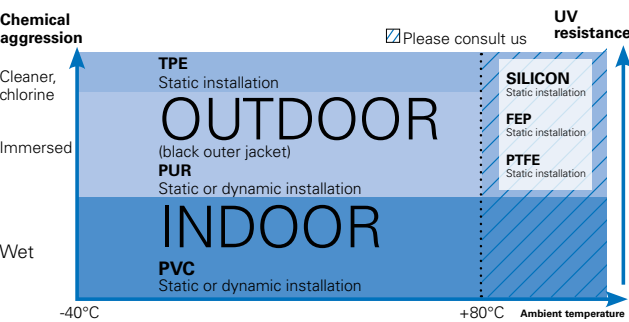

Connector with cable gland backshell

GOOD



Overmolded connector

BEST



UTSX waterproof plastic overmold



HAUTSX standard offering

- Cable
- PVC outer sheath (grey color)
 - Wire section 16 AWG for #16 contact
 - Wire section 20 AWG for #20 contact
 - 300V
 - Unshielded
 - Operating temperature: -40°C +70°C

Overmolding specifications

Plating	Salt spray	Temperature*	Waterproof*	Mechanical
No plating	500 H	-30°C up to + 50°C	IP68/IP69K dynamic (mated)	250 matings/unmatings

* With appropriate cable and overmolding

Cable information

Range of temperature	Rated voltage	Wire section	Harmonized reference
-30°C +50°C	U0/U: 300/500V	Layouts with #16 contact: wire section 0.196”² (5 mm²)	H05 VV - F XX

Example of customized cable assemblies



Overmolding on curly cable

Overmolding with double ends

Harness for PCB connection


Souriau UTSX series

12E2/12D2 (Shell size 12, 2x#16)



Connector part number

UTSX 12E2/12D2



2 contacts + ground
13A/600V per UL 1977
with AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Hand solder electrical con- tacts loaded see Page 17	Square flange receptacle	Without (Fig. 1)	UTSX012E2P	UTSX012E2S
	Plug	Without (Fig. 5)	UTSX612E2P	UTSX612E2S
		Cable gland (Fig. 3)	UTSX6JC12E2P	UTSX6JC12E2S
	Jam nut receptacle	Without (Fig. 4)	UTSX712E2P	UTSX712E2S
PCB contacts loaded see Page 17	Square flange receptacle	Without (Fig. 2)	UTSX012D2P	UTSX012D2S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX712D2P	UTSX712D2S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX712D2P32	UTSX712D2S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0


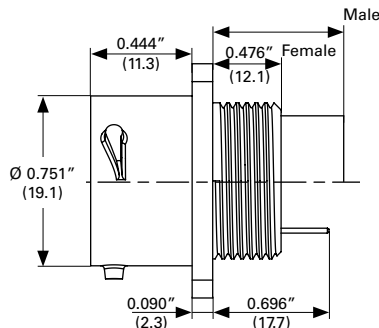


Fig. 1



Plug - UTSX6 and UTSX6JC

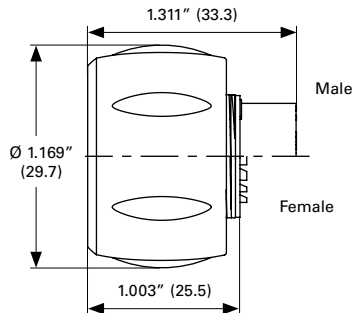


Fig. 2

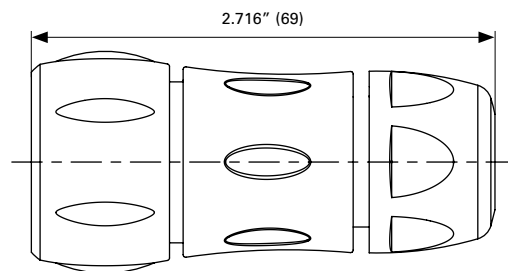


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7

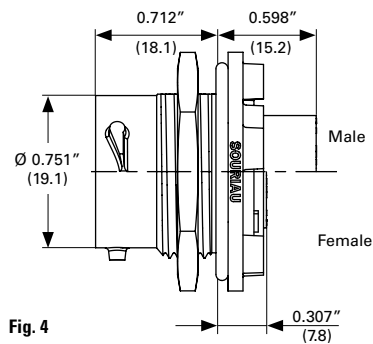


Fig. 4




Fig. 5






Fig. 6




Panel cut out

Square flange receptacle - UTSX0

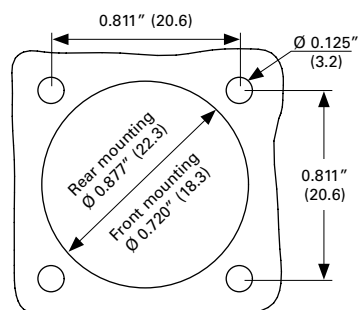

Dimensions in inches (millimeters)

Jam nut receptacle - UTSX7

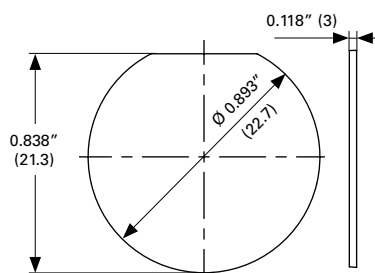

Souriau UTSX series

12E2/12D2 (Shell size 12, 2x#16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Contacts #16

Contact type	Plating	Cable acceptance (AWG)	Cable acceptance		Wire stripping length	
			inch ²	mm ²	inch	mm
Handsolder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	18-14	0.031"-0.098"	0.80-2.48	0.196"	5
PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—


(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
13A 600V with AWG16 wire	13A 600V with AWG16 wire	16A 150V 2.5kV 3

Electrical information according to the IEC 61984, with pollution degree IV and overvoltage category III.

UTSX 12E2/12D2 derating curves

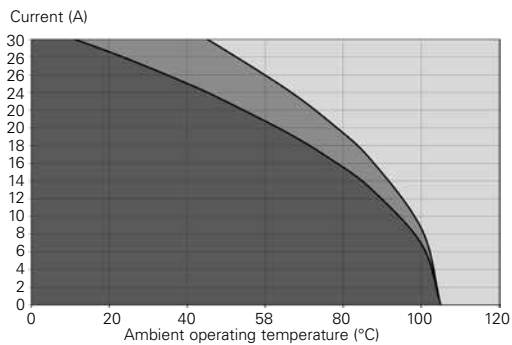

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

103 (Shell size 10, 2 + ground, 3x#16)



Connector part number

UTSX 103



2 contacts +
ground 10A/500V
per UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 22	Square flange receptacle	Without (Fig. 1)	UTSX0103P	UTSX0103S
		Cable gland (Fig. 2)	UTSX0JC103P	UTSX0JC103S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC103P	UTSX1JC103S
	Plug	Without (Fig. 4)	UTSX6103P	UTSX6103S
		Cable gland (Fig. 5)	UTSX6JC103P	UTSX6JC103S
	Jam nut receptacle	Without (Fig. 6)	UTSX7103P	UTSX7103S
PCB contacts supplied separately see Page 22	Jam nut receptacle	Without (Fig. 7)	UTSX7103P	UTSX7103S

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

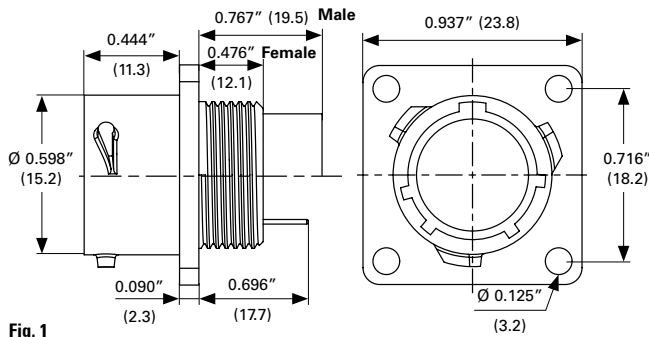


Fig. 1

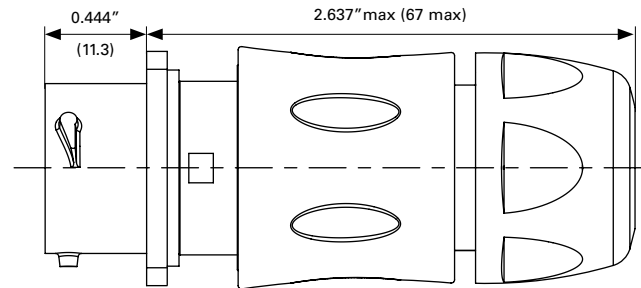


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC

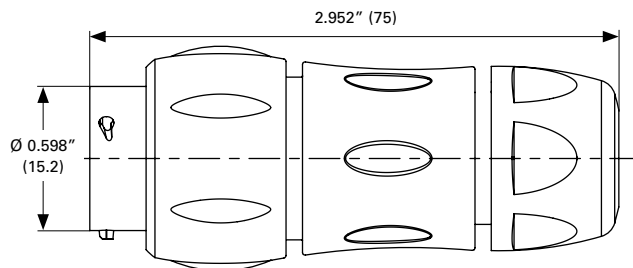


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Plug - UTSX6 and UTSX6JC

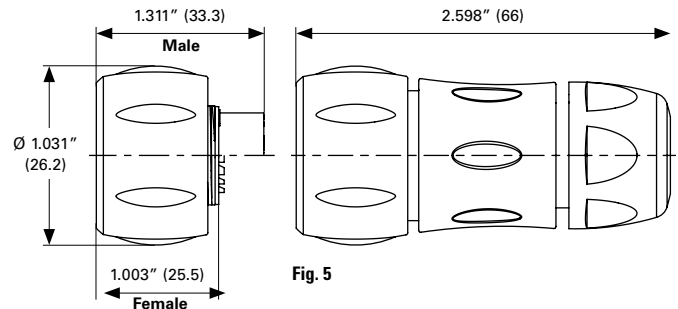


Fig. 4

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7

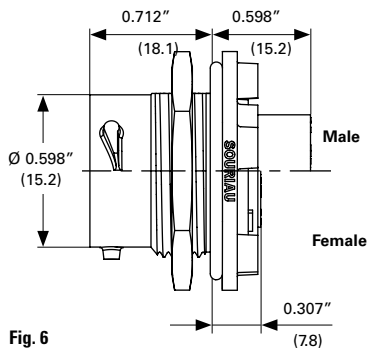


Fig. 6



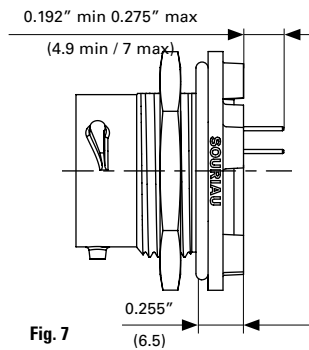


Fig. 7




Panel cut out

Square flange receptacle - UTSX0

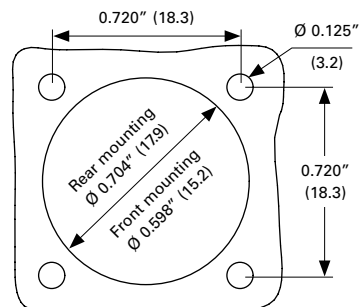

Jam nut receptacle - UTSX7

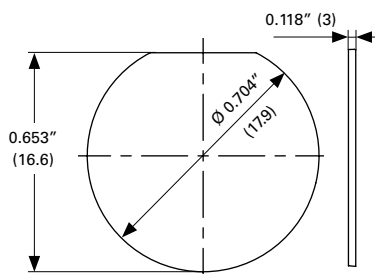

Dimensions in inches (millimeters)

Souriau UTSX series

103 (Shell size 10, 2 + ground, 3x#16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Square flange sealing cap



Description	Part number
IP68-Metal terminal	UTS10DCGE

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Plug sealing cap



Description	Part number
IP68	UTS10DCGE

Color coding rings




Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Tooling

#20 and #16 stamped or machined contacts



Crimp tooling (without Shandles)



Handle Head Complete set

Description

Handle (without head)
Box containing handle and several crimp tooling

Part number

Shandles
Toolkit

Contact size

Standard contacts
#16
Ø 0.062" (1.6)

Contacts

RM/RC 28M1K⁽¹⁾
RM/RC 24M9K⁽¹⁾
RM/RC 20M13K⁽¹⁾
RM/RC 20M12K⁽¹⁾
RM/RC 16M23K⁽¹⁾
RM/RC 14M30K⁽¹⁾
SM/SC 24ML1TK6⁽¹⁾
SM/SC 20ML1TK6⁽¹⁾
SM/SC 16ML1TK6⁽¹⁾
SM/SC 14ML1TK6⁽¹⁾
SM/SC 16ML11TK6⁽¹⁾

Part number of Head

S16RCM20*
S16RCM20*
S16RCM20*
S16RCM20*
S16RCM16*
S16RCM14*
S16SCM20*
S16SCM20*
S16SCML1*
S16SCML1*
S16SCML11*

(1): Example of plating, for other plating options see [Page 126](#)

* Heads to be used with handle PN: SHANDLES

#16, #12 and #8 machined contacts



Description

Crimp tool
Die casts and stop bushings

Part number

M20S-1J
See [Page 138](#)

Extraction tool #16

Fig. 1



Fig. 2



Description

Fig. 1
Fig. 2 - Long endurance tool

Part number

RX2025GE1
RX2031J

Souriau UTSX series

103 (Shell size 10, 2 + ground, 3x#16)

Contacts #16

Contact style	Contact type	Cable acceptance		Part number	Wire Ø max	Insulator Ø max	
		AWG	inch ² mm ²	Male		inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003" 0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55
		26-24	0.005"-0.009" 0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80
		22-20	0.012"-0.020" 0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15
		22-20	0.012"-0.020" 0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15
		20-16	0.020"-0.059" 0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80
		16-14	0.059"-0.098" 1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009" 0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—
		22-20	0.012"-0.020" 0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—
		18-16	0.031"-0.059" 0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—
		18-16	0.031"-0.059" 0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—
PCB	Machined ⁽³⁾	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—
	—	—	—	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132		RMDXK10D28	RCDXK1D28	—	—
	Cable monocrimp	see Pages 130 to 132		RMDX60xxD28	RCDX60xxD28	—	—
	Twisted pair multipiece	see Pages 130 to 132		RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—
	Twisted pair monocrimp	see Pages 130 to 132		RMDX60xxD28	RCDX60xxD28	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—	—	RMP0F1000	RCP0F1000B	—	—

(1): Example of plating, for other plating see Page 126

(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6


(3): For dimensions see Page 133

Electrical characteristics

UL	CSA	IEC
10A 500V with AWG16 wire	7A 500V with AWG16 wire	16A 300V 4kV 3 temperature elevation: 50°C

Electrical information according to the IEC 61984, with pollution degree IV and overvoltage category III.

UTSX 103 derating curves

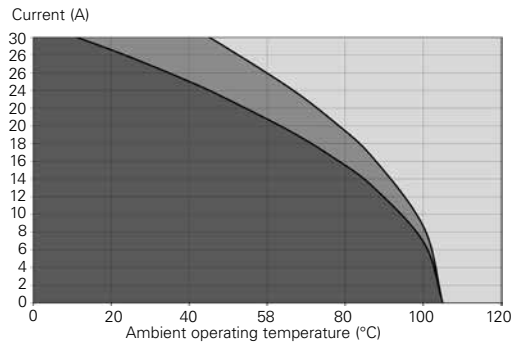

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 142G1



2 contacts + ground
Up to 44A/600V per UL
1977 with AWG8 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 26	Square flange receptacle	Without (Fig. 1)	UTSX0142G1P	UTSX0142G1S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC142G1P	UTSX0JC142G1S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC142G1P	UTSX1JC142G1S
	Plug	Without (Fig. 4)	UTSX6142G1P	UTSX6142G1S
	Plug	Cable gland (Fig. 5)	UTSX6JC142G1P	UTSX6JC142G1S
	Jam nut receptacle	Without (Fig. 6)	UTSX7142G1P	UTSX7142G1S
PCB contacts supplied separately see Page 26	Jam nut receptacle	Without (Fig. 7)	UTSX7142G1P	UTSX7142G1S

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

142G1 (Shell size 14, 2 + ground, 3x#8)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

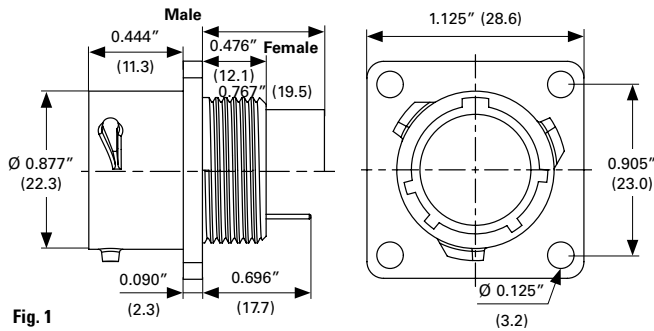


Fig. 1

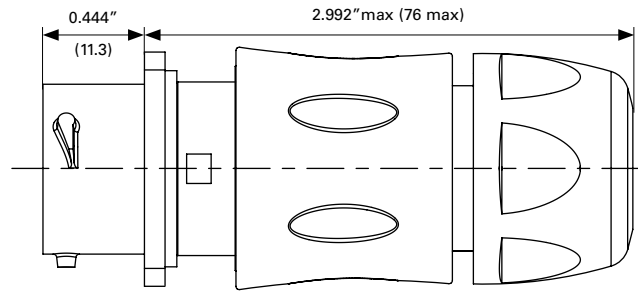


Fig. 2

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC

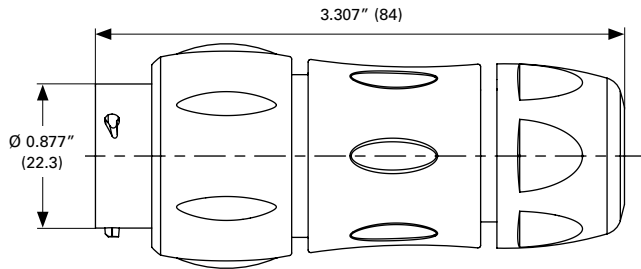


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6 and UTSX6JC

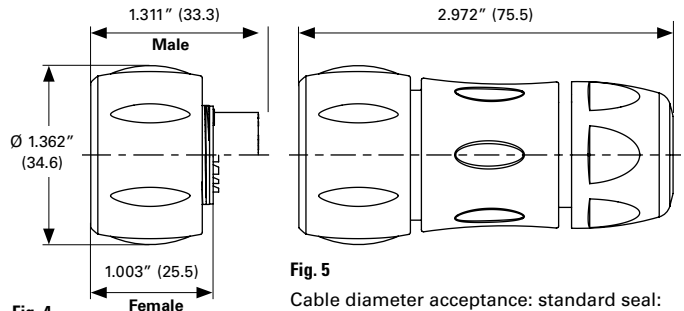


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

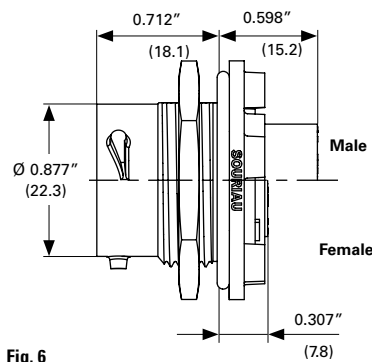


Fig. 6






Fig. 7




Panel cut out

Square flange receptacle - UTSX0

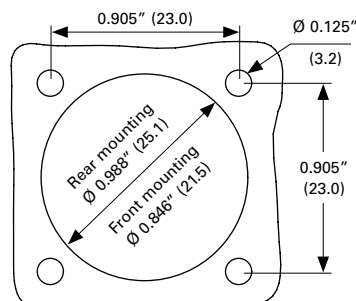

Jam nut receptacle - UTSX7

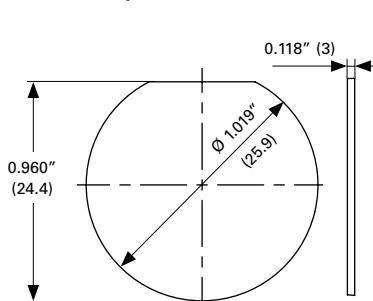

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Square flange sealing cap



Description	Part number
IP68-Metal terminal	UTS14DCGE

Souriau UTSX series

142G1 (Shell size 14, 2 + ground, 3x#8)

Tooling

#8 machined contacts



Description	Part number
Shandle only	M317

Positioner + Locator setting #8



Description	Part number
For crimp contacts #8 Ø 0.141" (3.6)	VGE10078A

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #8



Description	Part number
For crimp contacts #8 Ø 0.141" (3.6)	51060210936

Contacts #8

Contact style	Contact type	Cable acceptance	Cable acceptance		Part number		Wire Ø max inch		Insulator Ø max	
		AWG	inch²	mm²	Male	Female	mm	inch	mm	
Crimp contacts	Machined	16	0.059"	1.48	82913601A ⁽¹⁾	82913600A ⁽¹⁾	0.067"	1.72	0.255"	6.5
Crimp contacts	Machined	14	0.098"	2.48	82913603A ⁽¹⁾	82913602A ⁽¹⁾	0.087"	2.20	0.255"	6.5
Crimp contacts	Machined	12	0.157"	4.00	82913605A ⁽¹⁾	82913604A ⁽¹⁾	0.111"	2.82	0.255"	6.5
Crimp contacts	Machined	10	0.236"	6.00	82913607A ⁽¹⁾	82913606A ⁽¹⁾	0.137"	3.48	0.255"	6.5
Crimp contacts	Machined	8	0.393"	10.00	82913609A ⁽¹⁾	82913608A ⁽¹⁾	0.171"	4.35	0.255"	6.5
PCB	Machined ⁽²⁾	—	—	—	82911685NPC ⁽¹⁾	82911684NPC ⁽¹⁾	—	—	—	—


(1): Example of plating, for other plating see Page 126

(2): for dimensions see Pages 133 or 134

Electrical characteristics

UL	CSA	IEC
44A 600V with AWG8 wire	34A 600V with AWG8 wire	40A 300V 4kV 3

UTSX 142G1 derating curves

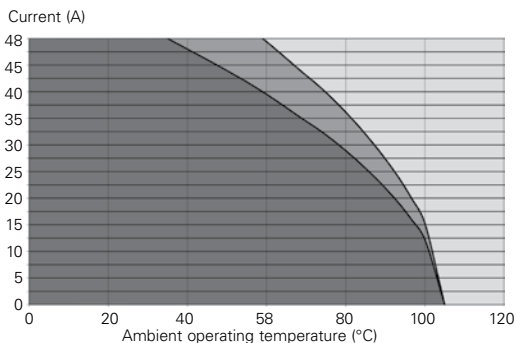

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 8 AWG


Derating curves based on continuous current application.

Dimensions in inches (millimeters)



Connector part number

UTSX 12E3/12D3



2 contacts
13A/600V per
UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 30	Square flange receptacle	Without (Fig. 1)	UTSX012E3P	UTSX012E3S
	Plug	Without (Fig. 2)	UTSX612E3P	UTSX612E3S
	Plug	Cable gland (Fig. 3)	UTSX6JC12E3P	UTSX6JC12E3S
	Jam nut receptacle	Without (Fig. 4)	UTSX712E3P	UTSX712E3S
PCB contacts loaded see Page 30	Square flange receptacle	Without (Fig. 2)	UTSX012D3P	UTSX012D3S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX712D3P	UTSX712D3S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX712D3P32	UTSX712D3S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

12E3/12D3 (Shell size 12, 3x#16)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0


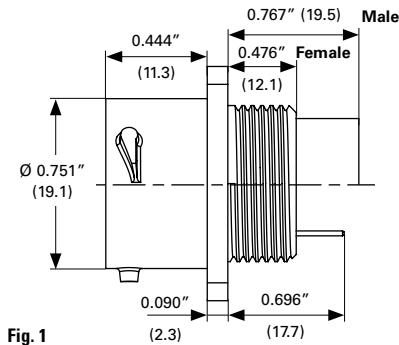


Fig. 1

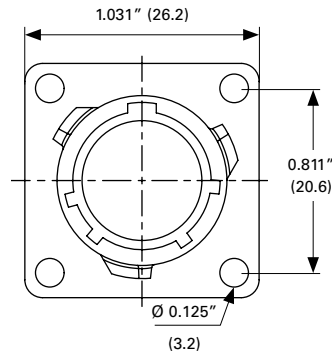

Plug - UTSX6 and UTSX6JC

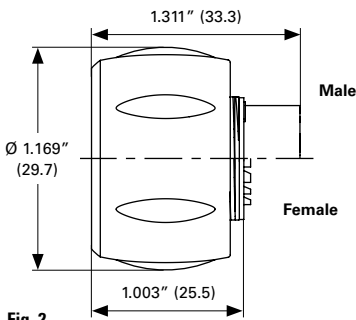


Fig. 3

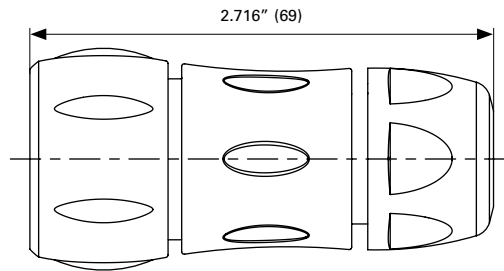


Fig. 4

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7

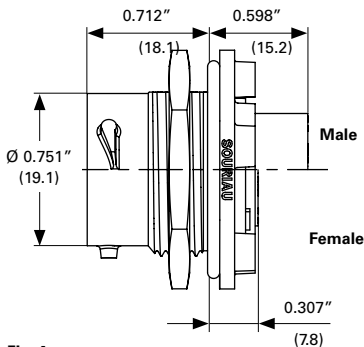


Fig. 5




Fig. 6






Fig. 7




Panel cut out

Square flange receptacle - UTSX0

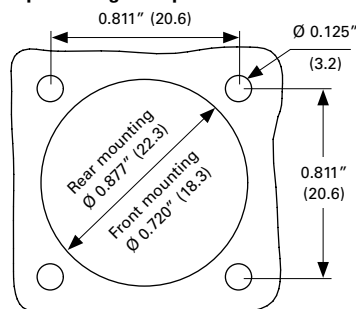

Jam nut receptacle - UTSX7

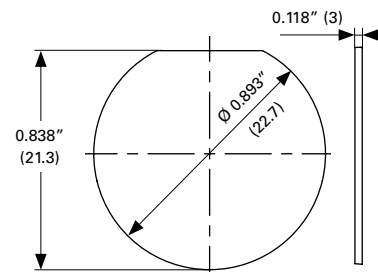

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Souriau UTSX series

12E3/12D3 (Shell size 12, 3x#16)

Contacts #16


Contact type	Plating	Cable acceptance	Cable acceptance		Wire stripping length	
		(AWG)	inch ²	mm ²	inch	mm
Handsolder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	18-14	0.031”-0.098”	0.80-2.48	0.196”	5
PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—

(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
13A 600V with AWG16 wire	13A 600V with AWG16 wire	16A 150V 2.5kV 3

UTSX 12E3/12D3 derating curves

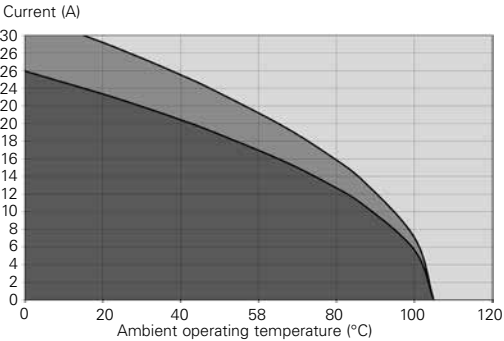

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 124



3 contacts + ground
16A/500V per UL 1977
with AWG14 wire

12E4/12D4

3 contacts + ground
13A/600V per UL 1977
with AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 35	Square flange receptacle	Without (Fig. 1)	UTSX0124P	UTSX0124S
		Cable gland (Fig. 2)	UTSX0JC124P	UTSX0JC124S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC124P	UTSX1JC124S
	Plug	Without (Fig. 4)	UTSX6124P	UTSX6124S
		Cable gland (Fig. 5)	UTSX6JC124P	UTSX6JC124S
	Jam nut receptacle	Without (Fig. 6)	UTSX7124P	UTSX7124S
Screw contacts loaded	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC124PSCR	UTSX1JC124SSCR
	Plug	Cable gland (Fig. 5)	UTSX6JC124PSCR	UTSX6JC124SSCR
	Jam nut receptacle	Without (Fig. 9)	UTSX7124PSCR	UTSX7124SSCR
PCB contacts supplied separately see Page 35	Square flange receptacle	Without (Fig. 1)	UTSX0124P	UTSX0124S
	Jam nut receptacle	Without (Fig. 7)	UTSX7124P	UTSX7124S
Handsolder electrical contacts loaded see Page 35	Square flange receptacle	Without (Fig. 1)	UTSX012E4P	UTSX012E4S
	Plug	Without (Fig. 4)	UTSX612E4P	UTSX612E4S
		Cable gland (Fig. 5)	UTSX6JC12E4P	UTSX6JC12E4S
	Jam nut receptacle	Without (Fig. 6)	UTSX712E4P	UTSX712E4S
PCB contacts loaded	Square flange receptacle	Without (Fig. 3)	UTSX012D4P	UTSX012D4S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig.7)	UTSX712D4P	UTSX712D4S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 8)	UTSX712D4P32	UTSX712D4S32

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

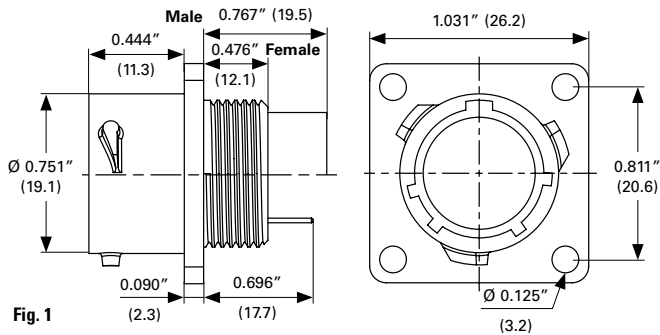


Fig. 1

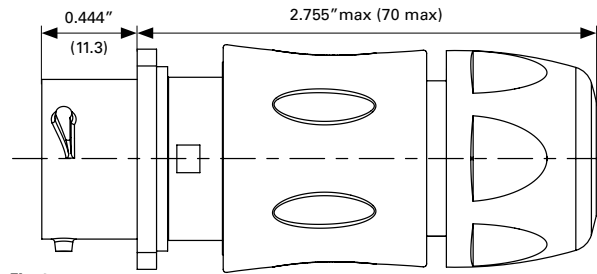


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Free hanging - UTSX1JC

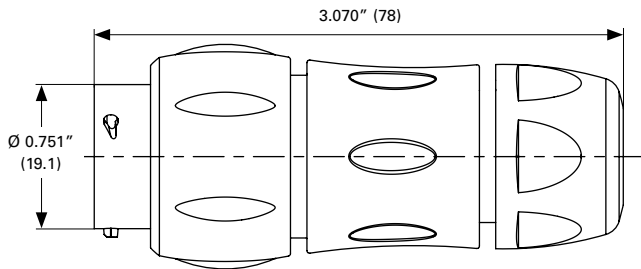


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Plug - UTSX6 and UTSX6JC

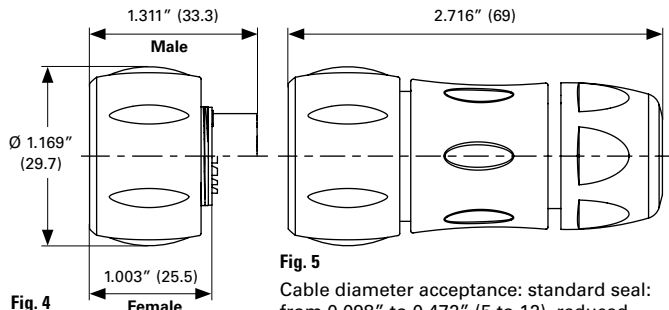


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7

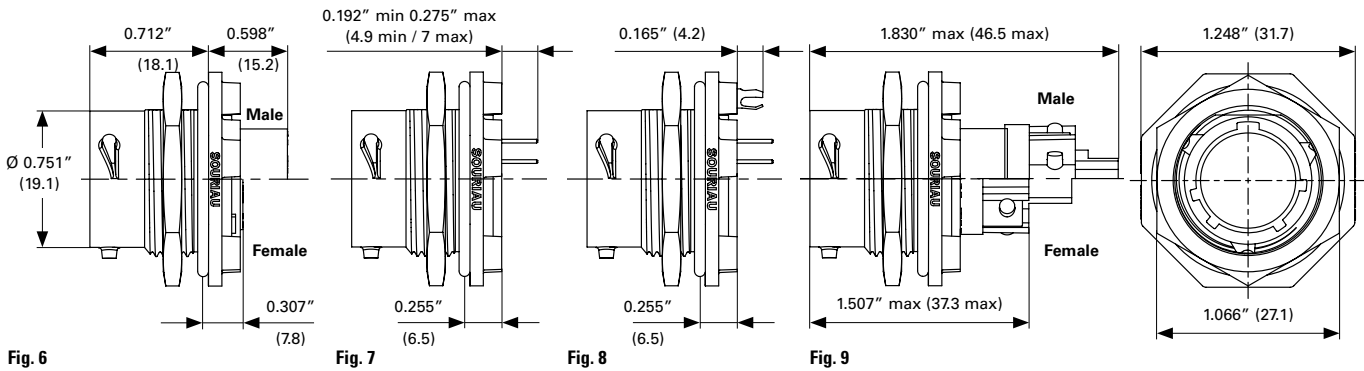


Fig. 6

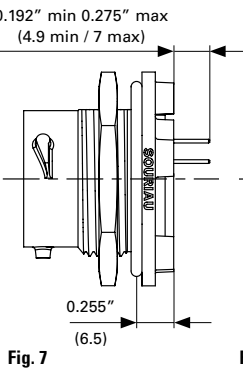


Fig. 7

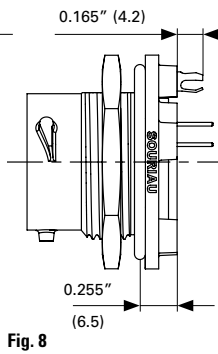


Fig. 8



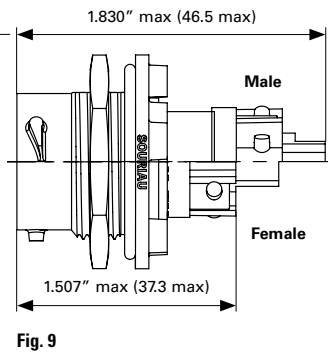


Fig. 9




Panel cut out

Square flange receptacle - UTSX0

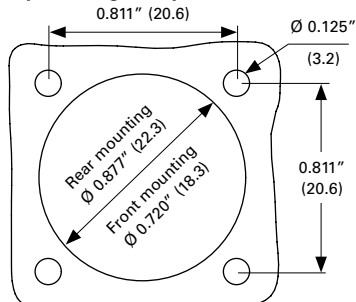

Jam nut receptacle - UTSX7

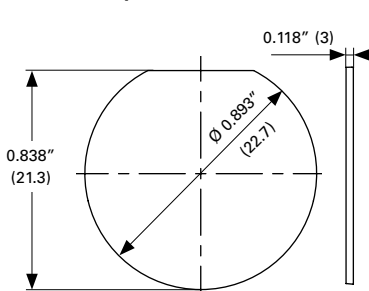

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Souriau UTSX series

124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)


Tooling

#16 stamped or machined contacts



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see Page 126
* Heads to be used with handle PN: SHANDLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16

Fig. 1



Fig. 2



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contacts #16


		Cable acceptance	Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
	PCB	Machined ⁽³⁾	—	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp				RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece				RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—	—	—
	Twisted pair monocrimp				RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—	—	—	RMP0F1000	RCPOF1000B	—	—	—	—
Handsolder	Loaded in the connector	14-18	0.098"-0.031"	2.48-0.80	—	—	—	—	—	—

(1): Example of plating, for other plating see **Page 126**(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6 (3): For dimensions see **Page 133**

Electrical characteristics

UL	CSA	IEC
UTSX 124 16A 500V with AWG14 wire	16A 500V with AWG14 wire	16A 150V 2.5kV 3 temperature elevation: 50°C
UTSX 12E4/12D4 13A 600V with AWG16 wire	13A 600V with AWG16 wire	16A 150V 2.5kV 3 temperature elevation: 50°C

UTSX 124 - 12E4/12D4 derating curves

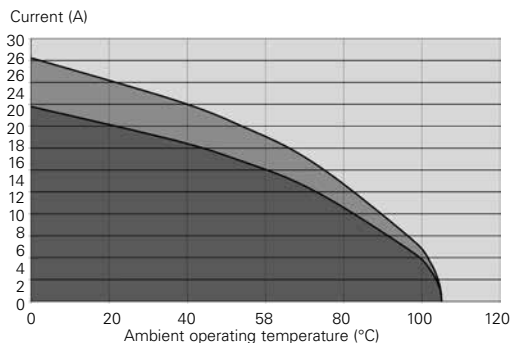

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

102W2 (Shell size 10, 2x#20, 2x12)



Connector part number

UTSX 102W2



4 contacts
26A/600V per UL1977
with AWG12 wire
7.5A/250V per UL1977
with AWG20 wire
(qualification pending)

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 40	Square flange receptacle	Without (Fig. 1)	UTSX0102W2P	UTSX0102W2S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC102W2P	UTSX0JC102W2S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC102W2P	UTSX1JC102W2S
	Plug	Without (Fig. 4)	UTSX6102W2P	UTSX6102W2S
	Plug	Cable gland (Fig. 5)	UTSX6JC102W2P	UTSX6JC102W2S
	Jam nut receptacle	Without (Fig. 6)	UTSX7102W2P	UTSX7102W2S

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

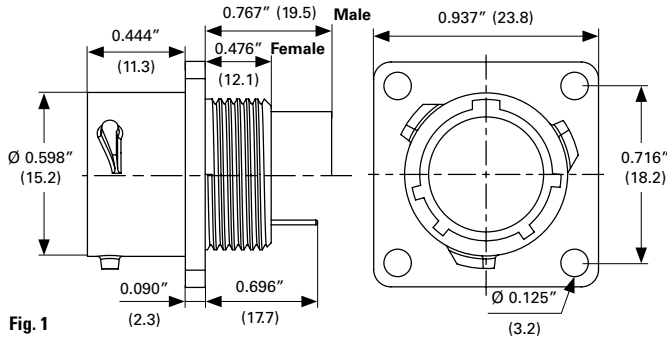


Fig. 1

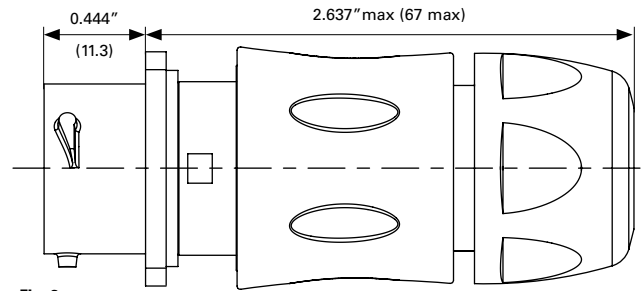


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC

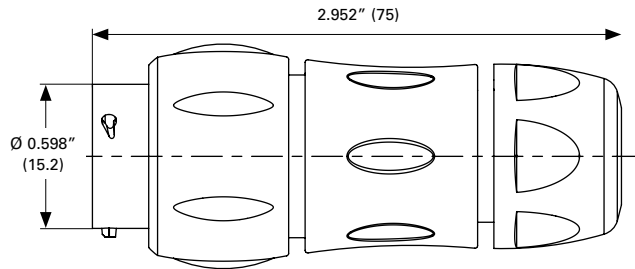


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC

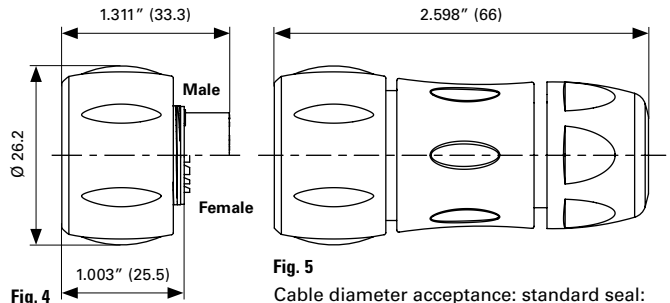


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7



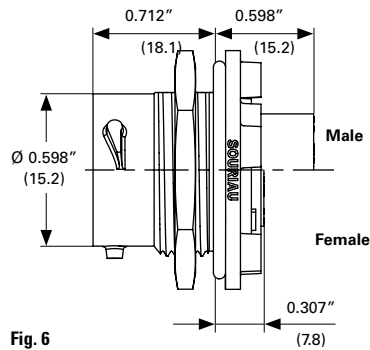


Fig. 6




Panel cut out

Square flange receptacle - UTSX0

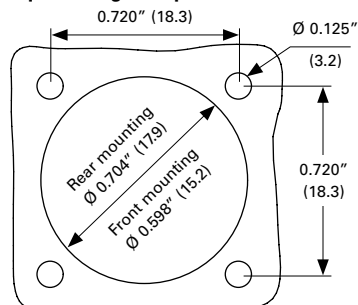

Jam nut receptacle - UTSX7

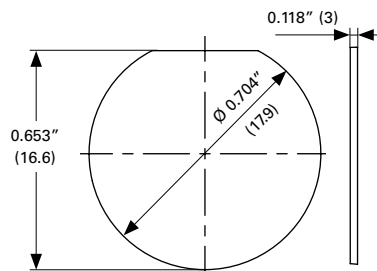

Dimensions in inches (millimeters)

Souriau UTSX series

102W2 (Shell size 10, 2x#20, 2x12)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS10DCGE

Tooling

#20 machined and stamped contacts



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #20 Ø 0.039" (1)	RM/RC 24W3K ⁽¹⁾	S20RCM*
	RM/RC 20W3K ⁽¹⁾	S20RCM*
	RM/RC 18W3K ⁽¹⁾	S20RCM*
	SM/SC 24WL3 ⁽¹⁾⁽²⁾	S20SCM20*
	SM/SC 20WL3 ⁽¹⁾⁽²⁾	S20SCM20*

(1): Example of plating, for other plating options see **Page 126**

(2): Loose contact

* Heads to be used with handle PN: SHANGLES

Crimp tooling #12



Contact size	Part number hand tool	Part number positioner + locator setting
Standard contacts #12 Ø 0.094" (2.4)	M317	VGE10077A

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool

Fig. 1



Fig. 2



Description	Part number
Fig. 1 - Contacts #20 Ø 0.039" (1)	RX20D44
Fig. 2 - Contacts #12 Ø 0.094" (2.4)	51060210924

Souriau UTSX series

102W2 (Shell size 10, 2x#20, 2x12)

Contacts #20

Contact style	Contact type	Cable acceptance		Part number	Wire Ø max		Insulator Ø max	
		AWG	inch ²	mm ²	Male	Female	inch	mm
Crimp contacts	Machined	26-24	0.005"-0.009"	0.13-0.25	RM24W3K	RC24W3K	0.031"	0.80
		22-20	0.012"-0.020"	0.32-0.52	RM20W3K	RC20W3K	0.045"	1.15
		20-18	0.020"-0.031"	0.52-0.80	RM18W3K	RC18W3K	0.051"	1.30
	Stamped and formed reeled contacts See note ⁽¹⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24W3TK6 ⁽¹⁾	SC24W3TK6 ⁽¹⁾	—	—
		26-24	0.005"-0.009"	0.13-0.25	SM24W3S26 ⁽¹⁾	SC24W3S25 ⁽¹⁾	—	—
		22-20	0.012"-0.020"	0.32-0.52	SM20W3TK6 ⁽¹⁾	SC20W3TK6 ⁽¹⁾	—	—
		22-20	0.012"-0.020"	0.32-0.52	SM20W3S26 ⁽¹⁾	SC20W3S25 ⁽¹⁾	—	—

(1): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20W3TK6 becomes SM20WL3TK6

Contacts #12


Contact style	Contact type	Cable acceptance		Part number	Wire Ø max		Insulator Ø max	
		AWG	inch ²	mm ²	Male	Female	inch	mm
Crimp contacts	Machined	20	0.020"	0.52	82911457NA	82911456A	0.034"	0.87
		20	0.020"	0.52	82911459NA	82911458A	0.044"	1.12
		18	0.031"	0.80	82911461NA	82911460A	0.055"	1.42
		16	0.059"	1.48	82911463NA	82911462A	0.067"	1.72
		14	0.098"	2.48	82911465NA	82911464A	0.087"	2.20
		12	0.157"	4.00	82911467NA	82911466A	0.111"	2.82

Electrical characteristics

UL	CSA	IEC
26A 600V with AWG12* 7.5A 250V with AWG20*	20A 600V with AWG12* 2.5A 250V with AWG20*	25A 150V 2.5kV 3 temperature elevation: 50°C

* qualification pending

UTSX 102W2 derating curves

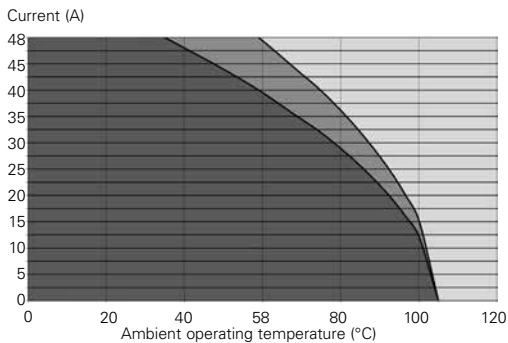

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 104



4 contacts
10A/500V per
UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 45	Square flange receptacle	Without (Fig. 1)	UTSX0104P	UTSX0104S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC104P	UTSX0JC104S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC104P	UTSX1JC104S
	Free hanging receptacle	Cable gland and grommet(Fig. 3)	UTSX1GJC104P	–
	Plug	Without (Fig. 4)	UTSX6104P	UTSX6104S
	Plug	Cable gland (Fig. 5)	UTSX6JC104P	UTSX6JC104S
	Plug	Cable gland and grommet(Fig. 5)	–	UTSX6GJC104S
	Jam nut receptacle	Without (Fig. 6)	UTSX7104P	UTSX7104S
	Jam nut receptacle	Cable gland and grommet (Fig. 8)	UTSX7GJC104P	–
PCB contacts supplied separately see Page 45	Jam nut receptacle	Without (Fig. 7)	UTSX7104P	UTSX7104S

For discrimination/keying methods see **Page 151**

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

104 (Shell size 10, 4x#16)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

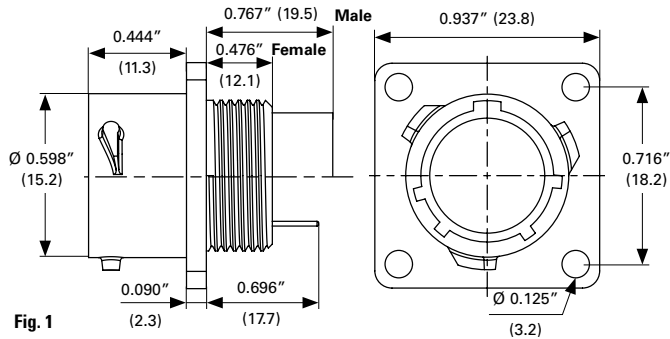


Fig. 1

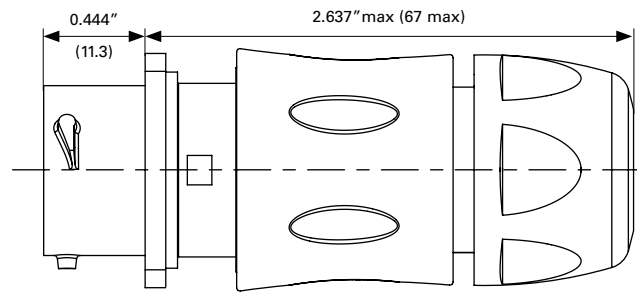


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC and UTSX1GJC

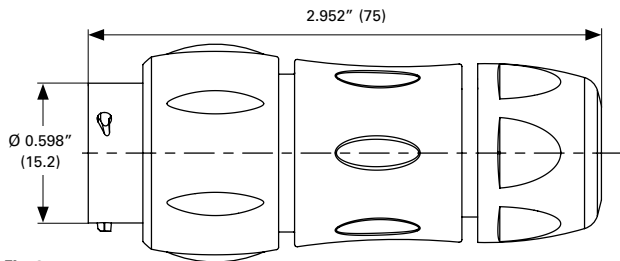


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Plug - UTSX6, UTSX6JC and UTSX6GJC

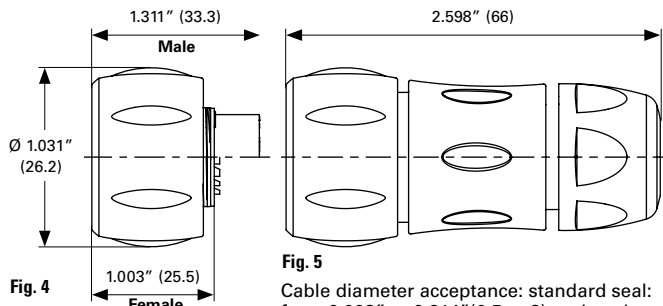


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7 and UTSX7GJC

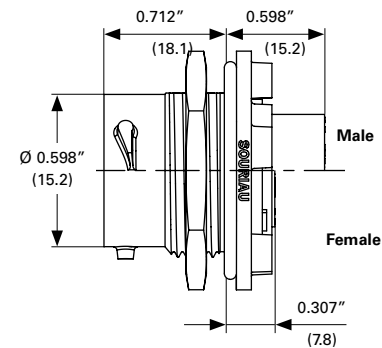


Fig. 6






Fig. 7




Panel cut out

Square flange receptacle - UTSX0

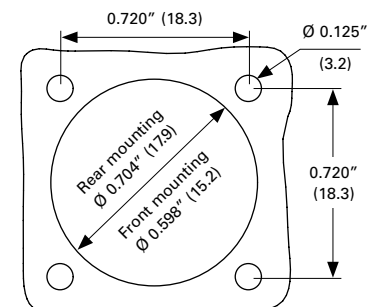

Jam nut receptacle - UTSX7

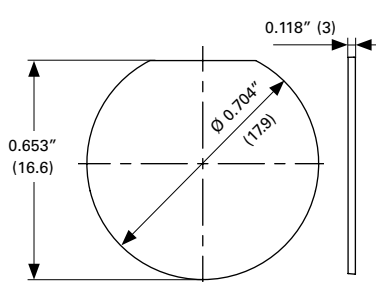

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS10DCGE

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Souriau UTSX series

104 (Shell size 10, 4x#16)

Tooling

#16 machined or stamped contacts



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see [Page 126](#)
* Heads to be used with handle PN: SHANGLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16

Fig. 1



Fig. 2



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contacts #16

		Cable acceptance	Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
	PCB	Machined ⁽³⁾	—			RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yox090	RCDXK1D28 + yox090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—			RMPOF1000	RCPOF1000B	—	—	—	—

(1): Example of plating, for other plating see Page 126


(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): for dimensions see Pages 133 or 134

Electrical characteristics

UL	CSA	IEC
10A 500V with AWG16 wire	7A 500V with AWG16 wire	13A 150V 2.5kV 3

UTSX 104 derating curves

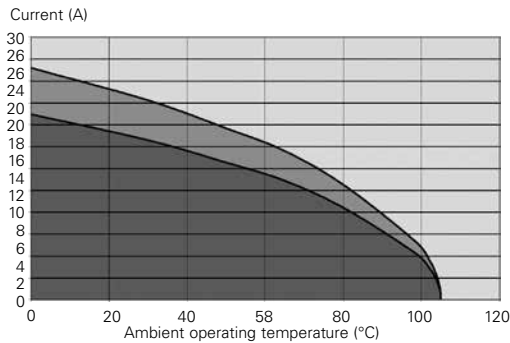

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts

Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

14E5/14D5 (Shell size 14, 5x#16)



Connector part number

UTSX 14E5/14D5



5 contacts 12A/600V
per UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Hardsolder electrical contacts loaded see Page 49	Square flange receptacle	Without (Fig. 1)	UTSX014E5P	UTSX014E5S
	Plug	Without (Fig. 2)	UTSX614E5P	UTSX614E5S
	Plug	Cable gland (Fig. 3)	UTSX6JC14E5P	UTSX6JC14E5S
	Jam nut receptacle	Without (Fig. 4)	UTSX714E5P	UTSX714E5S
PCB contacts loaded see Page 49	Square flange receptacle	Without (Fig. 2)	UTSX014D5P	UTSX014D5S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX714D5P	UTSX714D5S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX714D5P32	UTSX714D5S32

For discrimination/keying methods see **Page 151**



Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0

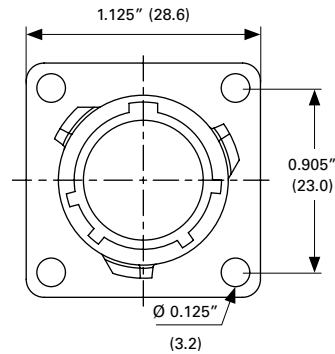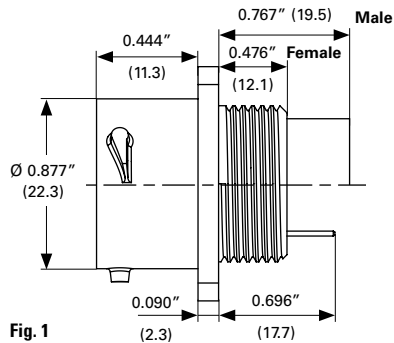

Plug - UTSX6 and UTSX6JC






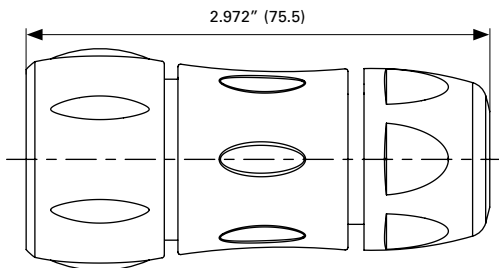


Fig. 3


Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

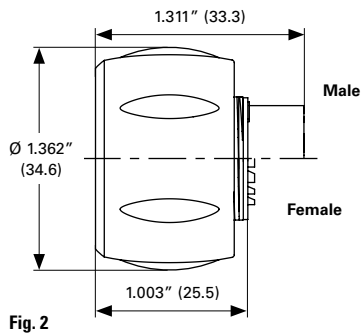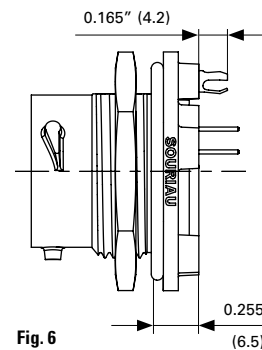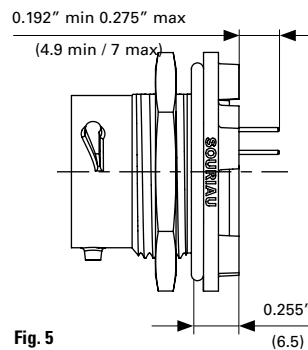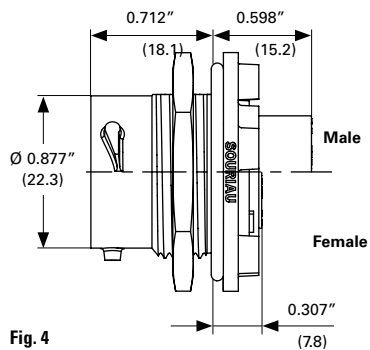


Panel cut out

Square flange receptacle - UTSX0

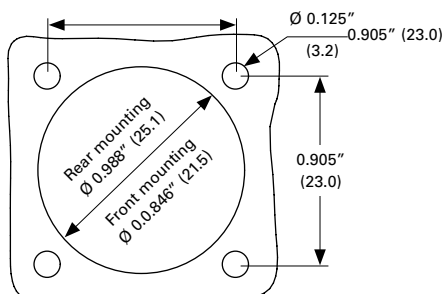

Jam nut receptacle - UTSX7

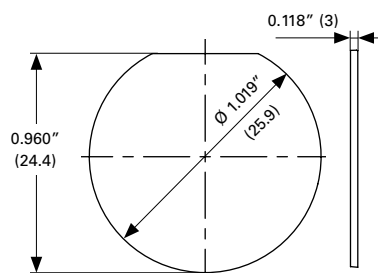

Dimensions in inches (millimeters)

Souriau UTSX series

14E5/14D5 (Shell size 14, 5x#16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Contacts

Contact size	Contact type	Plating	Cable acceptance	Cable acceptance		Wire stripping length	
			AWG	inch ²	mm ²	inch	mm
#16	Handsold Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	18 - 14	0.031" - 0.098"	0.80 - 2.48	0.196"	5
	PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—


(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
12A 600V with AWG16 wire	12A 600V with AWG16 wire	16A 150V 2.5kV 3

UTSX 14E5/14D5 derating curves

Current (A)

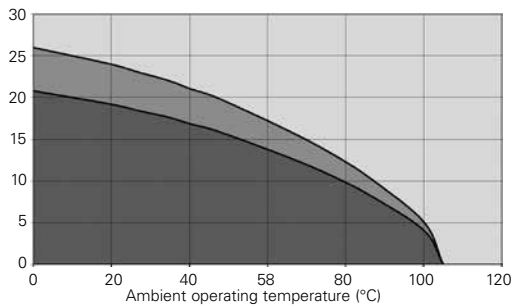

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

103W3 (Shell size 10, 3x#20, 3x16)



Connector part number

UTSX 103W3



6 contacts
13A/500V per UL1977
with AWG16 wire
7.5A/250V per UL1977
with AWG20 wire
(qualification pending)

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 54	Square flange receptacle	Without (Fig. 1)	UTSX0103W3P	UTSX0103W3S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC103P	UTSX0JC103S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC103W3P	UTSX1JC103W3S
	Plug	Without (Fig. 4)	UTSX6103W3P	UTSX6103W3S
	Plug	Cable gland (Fig. 5)	UTSX6JC103W3P	UTSX6JC103W3S
	Jam nut receptacle	Without (Fig. 6)	UTSX7103W3P	UTSX7103W3S
PCB contacts supplied separately see Page 54	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 7)	UTSX7103W3P	UTSX7103W3S

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

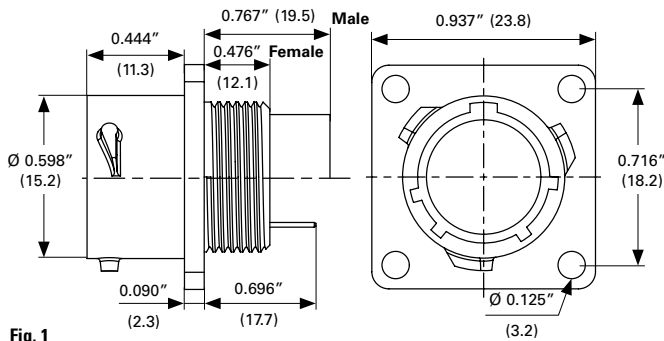


Fig. 1

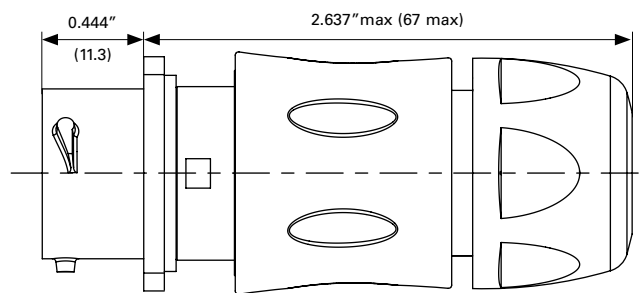


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC

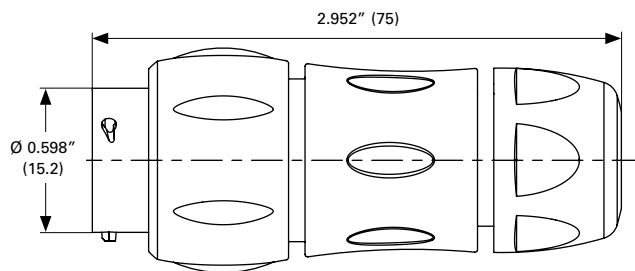


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Plug - UTSX6 and UTSX6JC

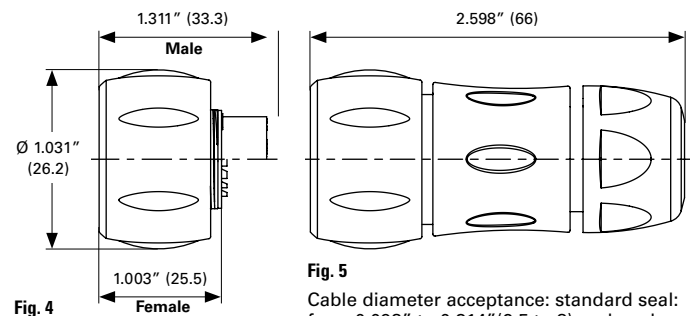


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7

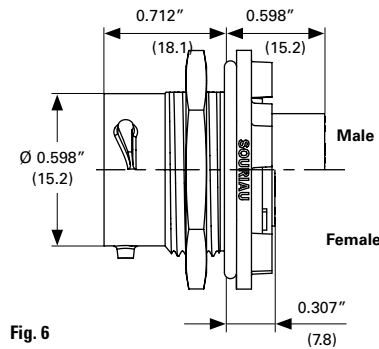


Fig. 6






Fig. 7




Panel cut out

Square flange receptacle - UTSX0

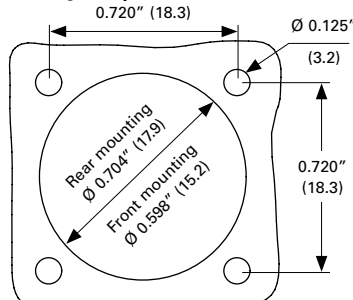

Jam nut receptacle - UTSX7

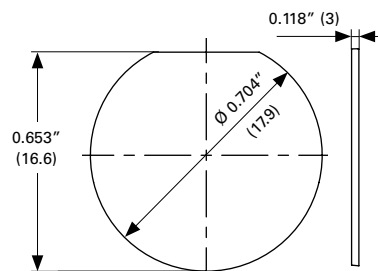

Dimensions in inches (millimeters)

Souriau UTSX series

103W3 (Shell size 10, 3x#20, 3x16)

Accessories

Jam nut and free hanging
receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Square flange sealing cap




Description	Part number
IP68 - Metal terminal	UTS10DCGE

Tooling

Tooling



Crimp tooling (without Shandles)



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Contact size	Contacts	Part number of head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
Standard contacts #20 Ø 0.039" (1.0)	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*
	RM/RC 24W3K ⁽¹⁾	S20RCM*
	RM/RC 20W3K ⁽¹⁾	S20RCM*
	RM/RC 18W3K ⁽¹⁾	S20RCM*
	SM/SC 24WL3 ⁽¹⁾⁽²⁾	S20SCM20*
	SM/SC 20WL3 ⁽¹⁾⁽²⁾	S20SCM20*

(1): Example of plating, for other plating options see [Page 126](#)

(2): Loose contact

* Heads to be used with handle PN: SHANGLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16

Fig. 1



Fig. 2



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contacts #16

		Cable acceptance		Cable acceptance	Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
PCB	Machined ⁽³⁾	—			RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—			RMP0F1000	RCP0F1000B	—	—	—	—

(1): Example of plating, for other plating see **Page 126**

(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): for dimensions see **Pages 133 or 134**

Contacts #20

		Cable acceptance	Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	26-24	0.005"-0.009"	0.13-0.25	RM24W3K	RC24W3K	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20W3K	RC20W3K	0.045"	1.15	0.070"	1.80
		20-18	0.020"-0.031"	0.52-0.80	RM18W3K	RC18W3K	0.051"	1.30	0.082"	2.10
	Stamped and formed reeled contacts See note ⁽¹⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24W3TK6 ⁽¹⁾	SC24W3TK6 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60
		26-24	0.005"-0.009"	0.13-0.25	SM24W3S26 ⁽¹⁾	SC24W3S25 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60
		22-20	0.012"-0.020"	0.32-0.52	SM20W3TK6 ⁽¹⁾	SC20W3TK6 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10
		22-20	0.012"-0.020"	0.32-0.52	SM20W3S26 ⁽¹⁾	SC20W3S25 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10


(1): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20W3TK6 becomes SM20WL3TK6

Electrical characteristics

UL	CSA	IEC
13A 500V with AWG 16*	7A 500V with AWG 16*	5A 32V 1.5kV 3 temperture elevation: 50°C
7.5A 250V with AWG20*	2.5A 250V with AWwG20*	

*qualification pending

UTSX 103W3 derating curves

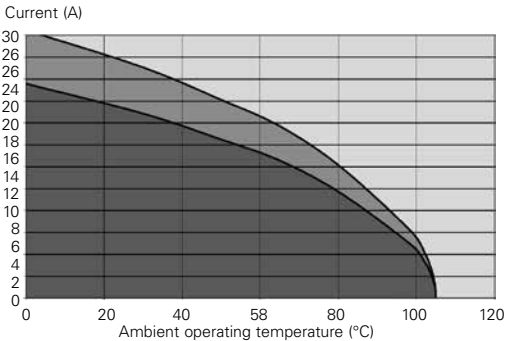

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

106 - 10E6/10D6 (Shell size 10, 6x#20)



Connector part number

UTSX 106



6 contacts 4.5A/250V per UL 1977 with AWG20 wire

10E6/10D6 6

contacts 6A/250V per UL 1977 with AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 60	Square flange receptacle	Without (Fig. 1)	UTSX0106P	UTSX0106S
		Cable gland (Fig. 2)	UTSX0JC106P	UTSX0JC106S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC106P	UTSX1JC106S
	Plug	Without (Fig. 4)	UTSX6106P	UTSX6106S
		Cable gland (Fig. 5)	UTSX6JC106P	UTSX6JC106S
	Jam nut receptacle	Without (Fig. 6)	UTSX7106P	UTSX7106S
PCB contacts supplied separately see Page 60	Jam nut receptacle	Without (Fig. 7)	UTSX7106P	UTSX7106S
Hand solder electrical contacts loaded	Square flange receptacle	Without (Fig. 1)	UTSX010E6P	UTSX010E6S
		Without (Fig. 4)	UTSX610E6P	UTSX610E6S
	Plug	Cable gland (Fig. 5)	UTSX6JC10E6P	UTSX6JC10E6S
		Without (Fig. 6)	UTSX710E6P	UTSX710E6S
PCB contacts supplied separately see Page 60	Jam nut receptacle	Without (Fig.7)	UTSX710E6P	UTSX710E6S
PCB contacts loaded see Page 60	Square flange receptacle	Without (Fig.1)	UTSX010D6P	UTSX010D6S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig.8)	UTSX710D6P	UTSX710D6S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig.8)	UTSX710D6P32	UTSX710D6S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

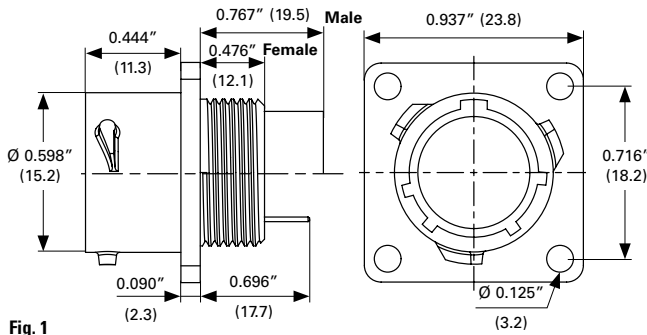


Fig. 1

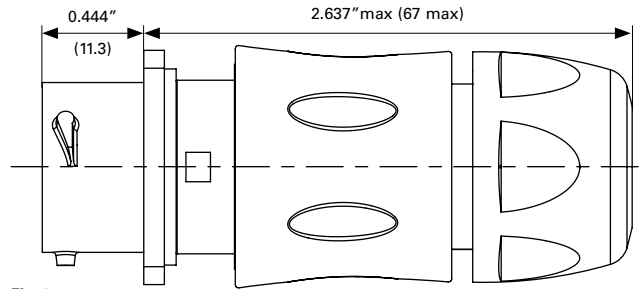


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Free hanging - UTSX1JC

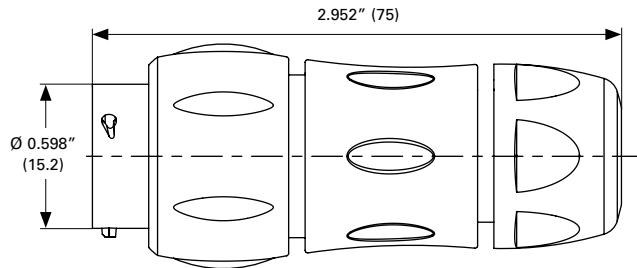


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Plug - UTSX6 and UTSX6JC

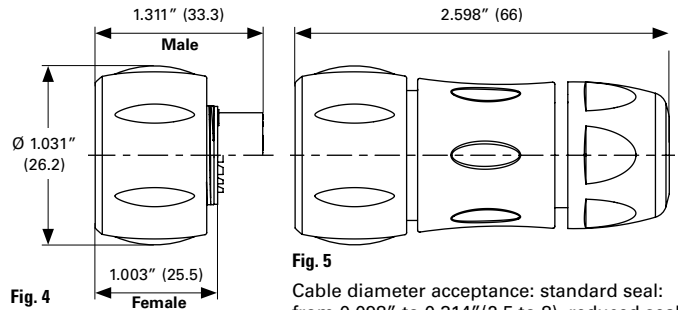


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7

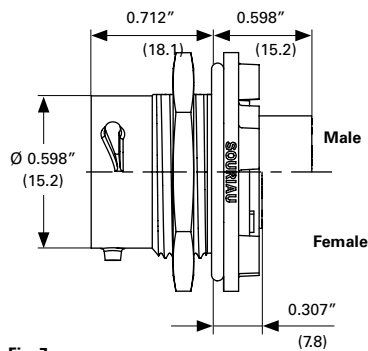


Fig. 7

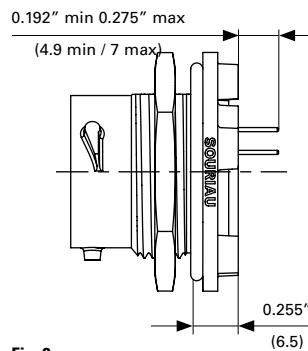


Fig. 8



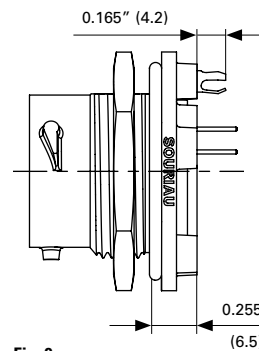


Fig. 9

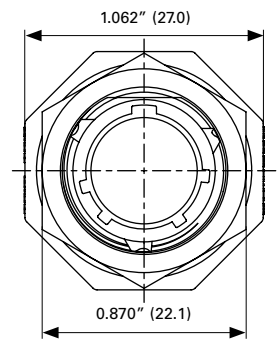


Panel cut out

Square flange receptacle - UTSX0

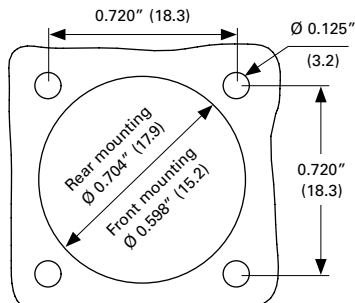

Jam nut receptacle - UTSX7

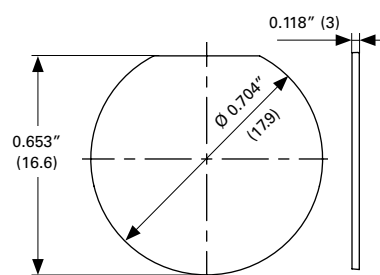

Dimensions in inches (millimeters)

Souriau UTSX series

106 - 10E6/10D6 (Shell size 10, 6x#20)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS10DCGE

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling
(without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #20 Ø 0.039" (1.0)	RM/RC 24W3K ⁽¹⁾	S20RCM*
	RM/RC 20W3K ⁽¹⁾	S20RCM*
	RM/RC 18W3K ⁽¹⁾	S20RCM*
	SM/SC 24WL3 ⁽¹⁾⁽²⁾	S20SCM20*
	SM/SC 20WL3 ⁽¹⁾⁽²⁾	S20SCM20*

(1): Example of plating, for other plating options see **Page 126**
(2): Loose contact
* Heads to be used with handle PN: SHANGLES

Extraction tool #20



Description	Part number
Contacts #20 Ø 0.039" (1.0)	RX20D44

Souriau UTSX series

106 - 10E6/10D6 (Shell size 10, 6x#20)

Contacts #20

Contact style	Contact type	Cable acceptance		Part number	Wire Ø max	Insulator Ø max	
		AWG	inch ² mm ²	Male	Female	inch	mm
Crimp contacts	Machined	26-24	0.005"-0.009" 0.13-0.25	RM24W3K	RC24W3K	0.031"	0.80
		22-20	0.012"-0.020" 0.32-0.52	RM20W3K	RC20W3K	0.045"	1.15
		20-18	0.020"-0.031" 0.52-0.80	RM18W3K	RC18W3K	0.051"	1.30
	Stamped and formed reeled contacts See note ⁽¹⁾ for loose piece	26-24	0.005"-0.009" 0.13-0.25	SM24W3TK6⁽²⁾	SC24W3TK6⁽¹⁾	—	—
		26-24	0.005"-0.009" 0.13-0.25	SM24W3S26⁽²⁾	SC24W3S25⁽¹⁾	—	—
		22-20	0.012"-0.020" 0.32-0.52	SM20W3TK6⁽²⁾	SC20W3TK6⁽¹⁾	—	—
		22-20	0.012"-0.020" 0.32-0.52	SM20W3S26⁽²⁾	SC20W3S25⁽¹⁾	—	—


(1): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20W3TK6 becomes SM20WL3TK6

Contact style	Contact type	Plating	Cable acceptance (AWG)	Wire stripping length	
				inch	mm
Handsold	Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 to 18	0.149"	3.8

Electrical characteristics

UL	CSA	IEC
UTSX 106 4.5A 250V with AWG20 wire	3A 250V with AWG20 wire	7A 32V 1.5kV 3
UTSX 10E6/10D6 6A 250V with AWG20 wire	6A 250V with AWG20 wire	7A 32V 1.5kV 3

UTSX 106 - 10E6/10D6 derating curves

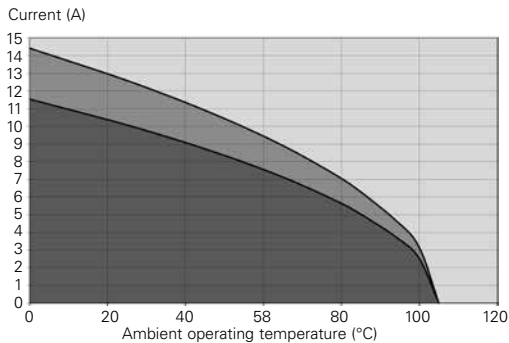

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 10E98/10D98



6 contacts 6A/250V
per UL 1977 with
AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 65	Square flange receptacle	Without (Fig. 1)	UTSX010E98P	UTSX010E98S
	Plug	Without (Fig. 5)	UTSX610E98P	UTSX610E98S
	Plug	Cable gland (Fig. 3)	UTSX6JC10E98P	UTSX6JC10E98S
	Jam nut receptacle	Without (Fig. 4)	UTSX710E98P	UTSX710E98S
PCB contacts loaded see Page 65	Square flange receptacle	Without (Fig. 2)	UTSX010D98P	UTSX010D98S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX710D98P	UTSX710D98S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX710D98P32	UTSX710D98S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers



Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

10E98/10D98 (Shell size 10, 6x#20)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0

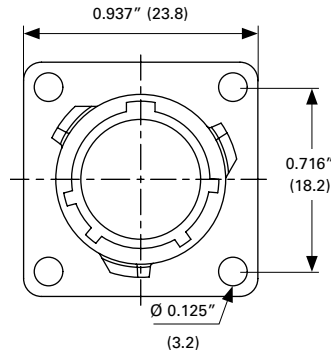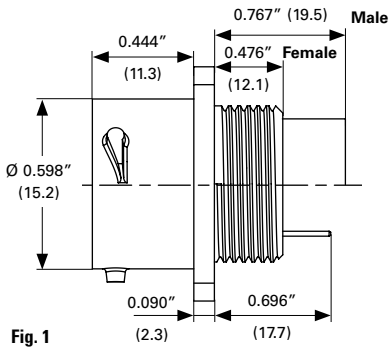

Plug - UTSX6 and UTSX6JC






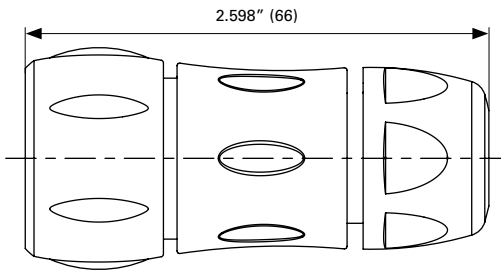


Fig. 3


Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7

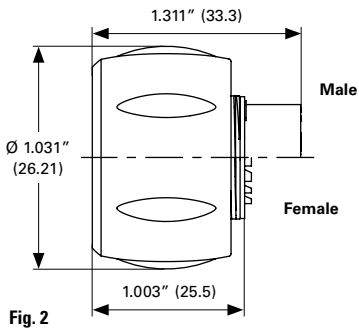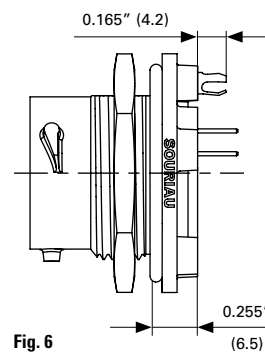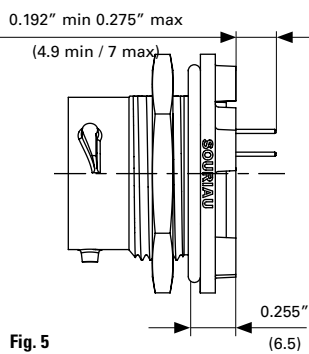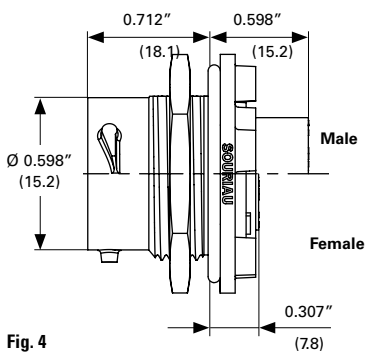


Panel cut out

Square flange receptacle - UTSX0

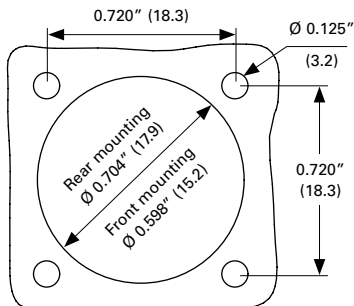

Jam nut receptacle - UTSX7

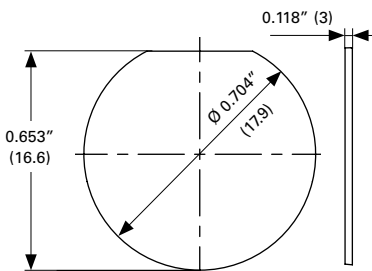

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS10DCGE

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR

Souriau UTSX series

10E98/10D98 (Shell size 10, 6x#20)

Contacts #20


Contact style	Contact type	Plating	Cable acceptance (AWG)	Wire stripping length	
				inch	mm
Handsoldier	Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 to 18	0.149"	3.8

Electrical characteristics

UL	CSA	IEC
6A 250V with AWG20 wire	6A 250V with AWG20 wire	7A 50V 1.5kV 3

Electrical information according to the IEC 61984, with pollution degree IV and overvoltage category III.

UTSX 10E98/10D98 derating curves

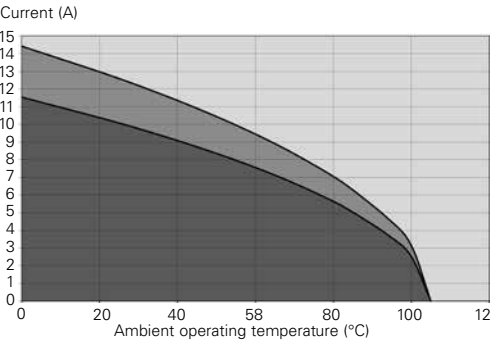

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 147



6 contacts + ground
10A/500V per UL 1977
with AWG16 wire

14E7/14D7

6 contacts + ground
12A/600V per UL 1977
with AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 70	Square flange receptacle	Without (Fig. 1)	UTSX0147P	UTSX0147S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC147P	UTSX0JC147S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC147P	UTSX1JC147S
	Free hanging receptacle	Cable gland and grommet (Fig. 3)	UTSX1GJC147P	–
	Plug	Without (Fig. 4)	UTSX6147P	UTSX6147S
	Plug	Cable gland (Fig. 5)	UTSX6JC147P	UTSX6JC147S
	Plug	Cable gland and grommet (Fig. 5)	–	UTSX6GJC147S
	Jam nut receptacle	Without (Fig. 6)	UTSX7147P	UTSX7147S
	Jam nut receptacle	Cable gland and grommet (Fig. 10)	UTSX7GJC147P	–
Screw contacts loaded	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC147PSCR	UTSX1JC147SSCR
	Plug	Cable gland (Fig. 5)	UTSX6JC147PSCR	UTSX6JC147SSCR
	Jam nut receptacle	Without (Fig. 9)	UTSX7147PSCR	UTSX7147SSCR
PCB contacts supplied separately see Page 70	Jam nut receptacle	Without (Fig. 1)	UTSX7147PSEK9	–
Handsolder electrical contacts loaded see Page 70	Square flange receptacle	Without (Fig. 1)	UTSX014E7P	UTSX014E7S
	Plug	Without (Fig. 4)	UTSX614E7P	UTSX614E7S
	Plug	Cable gland (Fig. 5)	UTSX6JC14E7P	UTSX6JC14E7S
	Jam nut receptacle	Without (Fig. 6)	UTSX714E7P	UTSX714E7S
PCB contacts loaded	Square flange receptacle	Without (Fig. 3)	UTSX014D7P	UTSX014D7S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 7)	UTSX714D7P	UTSX714D7S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 8)	UTSX714D7P32	UTSX714D7S32

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

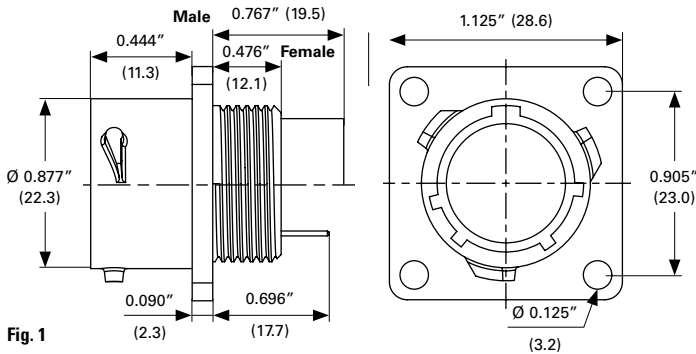


Fig. 1

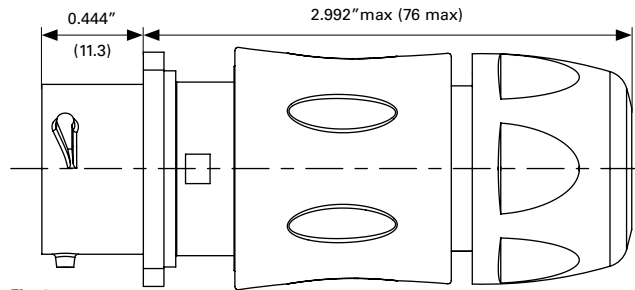


Fig. 2

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC and UTSXGJC

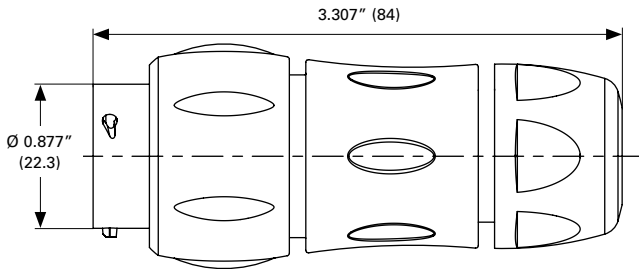


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6, UTSX6JC and UTSX6GJC

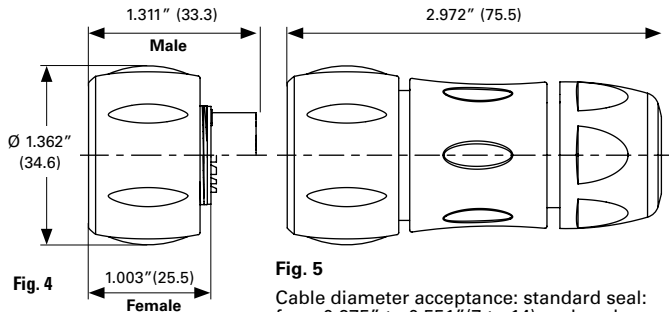


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

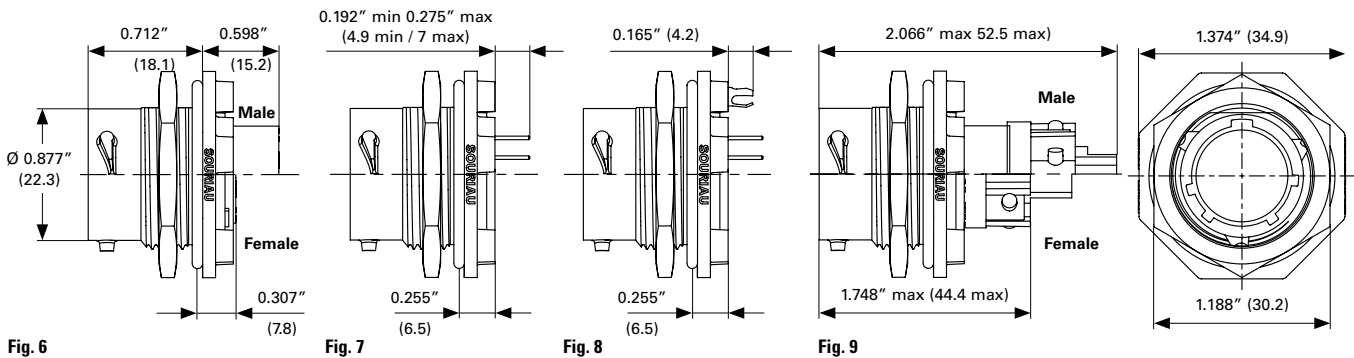


Fig. 6

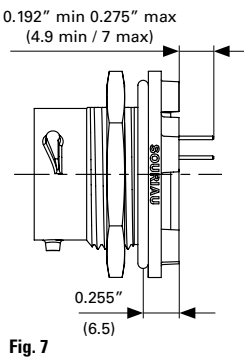


Fig. 7

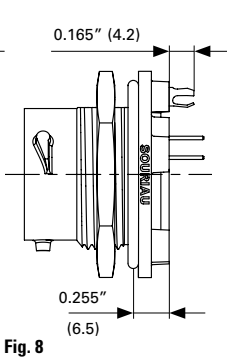


Fig. 8

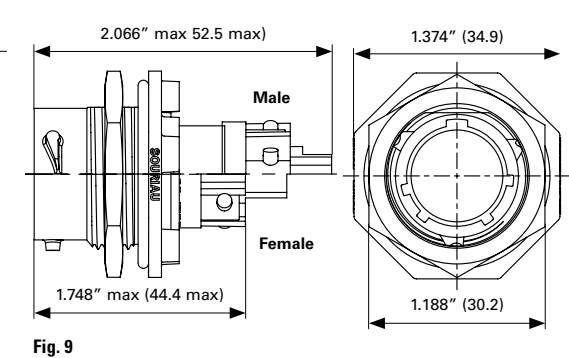


Fig. 9

Jam nut receptacle UTSX7GJC



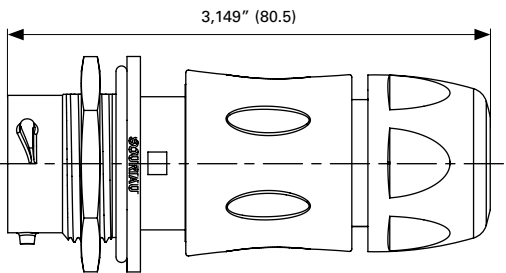


Fig. 10

Panel cut out



Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Souriau UTSX series

147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)



Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see Page 126
* Heads to be used with handle PN: SHANGLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contacts #16

		Cable acceptance	Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
	14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20	
PCB	Machined ⁽³⁾	—			RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—			RMP0F1000	RCPOF1000B	—	—	—	—
Handsold	Loaded in the connector	14-18	0.098"-0.031"	2.48-0.80	—	—	—	—	—	—

(1): Example of plating, for other plating see Page 126


(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): For dimensions see Page 133

Electrical characteristics

UL	CSA	IEC
UTSX 147 10A 500V with AWG16 wire	7A 500V with AWG16 wire	7A 150V 1.5kV 3
UTSX 14E7/14D7 12A 600V with AWG16 wire	12A 600V with AWG16 wire	7A 150V 1.5kV 3

UTSX 147 - 14E7/14D7 derating curves

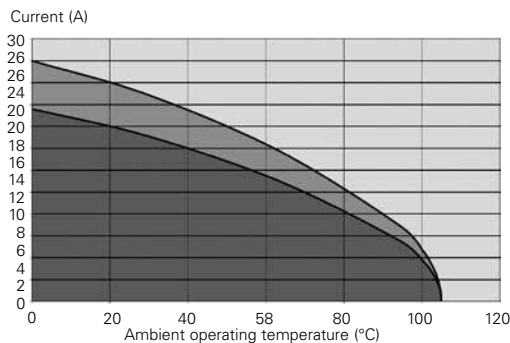

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

10E7/10D7 (Shell size 10, 7x#20)



Connector part number

UTSX 10E7/10D7



7 contacts 6A/250V
per UL 1977
with AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 73	Square flange receptacle	Without (Fig. 1)	UTSX010E7P	UTSX010E7S
	Plug	Without (Fig. 5)	UTSX610E7P	UTSX610E7S
	Plug	Cable gland (Fig. 3)	UTSX6JC10E7P	UTSX6JC10E7S
	Jam nut receptacle	Without (Fig. 4)	UTSX710E7P	UTSX710E7S
PCB contacts loaded see Page 73	Square flange receptacle	Without (Fig. 2)	UTSX010D7P	UTSX010D7S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX710D7P	UTSX710D7S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX710D7P32	UTSX710D7S32

For discrimination/keying methods see **Page 151**



Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0

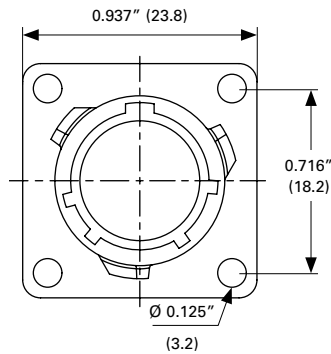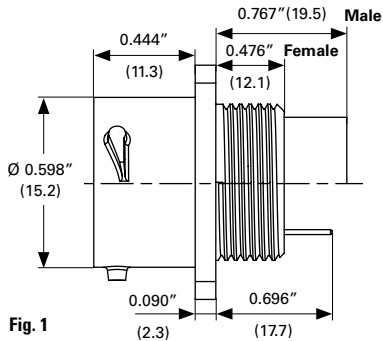

Plug - UTSX6 and UTSX6JC






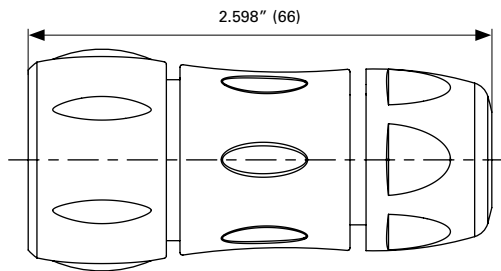


Fig. 3


Cable diameter acceptance: standard seal: from 0.098" to 0.314" (2.5 to 8), reduced seal: from 0.059" to 0.196" (1.5 to 5)

Jam nut receptacle UTSX7

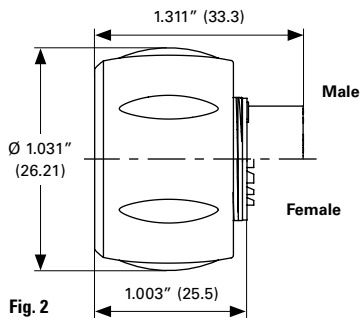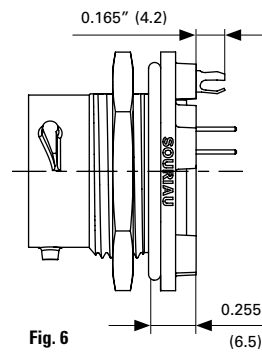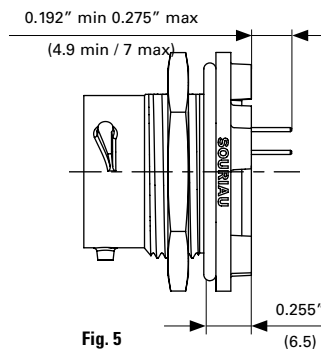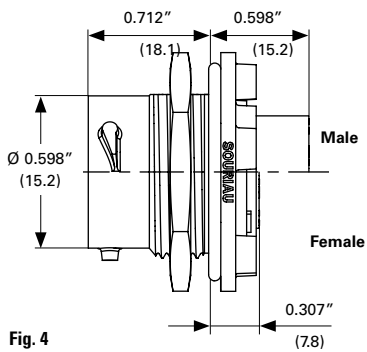


Panel cut out

Square flange receptacle - UTSX0

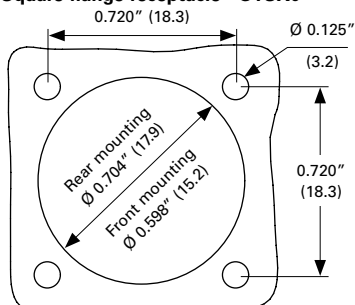

Jam nut receptacle - UTSX7

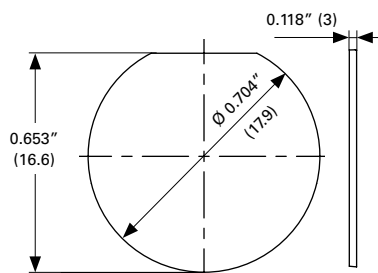

Dimensions in inches (millimeters)

Souriau UTSX series

10E7/10D7 (Shell size 10, 7x#20)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS10DCG
IP68 - Metal terminal	UTS10DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS10DCGE

Plug sealing cap



Description	Part number
IP68	UTX610DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005586A	85005595

Gasket



Part number
UTFD12B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS710CCRG	UTS610CCRG
Y for Yellow	UTS710CCRY	UTS610CCRY
R for Red	UTS710CCRR	UTS610CCRR


Contacts #20

Contact style	Contact type	Plating	Cable acceptance (AWG)	Wire stripping length	
				inch	mm
Handsolder	Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 to 18	0.149"	3.8

Electrical characteristics

UL	CSA	IEC
6A 250V with AWG20 wire	6A 250V with AWG20 wire	7A 50V 1.5kV 3

UTSX 10E7/10D7 derating curves

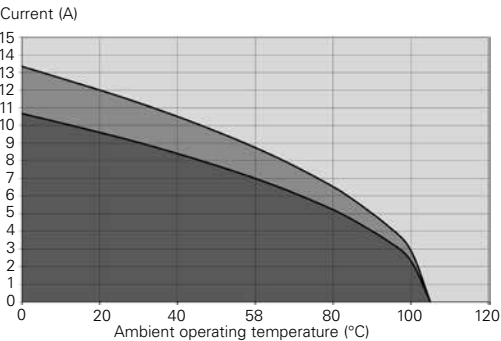

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.


Souriau UTSX series

128 (Shell size 12, 8x16)



Connector part number

UTSX 128



6 contacts
10A/500V per
UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 78	Square flange receptacle	Without (Fig. 1)	UTSX0128P	UTSX0128S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC128P	UTSX0JC128S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC128P	UTSX1JC128S
	Free hanging receptacle	Cable gland and grommet (Fig. 3)	UTSX1GJC128P	—
	Plug	Without (Fig. 4)	UTSX6128P	UTSX6128S
	Plug	Cable gland (Fig. 5)	UTSX6JC128P	UTSX6JC128S
	Plug	Cable gland and grommet (Fig. 5)	—	UTSX6GJC128S
	Jam nut receptacle	Without (Fig. 6)	UTSX7128P	UTSX7128S
	Jam nut receptacle	Cable gland and grommet (Fig. 8)	UTSX7GJC128P	—
PCB contacts supplied separately see Page 78	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 7)	UTSX7128P	UTSX7128S
PCB contacts loaded see Page 78	Jam nut receptacle with stand off and hold down clip	Without (Fig. 7)	UTSX7128PSEK9	—

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

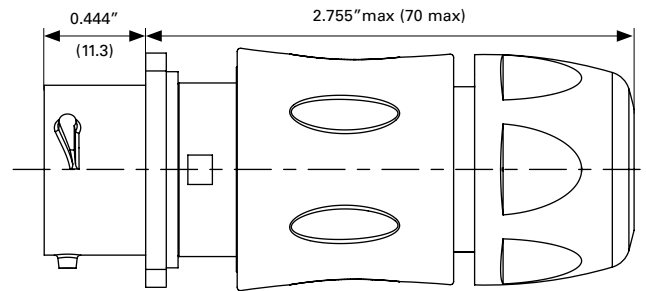
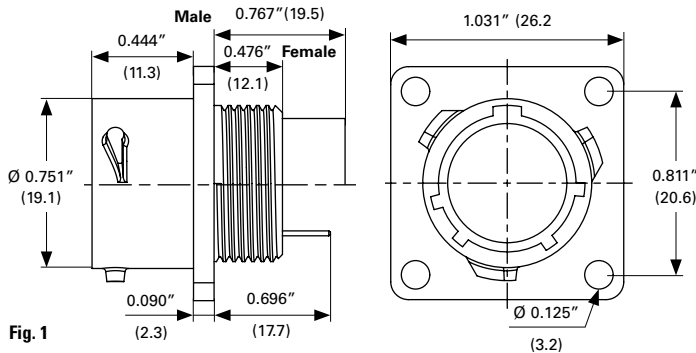


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Free hanging - UTSX1JC and UTSX1GJC

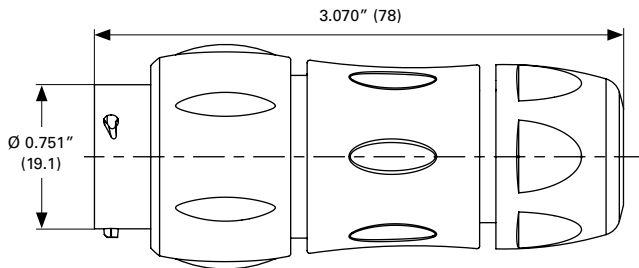


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Plug - UTSX6, UTSX6JC and UTSX6GJC

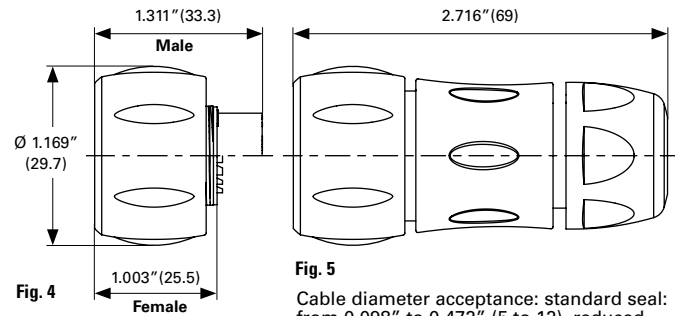


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7 and UTSX7GJC

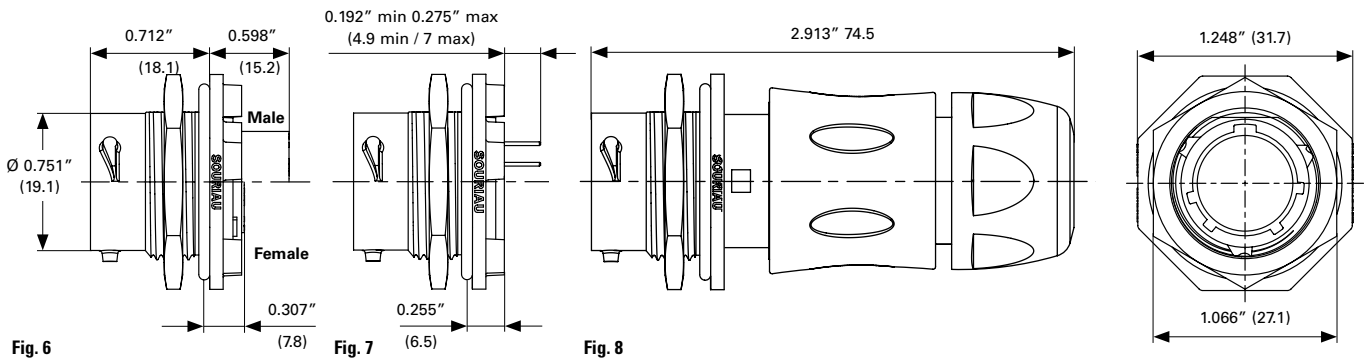



Fig. 6

Fig. 7


Fig. 8

Panel cut out

Square flange receptacle - UTSX0

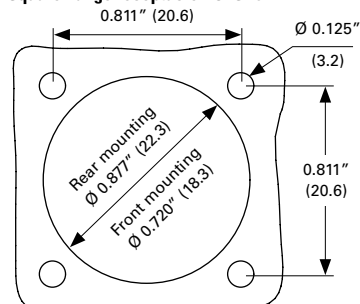

Jam nut receptacle - UTSX7

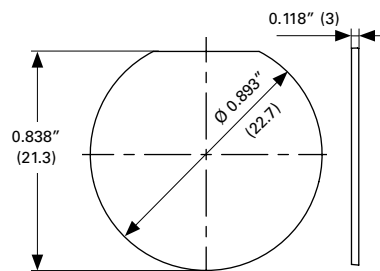

Dimensions in inches (millimeters)

Souriau UTSX series

128 (Shell size 12, 8x16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Gasket



Part number
UTFD13B



Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling
(without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see Page 126
* Heads to be used with handle PN: SHANDLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16

Fig. 1



Fig. 2



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Souriau UTSX series

128 (Shell size 12, 8x16)

Contacts #16

Contact style	Contact type	Cable acceptance AWG	Cable acceptance		Part number		Wire Ø max inch		Insulator Ø max	
			inch ²	mm ²	Male	Female	mm		inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
PCB	Machined ⁽³⁾	—	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yox090	RCDXK1D28 + yox090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—	—	—	RMPOF1000	RCPOF1000B	—	—	—	—
Handsold	Loaded in the connector	14-18	0.098"-0.031"	2.48-0.80	—	—	—	—	—	—

(1): Example of plating, for other plating see **Page 126**


(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): For dimensions see **Page 133**

Electrical characteristics

UL	CSA	IEC
10A 500V with AWG16 wire	7A 500V with AWG16 wire	10A 80V 1.5kV 3

UTSX 128 derating curves

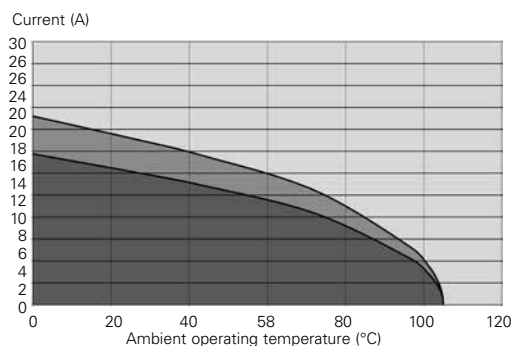

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 12E8/12D8



8 contacts
4.5A/250V per
UL 1977 with
AWG20 wire

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Handsolder electrical contacts loaded see Page 82	Square flange receptacle	Without (Fig. 1)	UTSX012E8P	UTSX012E8S
	Plug	Without (Fig. 2)	UTSX612E8P	UTSX612E8S
	Plug	Cable gland (Fig. 3)	UTSX6JC12E8P	UTSX6JC12E8S
	Jam nut receptacle	Without (Fig. 4)	UTSX712E8P	UTSX712E8S
PCB contacts loaded see Page 82	Square flange receptacle	Without (Fig. 1)	UTSX012D8P	UTSX012D8S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX712D8P	UTSX712D8S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX712D8P32	UTSX712D8S32

For discrimination/keying methods see **Page 151**

Sealed unmated 

Overmolded cable assembly part numbers


Please contact us directly for overmolded cable assemblies.

Souriau UTSX series


12E8/12D8 (Shell size 12, 8x20)

Dimensions (For mated connector lengths see Page 143)


Square flange receptacle - UTSX0

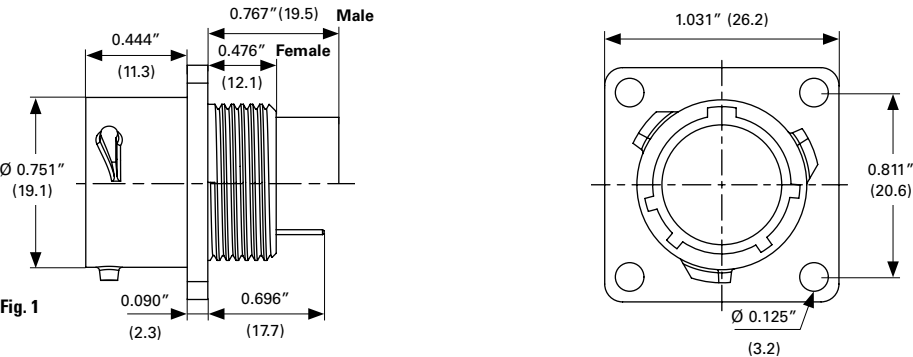

Plug - UTSX6 and UTSX6JC

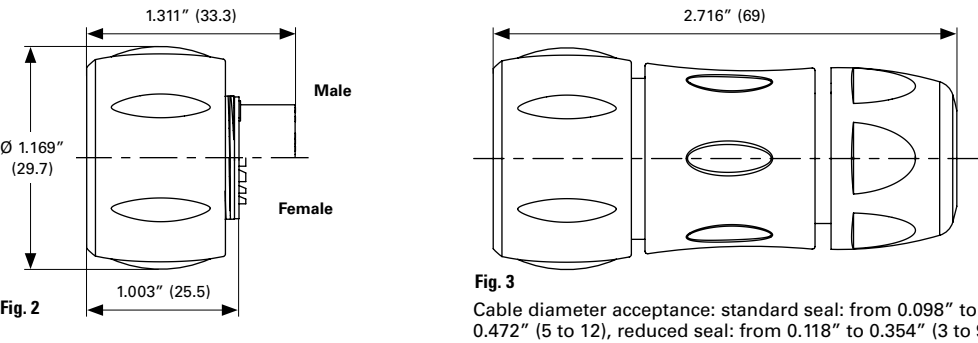


Jam nut receptacle UTSX7

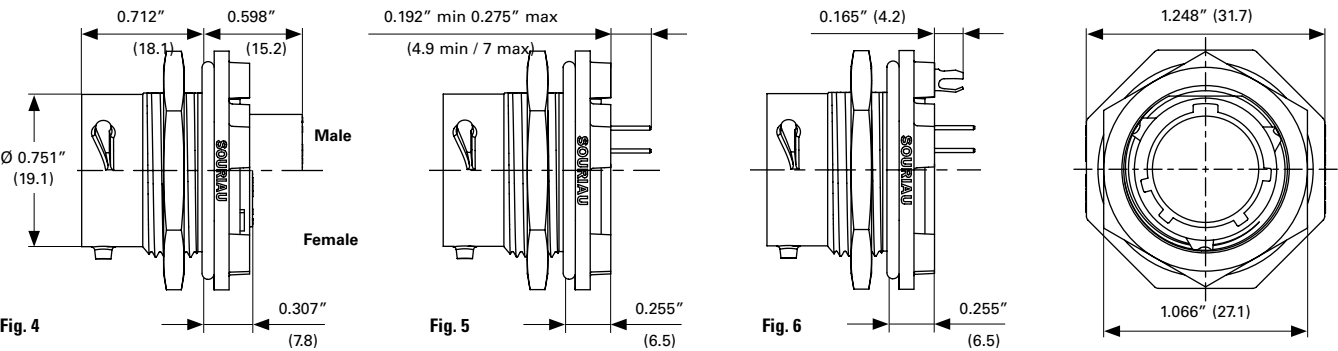


Panel cut out

Square flange receptacle - UTSX0

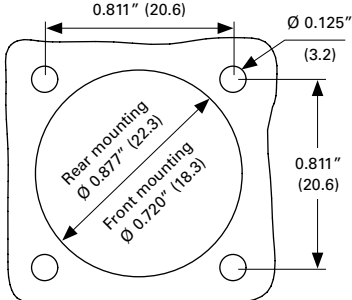

Jam nut receptacle - UTSX7

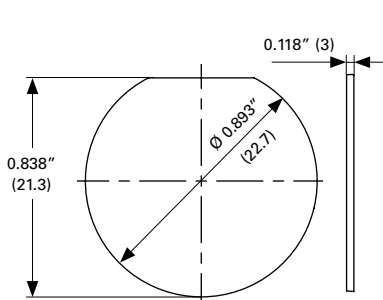

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Souriau UTSX series

12E8/12D8 (Shell size 12, 8x20)

Contacts #20


Contact type	Plating	Cable acceptance (AWG)	Cable acceptance		Wire stripping length	
			inch ²	mm ²	inch	mm
Handsolder Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20-18	0.020"-0.031"	0.32-0.80	0.149"	3.8
PCB Machined ⁽¹⁾	Min 0.4µ gold over 0.8µ Ni	—	—	—	—	—

(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
4.5A 250V with AWG20 wire	4.5A 250V with AWG20 wire	6A 32V 1.5kV 3

UTSX 12E8/12D8 derating curves

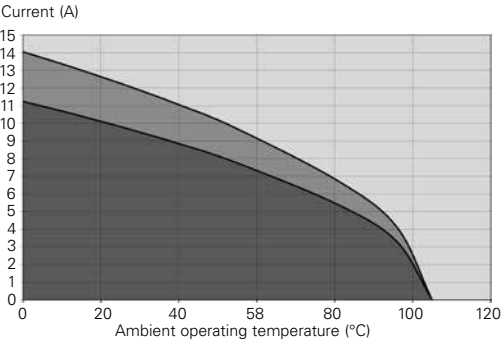

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 148



8 contacts 25A 600V
per UL1977 with
AWG14 wire 5A
600V per UL1977
AWG20 wire
(qualification pending)

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see Page 87	Square flange receptacle	Without (Fig. 1)	UTSX0148P	UTSX0148S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC148P	UTSX0JC148S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC148P	UTSX1JC148S
	Plug	Without (Fig. 4)	UTSX6148P	UTSX6148S
	Plug	Cable gland (Fig. 5)	UTSX6JC148P	UTSX6JC148S
	Jam nut receptacle	Without (Fig. 6)	UTSX7148P	UTSX7148S

Souriau UTSX series

148 (Shell size 14, 4x#16, 4x#12)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

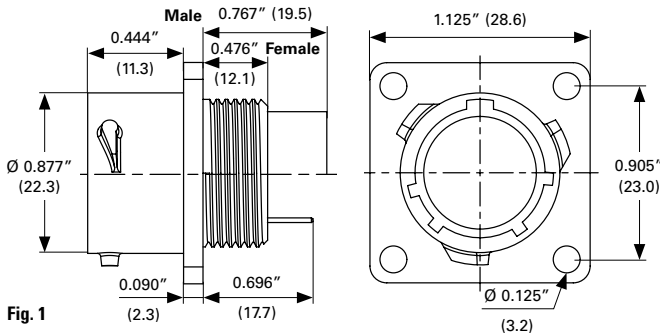


Fig. 1

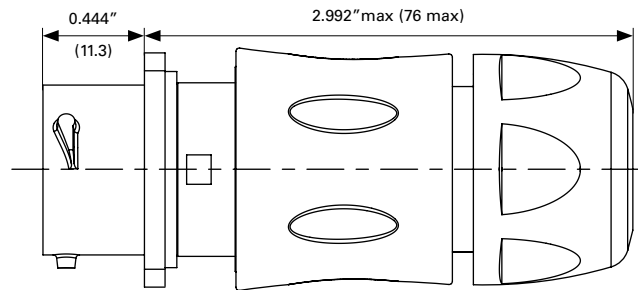


Fig. 2

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC

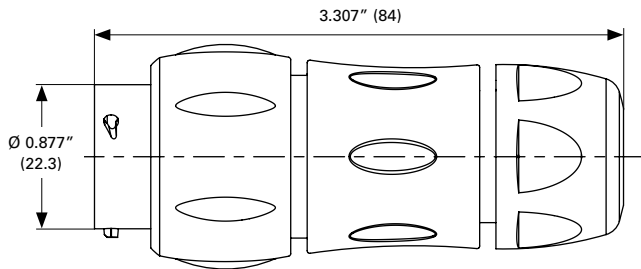


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6 and UTSX6JC

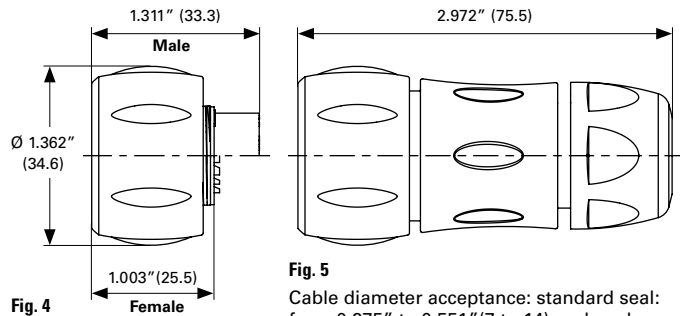


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7



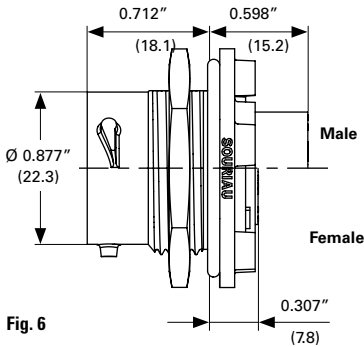


Fig. 6




Panel cut out

Square flange receptacle - UTSX0

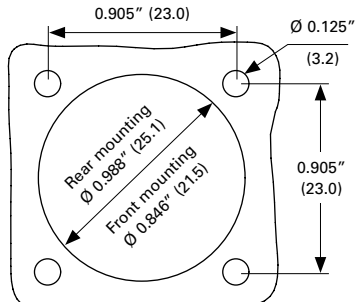

Jam nut receptacle - UTSX7

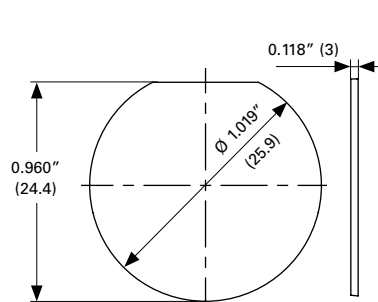

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Souriau UTSX series



148 (Shell size 14, 4x#16, 4x#12)

Tooling

#16 machined or stamped contacts



Crimp tooling (without Shandles)



Extraction tool #16



Crimp tooling #12



#16, #12 and #8 machined contacts



Extraction tool #20



Dimensions in inches (millimeters)

Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see Page 126
* Heads to be used with handle PN: SHANDLES

Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contact size	Part number hand tool	Part number positioner + locator setting
Standard contacts #12 Ø 0.094" (2.4)	M317	VEGE10077A

Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Description	Part number
Contacts #12 Ø 0.094" (2.4)	51060210924

Contacts #16

		Cable acceptance	Cable acceptance		Part number		Wire Ø max	Insulator Ø max		
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
	Machined	26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
	Machined	20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
	Machined	16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
		26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
PCB	Machined ⁽³⁾	—	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—	—	—

1): Example of plating, for other plating see Page 126

(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

Contacts #12

Contact style	Contact type	Cable acceptance		Part number		Wire Ø max inch		Insulator Ø max		
		AWG	inch²	mm²	Male	Female	mm	inch	mm	
Crimp contacts	Machined	20	—	—	82911457NA ⁽¹⁾	82911456A ⁽¹⁾	0.027"	0.7	0.192"	4.90
		20	—	—	82911459NA ⁽¹⁾	82911458A ⁽¹⁾	0.044"	1.12	0.192"	4.90
		18	—	—	82911461NA ⁽¹⁾	82911460A ⁽¹⁾	0.055"	1.42	0.192"	4.90
		16	—	—	82911463NA ^v	82911462A ⁽¹⁾	0.067"	1.72	0.192"	4.90
		14	—	—	82911465NA ⁽¹⁾	82911464A ⁽¹⁾	0.087"	2.20	0.192"	4.90
		12	—	—	82911467NA ⁽¹⁾	82911466A ⁽¹⁾	0.111"	2.82	0.192"	4.90

(1): Example of plating, for other plating see Page 126

Souriau UTSX series


148 (Shell size 14, 4x#16, 4x#12)

Electrical characteristics

UL	CSA	IEC
25A 600V with AWG14*	17A 600V with AWG14*	17A 230V 1.5kV 3
5A 600V with AWG20*	5A 600V with AWG20*	

* qualification pending

UTSX 148 derating curves

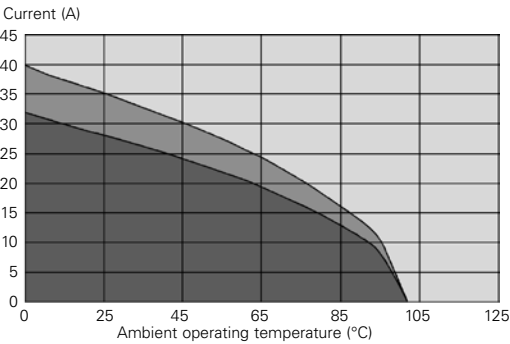

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 1210 - 12E10/12D10



10 contacts
4.5A/250V
per UL 1977
with AWG20 wire

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see Page 93	Square flange receptacle	Without (Fig. 1)	UTSX01210P	UTSX01210S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC1210P	UTSX0JC1210S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC1210P	UTSX1JC1210S
	Plug	Without (Fig. 4)	UTSX61210P	UTSX61210S
	Plug	Cable gland (Fig. 5)	UTSX6JC1210P	UTSX6JC1210S
	Jam nut receptacle	Without (Fig. 6)	UTSX71210P	UTSX71210S
Handsolder electrical contacts loaded see Page 93	Square flange receptacle	Without (Fig. 1)	UTSX012E10P	UTSX012E10S
	Plug	Without (Fig. 4)	UTSX612E10P	UTSX612E10S
	Plug	Cable gland (Fig. 5)	UTSX6JC12E10P	UTSX6JC12E10S
	Jam nut receptacle	Without (Fig. 6)	UTSX712E10P	UTSX712E10S
PCB contacts loaded	Square flange receptacle	Without (Fig. 3)	UTSX012D10P	UTSX012D10S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig.7)	UTSX712D10P	UTSX712D10S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 8)	UTSX712D10P32	UTSX712D10S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers
Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

1210 - 12E10/12D10 (Shell size 12, 10x#20)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

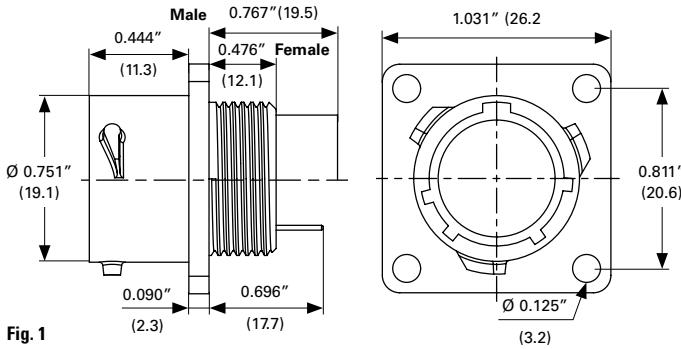


Fig. 1

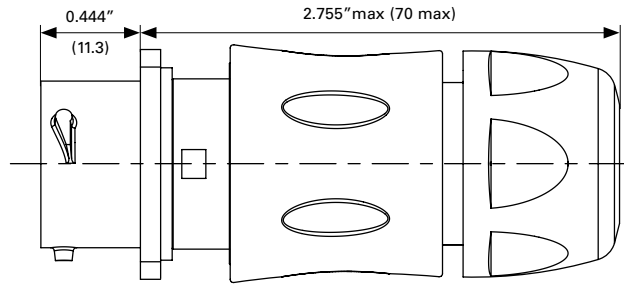


Fig. 2

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Free hanging - UTSX1JC

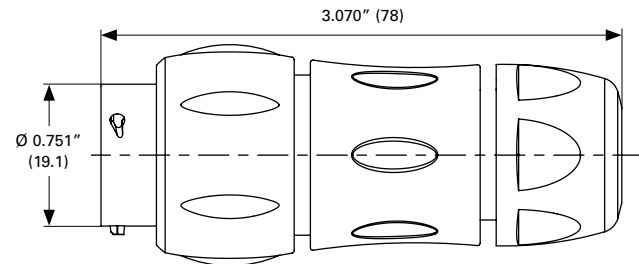


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Plug - UTSX6 and UTSX6JC

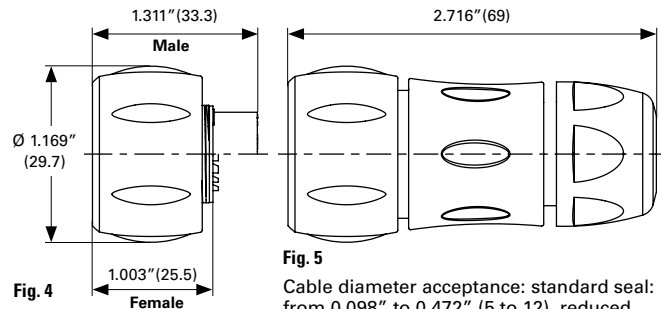


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7

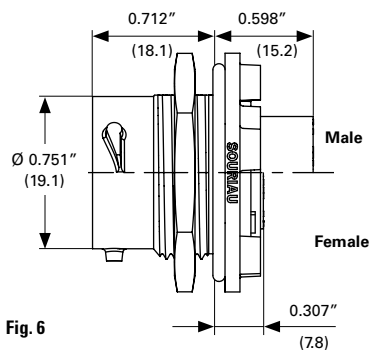


Fig. 6

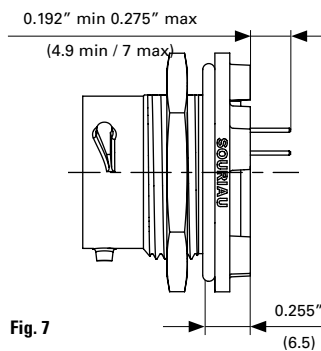


Fig. 7



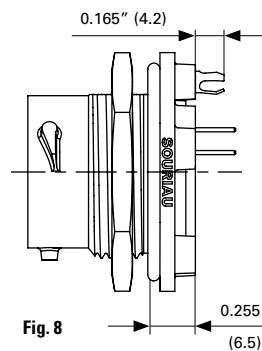


Fig. 8




Panel cut out

Square flange receptacle - UTSX0

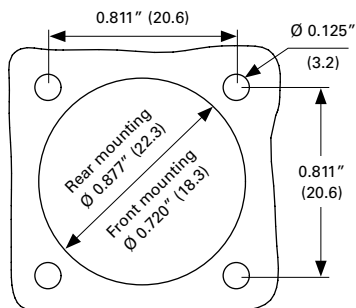

Jam nut receptacle - UTSX7

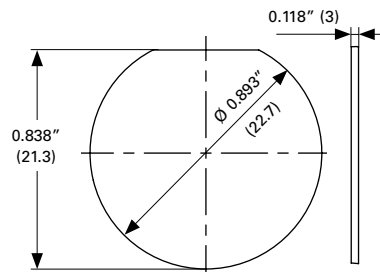

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Souriau UTSX series

1210 - 12E10/12D10 (Shell size 12, 10x#20)

Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #20 Ø 0.039" (1)	RM/RC 24W3K ⁽¹⁾	S20RCM*
	RM/RC 20W3K ⁽¹⁾	S20RCM*
	RM/RC 18W3K ⁽¹⁾	S20RCM*
	SM/SC 24WL3 ⁽¹⁾⁽²⁾	S20SCM20*
	SM/SC 20WL3 ⁽¹⁾⁽²⁾	S20SCM20*

(1): Example of plating, for other plating options see **Page 126**

(2): Loose contact

* Heads to be used with handle PN: SHANDLES

Extraction tool #20



Description	Part number
Contacts #20 Ø 0.039" (1)	RX20D44

Contacts #20

Contact style	Contact type	Cable acceptance		Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
		AWG	inch²	mm²	Male	Female	inch	mm	inch	mm	
Crimp contacts	Machined	26-24	0.005"-0.009"	0.13-0.25	RM24W3K	RC24W3K	0.031"	0.80	0.062"	1.58	
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20W3K	RC20W3K	0.045"	1.15	0.070"	1.80	
	Machined	20-18	0.020"-0.031"	0.52-0.80	RM18W3K	RC18W3K	0.051"	1.30	0.082"	2.10	
	Stamped and formed reeled contacts See note ⁽¹⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24W3TK6 ⁽¹⁾	SC24W3TK6 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60	
		26-24	0.005"-0.009"	0.13-0.25	SM24W3S26 ⁽¹⁾	SC24W3S25 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60	
		22-20	0.012"-0.020"	0.32-0.52	SM20W3TK6 ⁽¹⁾	SC20W3TK6 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10	
		22-20	0.012"-0.020"	0.32-0.52	SM20W3S26 ⁽¹⁾	SC20W3S25 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10	
PCB	Machined ⁽²⁾	—	—	—	RMW5016K	RCW5016K	—	—	—	—	

(1): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20W3TK6 becomes SM20WL3TK6


(2): for dimensions see **Pages 133 or 134**

Contact style	Contact type	Plating	Cable acceptance (AWG)	Wire stripping length	
				inch	mm
Handsolder	Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 to 18	0.149"	3.8

Electrical characteristics

UL	CSA	IEC
UTSX 1210		
4.5A 250V with AWG20 wire	3A 250V with AWG20 wire	6A 50V 1.5kV 3
UTSX 12E10/12D10		
4.5A 250V with AWG20 wire	4.5A 250V with AWG20 wire	6A 50V 1.5kV 3

UTSX 1210 - 12E10/12D10 derating curves

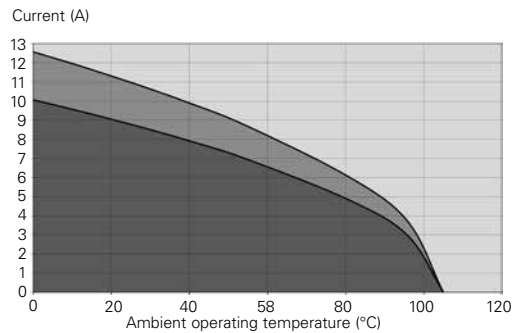

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.


Souriau UTSX series

1412 (Shell size 14, 12x#16)



Connector part number

UTSX 1412



12 contacts
16A/500V
per UL 1977 with
AWG14 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately See Page 98	Square flange receptacle	Without (Fig. 1)	UTSX01412P	UTSX01412S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC1412P	UTSX0JC1412S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC1412P	UTSX1JC1412S
	Free hanging receptacle	Cable gland and grommet (Fig. 3)	UTSX1GJC1412P	–
	Plug	Without (Fig. 4)	UTSX61412P	UTSX61412S
	Plug	Cable gland (Fig. 5)	UTSX6JC1412P	UTSX6JC1412S
	Plug	Cable gland and grommet (Fig. 5)	–	UTSX6GJC1412S
PCB contacts supplied separately See Page 98	Jam nut receptacle	Without (Fig. 6)	UTSX71412P	UTSX71412S
	Jam nut receptacle	Cable gland and grommet (Fig. 7)	UTSX7GJC1412P	–
	Square flange receptacle	Without (Fig. 1)	UTSX01412P	UTSX01412S
	Jam nut receptacle	Without (Fig. 6)	UTSX71412P	UTSX71412S

For discrimination/keying methods see **Page 151**

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see page 143)

Square flange receptacle - UTSX0 and UTSX0JC

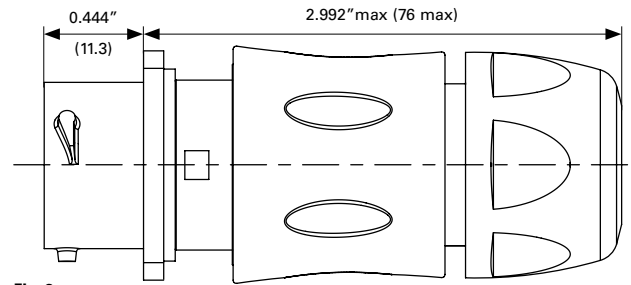
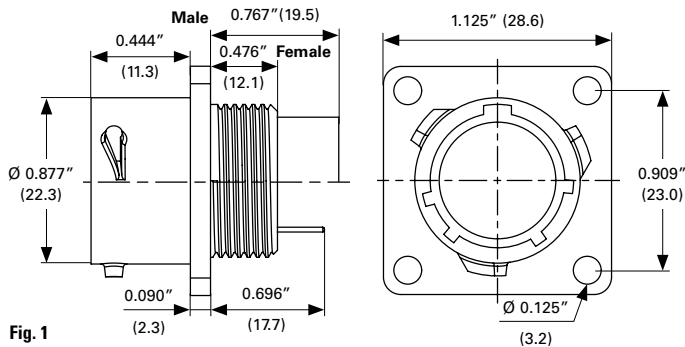


Fig. 2
Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC and UTSC1GJC

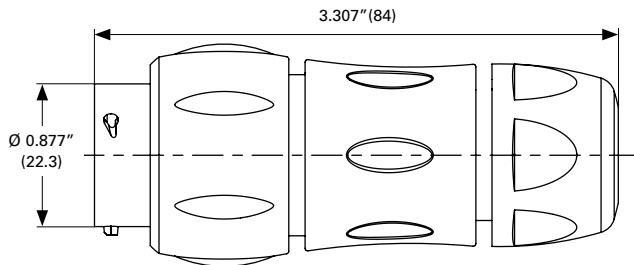


Fig. 3
Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6, UTSX6JC and UTSX6GJC

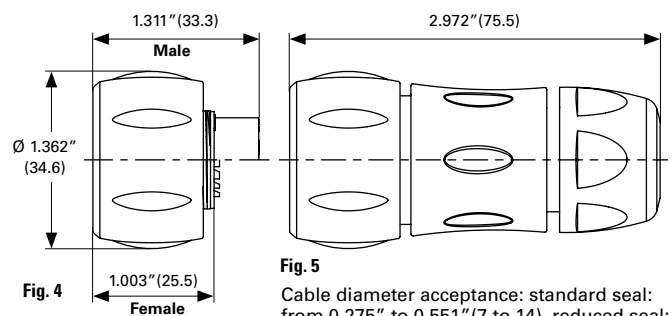


Fig. 5
Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7 and UTSX7GJC




Fig. 6



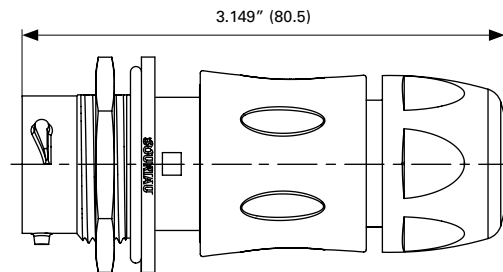


Fig. 7




Panel cut out

Square flange receptacle - UTSX0

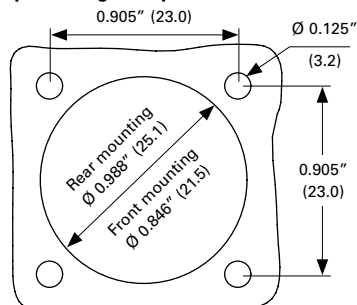

Jam nut receptacle - UTSX7

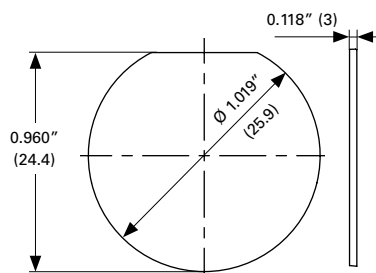

Dimensions in inches (millimeters)

Souriau UTSX series

1412 (Shell size 14, 12x#16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see Page 126
* Heads to be used with handle PN: SHANGLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16

Fig. 1



Fig. 2



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Souriau UTSX series

1412 (Shell size 14, 12x#16)

Contacts #16

		Cable acceptance	Cable acceptance		Part number		Wire Ø max		Insulator Ø max	
Contact style	Contact type	AWG	inch²	mm²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55	0.039"	1.00
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15	0.070"	1.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15	0.086"	2.20
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80	0.125"	3.20
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30	0.125"	3.20
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—	0.035"-0.062"	0.90-1.58
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—	0.047"-0.082"	1.20-2.10
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—	0.118"	3.00
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—	0.125"	3.20
PCB	Machined ⁽³⁾	—	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132	—	—	RMDXK10D28	RCDXK1D28	—	—	—	—
	Cable monocrimp	see Pages 130 to 132	—	—	RMDX60xxD28	RCDX60xxD28	—	—	—	—
	Twisted pair multipiece	see Pages 130 to 132	—	—	RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—	—	—
	Twisted pair monocrimp	see Pages 130 to 132	—	—	RMDX60xxD28	RCDX60xxD28	—	—	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—	—	—	RMPOF1000	RCPOF1000B	—	—	—	—
Handsolder	Loaded in the connector	14-18	0.098"-0.031"	2.48-0.80	—	—	—	—	—	—

(1): Example of plating, for other plating see **Page 126**


(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): for dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
16A 500V with AWG14 wire	16A 500V with AWG14 wire	10A 63V 1.5kV 3

UTSX 1412 derating curves

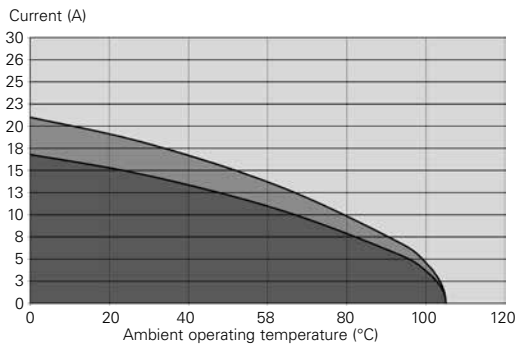

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 14E12/14D12



12 contacts 5A
250V per UL1977
with AWG20
wire 10A 600V
per UL1977 with
AWG16 wire
(qualification
pending)

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 102	Square flange receptacle	Without (Fig. 1)	UTSX014E12P	UTSX014E12S
	Plug	Without (Fig. 2)	UTSX614E12P	UTSX614E12S
	Plug	Cable gland (Fig. 3)	UTSX6JC14E12P	UTSX6JC14E12S
	Jam nut receptacle	Without (Fig. 4)	UTSX714E12P	UTSX714E12S
PCB contacts loaded see Page 102	Square flange receptacle	Without (Fig. 2)	UTSX014D12P	UTSX014D12S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX714D12P	UTSX714D12S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX714D12P32	UTSX714D12S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers



Please contact us directly for overmolded cable assemblies.

Souriau UTSX series

14E12/14D12 (Shell size 14, 8x#20, 4#16)

Dimensions (For mated connector lengths see page 143)

Square flange receptacle - UTSX0

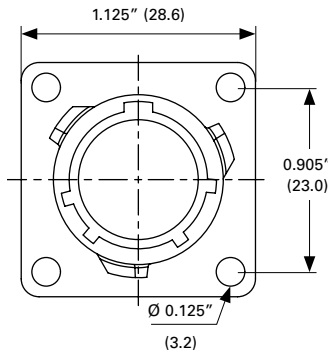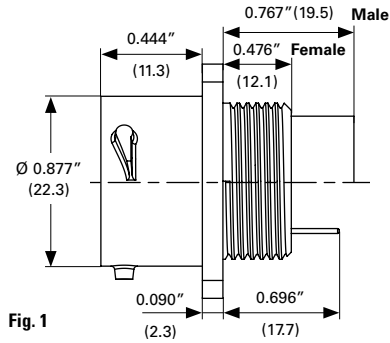

Plug - UTSX6 and UTSX6JC

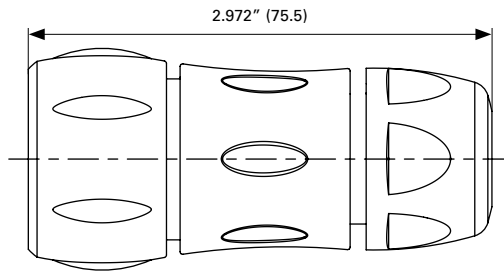
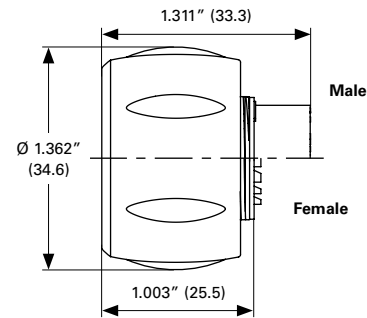


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

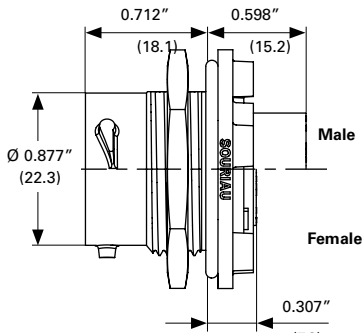


Fig. 4




Fig. 5






Fig. 6




Panel cut out

Square flange receptacle - UTSX0

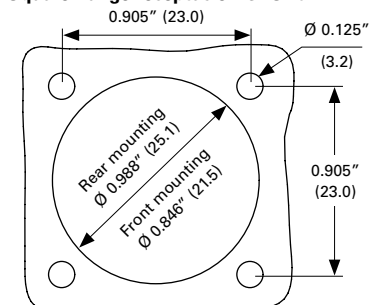

Jam nut receptacle - UTSX7

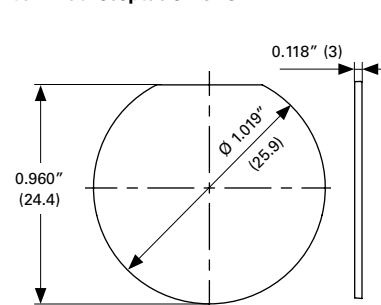

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Souriau UTSX series

14E12/14D12 (Shell size 14, 8x#20, 4#16)

Contacts

Contact size	Contact type	Plating	Cable acceptance (AWG)	Cable acceptance		Wire stripping length	
				inch²	mm²	inch	mm
#16	Handsolder Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	18 - 14	0.032"-0.081"	0.823 - 2.08	0.196"	5
	PCB Machined ⁽¹⁾	Min 0.4µ gold over 0.8µ Ni	—	—	—	—	—
#20	Handsolder Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 - 18	0.012"-0.029"	0.32 - 0.75	0.149"	3.8
	PCB Machined ⁽¹⁾	Min 0.4µ gold over 0.8µ Ni	—	—	—	—	—

(1): For dimensions see **Pages 133 or 134**


Electrical characteristics

UL	CSA	IEC
5A 250V with AWG20* 10A 600V with AWG16*	5A 250V with AWG20* 10A 600V with AWG16*	4A 50V 1.5kV 3

* qualification pending

UTSX 14E12/14D12 derating curves

Current (A)

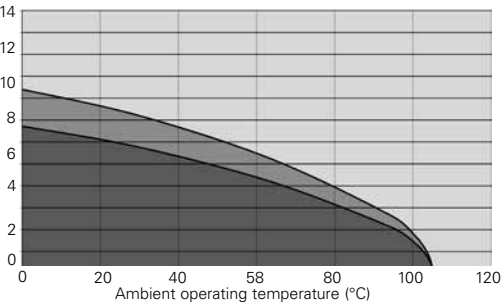

- Current use
- Limited use
- Not recommended use

Test conditions


Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.



Connector part number

UTSX 1492



12 contacts
0A/500V per
UL 1977 with
AWG16 wire

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see Page 107	Square flange receptacle	Without (Fig. 1)	UTSX01492P	UTSX01492S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC1492P	UTSX0JC1492S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC1492P	UTSX1JC1492S
	Plug	Without (Fig. 4)	UTSX61492P	UTSX61492S
	Plug	Cable gland (Fig. 5)	UTSX6JC1492P	UTSX6JC1492S
	Jam nut receptacle	Without (Fig. 6)	UTSX71492P	UTSX71492S
PCB contacts supplied separately see Page 107	Square flange receptacle	Without (Fig. 1)	UTSX01492P	UTSX01492S
	Jam nut receptacle	Without (Fig. 6)	UTSX71492P	UTSX71492S

For discrimination/keying methods see **Page 151**

Souriau UTSX series

1492 (Shell size 14, 12x#16)

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

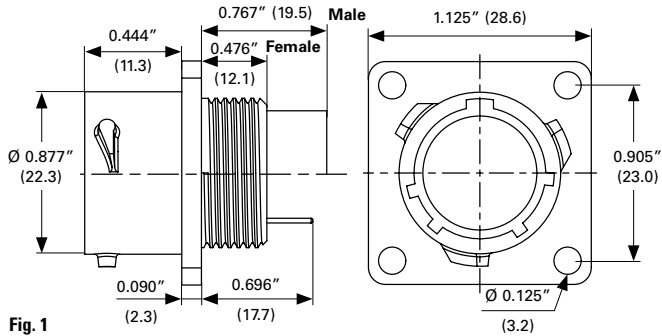


Fig. 1

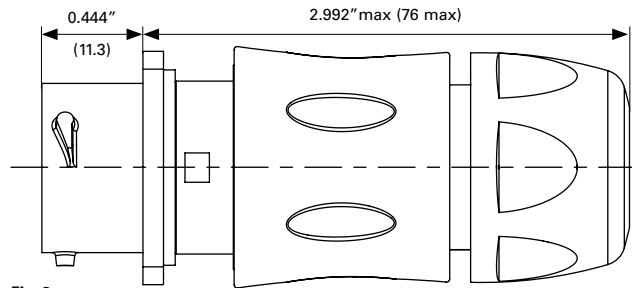


Fig. 2

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC

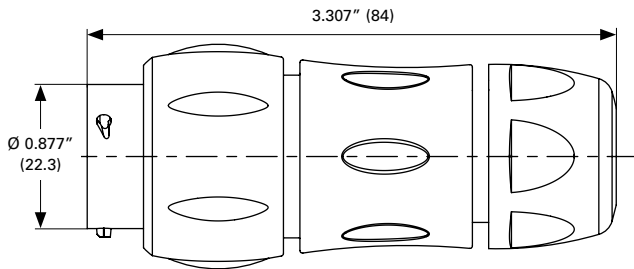


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6 and UTSX6JC

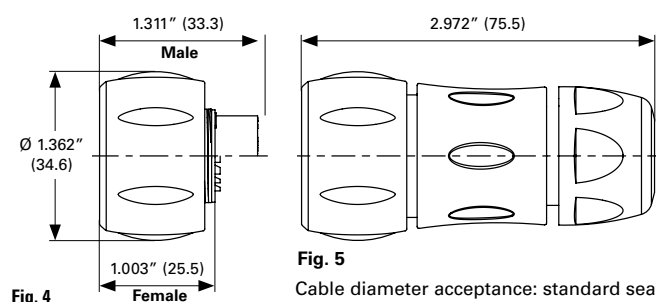


Fig. 4

Fig. 5

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

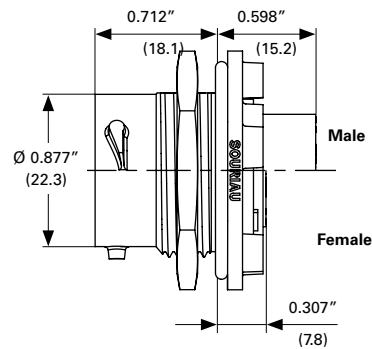


Fig. 6






Fig. 7




Panel cut out

Square flange receptacle - UTSX0

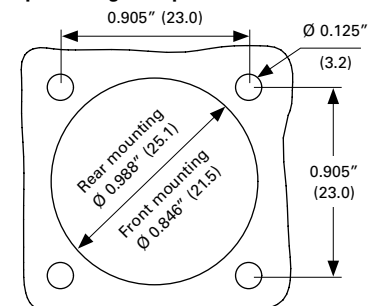

Jam nut receptacle - UTSX7

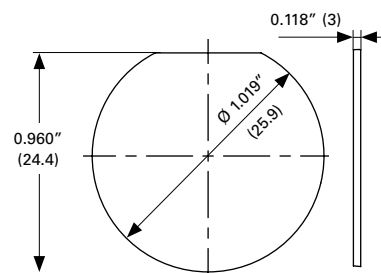

Dimensions in inches (millimeters)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Souriau UTSX series

1492 (Shell size 14, 12x#16)

Tooling

Tooling



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #16 Ø 0.062" (1.6)	RM/RC 28M1K ⁽¹⁾	S16RCM20*
	RM/RC 24M9K ⁽¹⁾	S16RCM20*
	RM/RC 20M13K ⁽¹⁾	S16RCM20*
	RM/RC 20M12K ⁽¹⁾	S16RCM20*
	RM/RC 16M23K ⁽¹⁾	S16RCM16*
	RM/RC 14M30K ⁽¹⁾	S16RCM14*
	SM/SC 24ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 20ML1TK6 ⁽¹⁾	S16SCM20*
	SM/SC 16ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 14ML1TK6 ⁽¹⁾	S16SCML1*
	SM/SC 16ML11TK6 ⁽¹⁾	S16SCML11*

(1): Example of plating, for other plating options see [Page 126](#)
* Heads to be used with handle PN: SHANDLES

#16, #12 and #8 machined contacts



Description	Part number
Crimp tool	M20S-1J
Die casts and stop bushings	See Page 138

Extraction tool #16



Description	Part number
Fig. 1	RX2025GE1
Fig. 2 - Long endurance tool	RX2031J

Contacts #16

Contact style	Contact type	Cable acceptance		Part number	Wire Ø max		Insulator Ø max	
		AWG	inch ²		Male	Female	inch	mm
Crimp contacts	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1K ⁽¹⁾	RC28M1K ⁽¹⁾	0.021"	0.55
		26-24	0.005"-0.009"	0.13-0.25	RM24M9K ⁽¹⁾	RC24M9K ⁽¹⁾	0.031"	0.80
		22-20	0.012"-0.020"	0.32-0.52	RM20M13K ⁽¹⁾	RC20M13K ⁽¹⁾	0.045"	1.15
		22-20	0.012"-0.020"	0.32-0.52	RM20M12K ⁽¹⁾	RC20M12K ⁽¹⁾	0.045"	1.15
		20-16	0.020"-0.059"	0.52-1.48	RM16M23K ⁽¹⁾	RC16M23K ⁽¹⁾	0.070"	1.80
		16-14	0.059"-0.098"	1.48-2.48	RM14M30K ⁽¹⁾	RC14M30K ⁽¹⁾	0.090"	2.30
	Stamped and formed reeled contacts See note ⁽²⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24M1TK6 ⁽¹⁾⁽²⁾	SC24M1TK6 ⁽¹⁾⁽²⁾	—	—
		22-20	0.012"-0.020"	0.32-0.52	SM20M1TK6 ⁽¹⁾⁽²⁾	SC20M1TK6 ⁽¹⁾⁽²⁾	—	—
		18-16	0.031"-0.059"	0.80-1.48	SM16M1TK6 ⁽¹⁾⁽²⁾	SC16M1TK6 ⁽¹⁾⁽²⁾	—	—
		18-16	0.031"-0.059"	0.80-1.48	SM16M11TK6 ⁽¹⁾⁽²⁾	SC16M11TK6 ⁽¹⁾⁽²⁾	—	—
		14	0.098"	2.48	SM14M1TK6 ⁽¹⁾⁽²⁾	SC14M1TK6 ⁽¹⁾⁽²⁾	—	—
		—	—	—	RM20M12E83K ⁽¹⁾	RC20M12E84K ⁽¹⁾	—	—
PCB	Machined ⁽³⁾	—	—	—	—	—	—	—
Coaxial	Cable multipiece	see Pages 130 to 132			RMDXK10D28	RCDXK1D28	—	—
	Cable monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—
	Twisted pair multipiece	see Pages 130 to 132			RMDXK10D28 + yorx090	RCDXK1D28 + yorx090	—	—
	Twisted pair monocrimp	see Pages 130 to 132			RMDX60xxD28	RCDX60xxD28	—	—
Fiber optic	POF contacts (Plastic optical fiber)	—	—	—	RMP0F1000	RCPOF1000B	—	—
Handsoldier	Loaded in the connector	14-18	0.098"-0.031"	2.48-0.80	—	—	—	—

(1): Example of plating, for other plating see **Page 126**


(2): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20M1TK6 becomes SM20ML1TK6

(3): for dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
10A 500V with AWG16 wire	7A 500V with AWG16 wire	10A 63V 1.5kV 3

UTSX 1412 derating curves

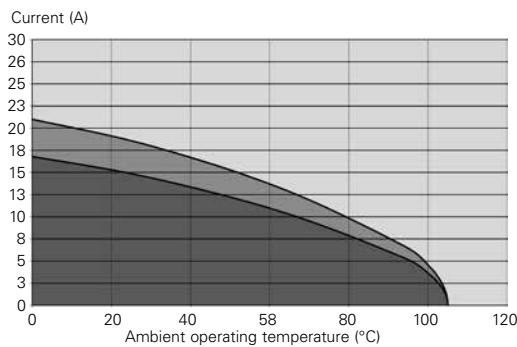

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

12E14/12D14 (Shell size 12, 14x20)



Connector part number

UTSX 12E14/12D14



14 contacts
4.5A/250V per
UL 1977 with
AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 111	Square flange receptacle	Without (Fig. 1)	UTSX012E14P	UTSX012E14S
	Plug	Without (Fig. 2)	UTSX612E14P	UTSX612E14S
	Plug	Cable gland (Fig. 3)	UTSX6JC12E14P	UTSX6JC12E14S
	Jam nut receptacle	Without (Fig. 4)	UTSX712E14P	UTSX712E14S
PCB contacts loaded see Page 111	Square flange receptacle	Without (Fig. 1)	UTSX012D14P	UTSX012D14S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX712D14P	UTSX712D14S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX712D14P32	UTSX712D14S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0


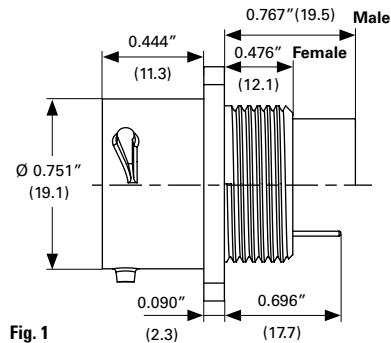


Fig. 1

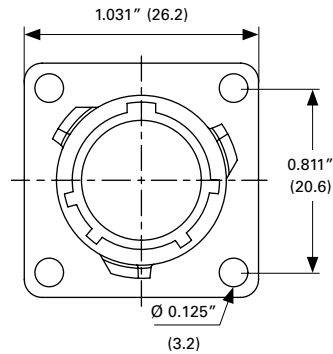

Plug - UTSX6 and UTSX6JC

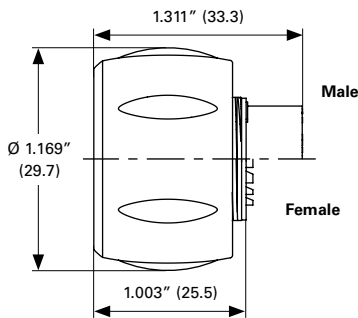


Fig. 2

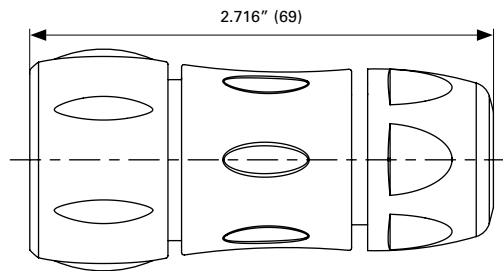


Fig. 3

Cable diameter acceptance: standard seal: from 0.098" to 0.472" (5 to 12), reduced seal: from 0.118" to 0.354" (3 to 9)

Jam nut receptacle UTSX7




Fig. 4




Fig. 5






Fig. 6




Panel cut out

Square flange receptacle - UTSX0

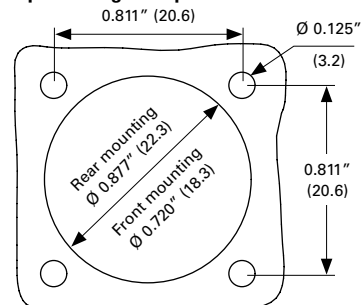

Jam nut receptacle - UTSX7

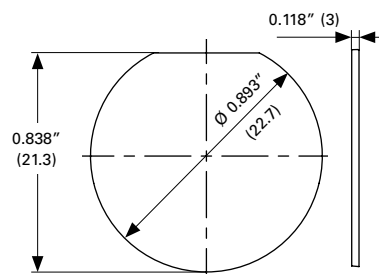

Dimensions in inches (millimeters)

Souriau UTSX series

12E14/12D14 (Shell size 12, 14x20)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS12DCG
IP68 - Metal terminal	UTS12DCGR

Plug sealing cap



Description	Part number
IP68	UTX612DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005587A	85005596

Gasket



Part number
UTFD13B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS712CCRG	UTS612CCRG
Y for Yellow	UTS712CCRY	UTS612CCRY
R for Red	UTS712CCRR	UTS612CCRR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS12DCGE

Contacts #20

Contact type	Plating	Cable acceptance	Cable acceptance		Wire stripping length	
		(AWG)	inch²	mm²	inch	mm
Handsolder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	20-18	0.020"-0.031"	0.32-0.80	0.149"	3.8
PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—


(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
4.5A 250V with AWG20 wire	4.5A 250V with AWG20 wire	5A 32V 1.5kV 3

UTSX 12E4/12D4 derating curves

Current (A)

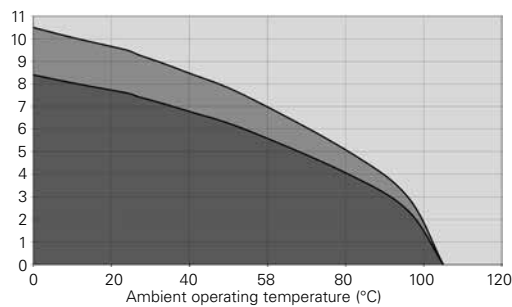

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.


Souriau UTSX series

14E15/14D15 (Shell size 14, 14x#20, 1#16)



Connector part number

UTSX 14E15/14D15



15 contacts
12A 600V per UL1977
with AWG16 wire 5A
250V per UL1977 with
AWG20 wire
(qualification pending)

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Hand solder electrical contacts loaded see Page 115	Square flange receptacle	Without (Fig. 1)	UTSX014E15P	UTSX014E15S
	Plug	Without (Fig. 2)	UTSX614E15P	UTSX614E15S
	Plug	Cable gland (Fig. 3)	UTSX6JC14E15P	UTSX6JC14E15S
	Jam nut receptacle	Without (Fig. 4)	UTSX714E15P	UTSX714E15S
PCB contacts loaded see Page 115	Square flange receptacle	Without (Fig. 2)	UTSX014D15P	UTSX014D15S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX714D15P	UTSX714D15S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX714D15P32	UTSX714D15S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0

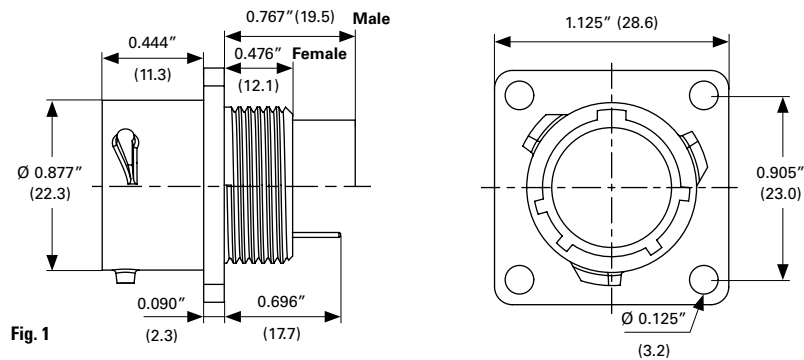


Fig. 1

Plug - UTSX6 and UTSX6JC

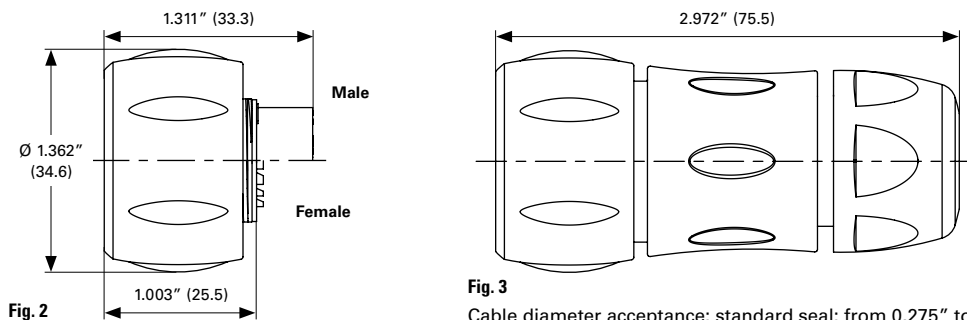


Fig. 2

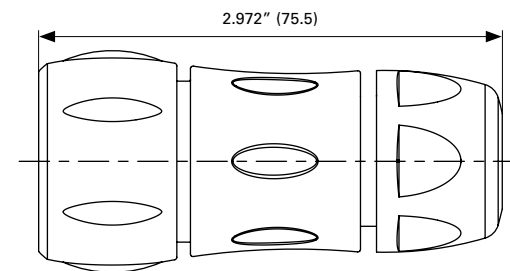


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

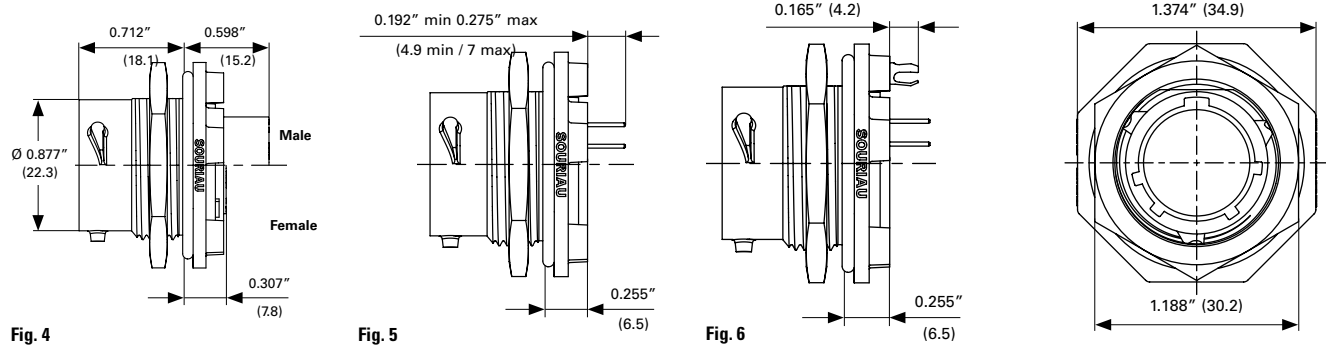



Fig. 4

Fig. 5


Fig. 6

Panel cut out

Square flange receptacle - UTSX0

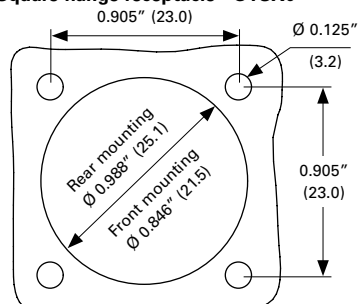

Jam nut receptacle - UTSX7

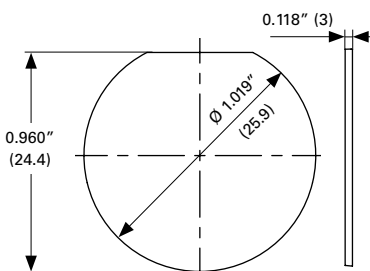

Dimensions in inches (millimeters)

Souriau UTSX series

14E15/14D15 (Shell size 14, 14x#20, 1#16)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Contacts

Contact size	Contact type	Plating	Cable acceptance (AWG)	Cable acceptance		Wire stripping length	
				inch ²	mm ²	inch	mm
#16	Hand solder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	18 - 14	0.032"-0.081"	0.823 - 2.08	0.196"	5
	PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—
#20	Hand solder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	20 - 18	0.012"-0.029"	0.32 - 0.75	0.149"	3.8
	PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—


(1): For dimensions see **Pages 133 or 134**

Electrical characteristics

UL	CSA	IEC
12A 600V with AWG16* 5A 250V with AWG20*	12A 600v with AWG16* 5A 250V with AWG20*	4A 50V 1.5kV 3

* qualification pending

UTSX 14E15/14D15 derating curves

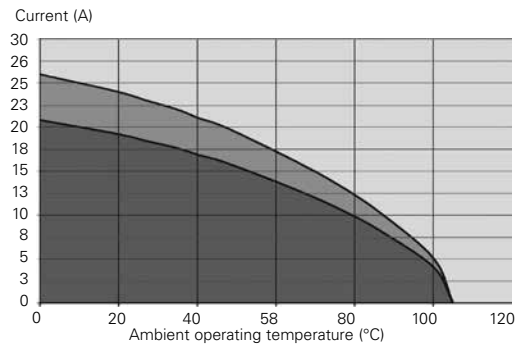

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 16 AWG

Derating curves based on continuous current application.


Souriau UTSX series

14E18/14D18 (Shell size 14, 18x#20)



Connector part number

UTSX 14E18/14D18



18 contacts
4A/250V per
UL 1977 with
AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Handsolder electrical contacts loaded see Page 119	Square flange receptacle	Without (Fig. 1)	UTSX014E18P	UTSX014E18S
	Plug	Without (Fig. 2)	UTSX614E18P	UTSX614E18S
	Plug	Cable gland (Fig. 3)	UTSX6JC14E18P	UTSX6JC14E18S
	Jam nut receptacle	Without (Fig. 4)	UTSX714E18P	UTSX714E18S
PCB contacts loaded see Page 119	Square flange receptacle	Without (Fig. 2)	UTSX014D18P	UTSX014D18S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig. 5)	UTSX714D18P	UTSX714D18S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 6)	UTSX714D18P32	UTSX714D18S32

For discrimination/keying methods see **Page 151**

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0

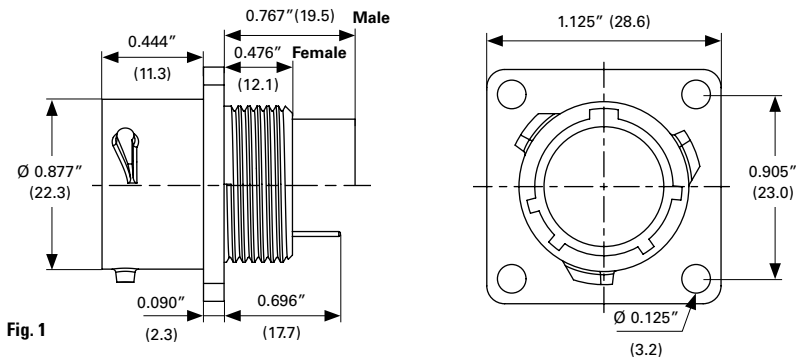


Fig. 1

Plug - UTSX6 and UTSX6JC

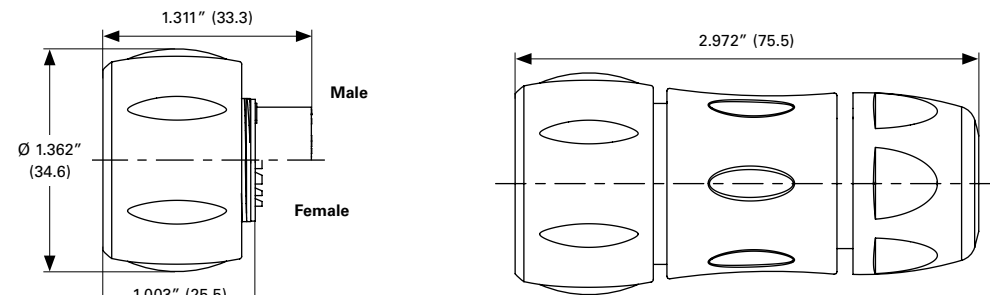


Fig. 2

Fig. 3
Cable diameter acceptance: standard seal: from 0.275\" to 0.551\" (7 to 14), reduced seal: from 0.196\" to 0.472\" (5 to 12)

Jam nut receptacle UTSX7

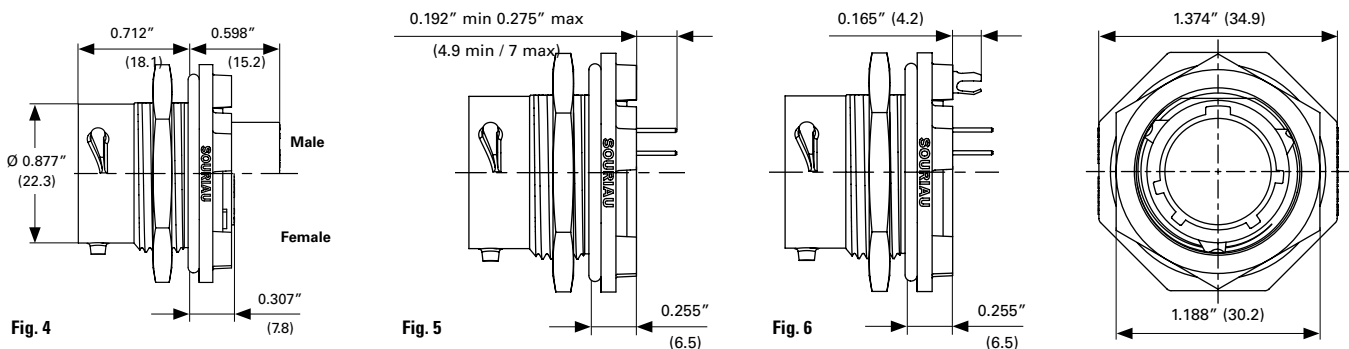


Fig. 4




Fig. 5






Fig. 6




Panel cut out

Square flange receptacle - UTSX0

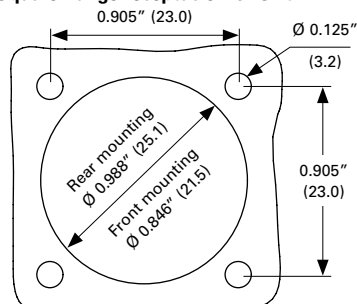

Jam nut receptacle - UTSX7

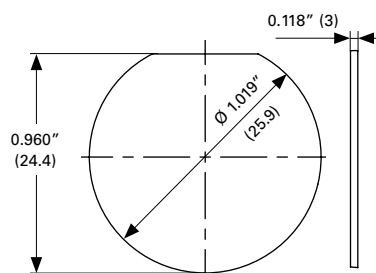

Dimensions in inches (millimeters)

Souriau UTSX series

14E18/14D18 (Shell size 14, 18x#20)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number receptacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Contacts #20


Contact type	Plating	Cable acceptance (AWG)	Cable acceptance		Wire stripping length	
			inch ²	mm ²	inch	mm
Handsolder Loaded in the connector	Min 0.4μ gold over 0.8μ Ni	20-18	0.020"-0.031"	0.32-0.80	0.149"	3.8
PCB Machined ⁽¹⁾	Min 0.4μ gold over 0.8μ Ni	—	—	—	—	—

(1): For dimensions see **Pages 133 or 134****Electrical characteristics**

UL	CSA	IEC
4A 250V with AWG20 wire	4A 250V with AWG20 wire	5A 50V 1.5kV 3

UTSX 14E18/14D18 derating curves

Current (A)

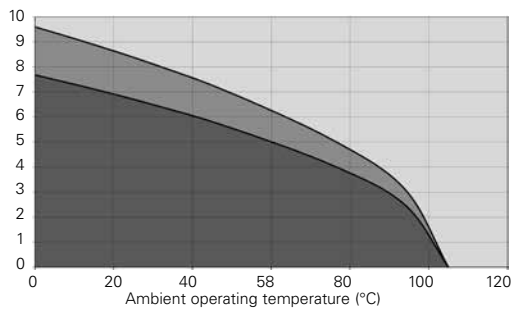

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.


Souriau UTSX series

1419 - 14E19/14D19 (Shell size 14, 19x#20)



Connector part number

UTSX 1419



19 contacts + ground
4.5A/250V per UL 1977
with AWG20 wire

14E19/14D19

19 contacts + ground
4A/250V per UL 1977
with AWG20 wire

Contact type	Connector type	Backshell	Part number Male insert	Female insert
Crimp contacts supplied separately see Page 124	Square flange receptacle	Without (Fig. 1)	UTSX01419P	UTSX01419S
	Square flange receptacle	Cable gland (Fig. 2)	UTSX0JC1419P	UTSX0JC1419S
	Free hanging receptacle	Cable gland (Fig. 3)	UTSX1JC1419P	UTSX1JC1419S
	Plug	Without (Fig. 4)	UTSX61419P	UTSX61419S
	Plug	Cable gland (Fig. 5)	UTSX6JC1419P	UTSX6JC1419S
	Jam nut receptacle	Without (Fig. 6)	UTSX71419P	UTSX71419S
PCB contacts supplied separately see Page 124	Square flange receptacle	Without (Fig. 1)	UTSX01419P	UTSX01419S
Handsolder electrical contacts loaded see Page 124	Square flange receptacle	Without (Fig. 1)	UTSX014E19P	UTSX014E19S
	Plug	Without (Fig. 4)	UTSX614E19P	UTSX614E19S
	Plug	Cable gland (Fig. 5)	UTSX6JC14E19P	UTSX6JC14E19S
	Jam nut receptacle	Without (Fig. 6)	UTSX714E19P	UTSX714E19S
PCB contacts loaded	Square flange receptacle	Without (Fig. 3)	UTSX014D19P	UTSX014D19S
	Jam nut receptacle with stand off and without hold down clip	Without (Fig.7)	UTSX714D19P	UTSX714D19S
	Jam nut receptacle with stand off and with hold down clips	Without (Fig. 8)	UTSX714D19P32	UTSX714D19S32

Sealed unmated

Overmolded cable assembly part numbers

Please contact us directly for overmolded cable assemblies.

Dimensions (For mated connector lengths see Page 143)

Square flange receptacle - UTSX0 and UTSX0JC

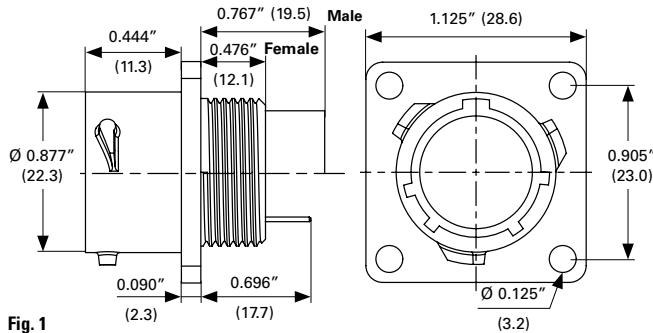


Fig. 1

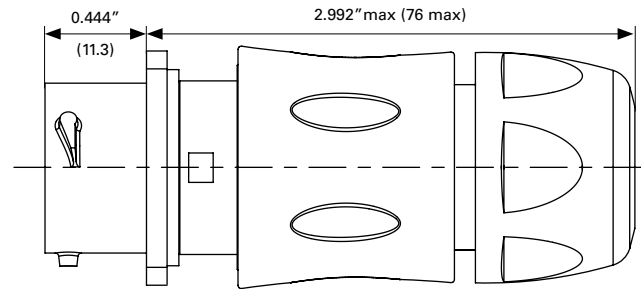


Fig. 2

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Free hanging - UTSX1JC

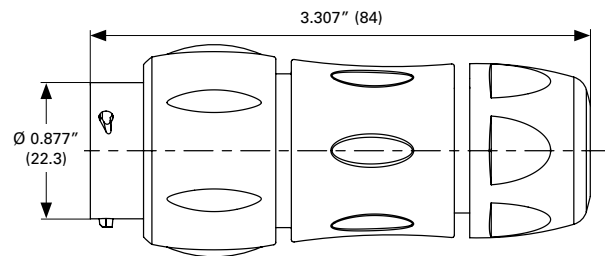


Fig. 3

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Plug - UTSX6 and UTSX6JC




Fig. 4

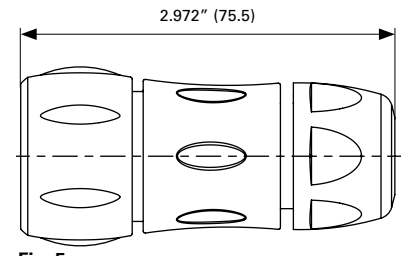


Fig. 5

Cable diameter acceptance: standard seal: from 0.275" to 0.551" (7 to 14), reduced seal: from 0.196" to 0.472" (5 to 12)

Jam nut receptacle UTSX7

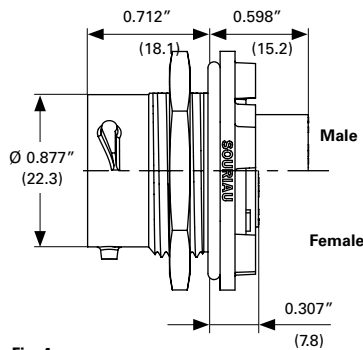


Fig. 4

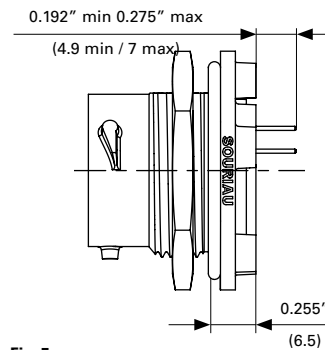


Fig. 5



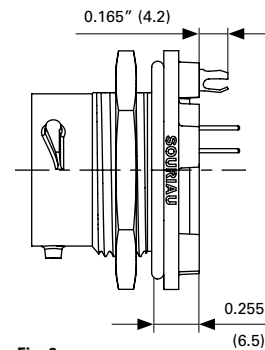


Fig. 6




Panel cut out

Square flange receptacle - UTSX0

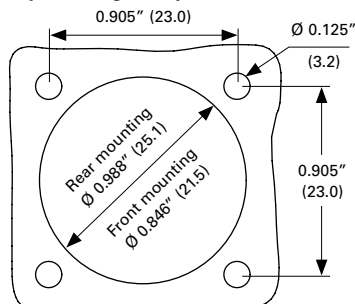

Jam nut receptacle - UTSX7

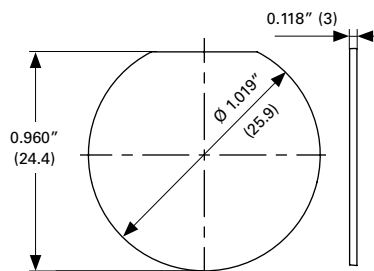

Dimensions in inches (millimeters)

Souriau UTSX series

1419 - 14E19/14D19 (Shell size 14, 19x#20)

Accessories

Jam nut and free hanging receptacle sealing caps



Description	Part number
IP68	UTS14DCG
IP68 - Metal terminal	UTS14DCGR

Square flange sealing cap



Description	Part number
IP68 - Metal terminal	UTS14DCGE

Plug sealing cap



Description	Part number
IP68	UTX614DCG

Plastic protective cap



Part number recep- tacle cap	Part number plug cap
85005588A	85005597

Gasket



Part number
UTFD14B

Color coding rings



Description	Part number receptacles	Part number plugs
G for Green	UTS714CCRG	UTS614CCRG
Y for Yellow	UTS714CCRY	UTS614CCRY
R for Red	UTS714CCRR	UTS614CCRR

Tooling

#20 stamped or machined contacts



Description	Part number
Handle (without head)	Shandles
Box containing handle and several crimp tooling	Toolkit

Crimp tooling (without Shandles)



Contact size	Contacts	Part number of Head
Standard contacts #20 Ø 0.039" (1)	RM/RC 24W3K ⁽¹⁾	S20RCM*
	RM/RC 20W3K ⁽¹⁾	S20RCM*
	RM/RC 18W3K ⁽¹⁾	S20RCM*
	SM/SC 24WL3 ⁽¹⁾⁽²⁾	S20SCM20*
	SM/SC 20WL3 ⁽¹⁾⁽²⁾	S20SCM20*

(1): Example of plating, for other plating options see Page 126
(2): Loose contact
* Heads to be used with handle PN: SHANDLES

Extraction tool #20



Description	Part number
Contacts #20 Ø 0.039" (1)	RX20D44

Dimensions in inches (millimeters)

Souriau UTSX series

1419 - 14E19/14D19 (Shell size 14, 19x#20)

Contacts #20

Contact style	Contact type	Cable acceptance			Part number		Wire Ø max		Insulator Ø max	
		AWG	inch ²	mm ²	Male	Female	inch	mm	inch	mm
Crimp contacts	Machined	26-24	0.005"-0.009"	0.13-0.25	RM24W3K	RC24W3K	0.031"	0.80	0.062"	1.58
		22-20	0.012"-0.020"	0.32-0.52	RM20W3K	RC20W3K	0.045"	1.15	0.070"	1.80
		20-18	0.020"-0.031"	0.52-0.80	RM18W3K	RC18W3K	0.051"	1.30	0.082"	2.10
	Stamped and formed reeled contacts See note ⁽¹⁾ for loose piece	26-24	0.005"-0.009"	0.13-0.25	SM24W3TK6 ⁽¹⁾	SC24W3TK6 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60
		26-24	0.005"-0.009"	0.13-0.25	SM24W3S26 ⁽¹⁾	SC24W3S25 ⁽¹⁾	—	—	0.035"-0.062"	0.90-1.60
		22-20	0.012"-0.020"	0.32-0.52	SM20W3TK6 ⁽¹⁾	SC20W3TK6 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10
		22-20	0.012"-0.020"	0.32-0.52	SM20W3S26 ⁽¹⁾	SC20W3S25 ⁽¹⁾	—	—	0.047"-0.082"	1.20-2.10
PCB	Machined ⁽²⁾	—	—	—	RMW5016K	RCW5016K	—	—	—	—

(1): Loose piece contact available by adding "L" after the "M" for the contact size and the plating. Example: SM20W3TK6 becomes SM20WL3TK6


(2): for dimensions see **Pages 133 or 134**

Contact style	Contact type	Plating	Cable acceptance (AWG)	Wire stripping length	
				inch	mm
Hand solder	Loaded in the connector	Min 0.4µ gold over 0.8µ Ni	20 to 18	0.149"	3.8

Electrical characteristics

UL	CSA	IEC
UTSX 1419 4.5A 250V with AWG20 wire	3A 250V with AWG20 wire	5A 32V 1.5kV 3
UTSX 14E19/14D19 4A 250V with AWG20 wire	4A 250V with AWG20 wire	5A 32V 1.5kV 3

UTSX 1419 - 14E19/14D19 derating curves

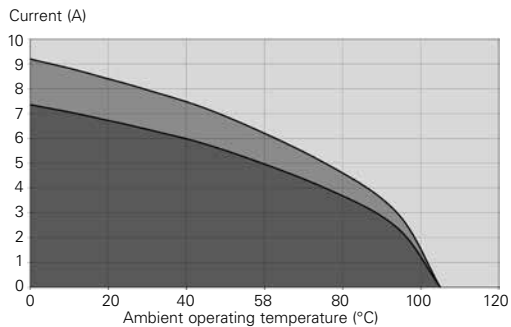

- Current use
- Limited use
- Not recommended use

Test conditions

Contact used: machined contacts
Wires used: 20 AWG

Derating curves based on continuous current application.

UTSX contacts

The TRIM TRIO® product line uses the same contact style in any layout, with the same active part size (i.e. #20, #16, #12, etc.). This allows you to use one type of contact to equip all of your Souriau connectors in the TRIM TRIO® product line.

Please note that the UTSX series is delivered with solder or PCB contacts for Hi-seal versions and without contacts for standard crimp versions. The benefit of this standardization is to drastically reduce inventory costs. In addition, it eliminates the need for additional tooling and simplifies the assembly process. Souriau TRIM TRIO® contacts are designed for simple snap-in installation and further eliminate the need for an insertion tool.

Contact plating selector guide

Once the contact size has been selected, the next step determine which electrical contact type should be used. We offers two main types of electrical contacts:


- Machined
- Stamped and formed



Machined contacts are generally selected as a better solution for power applications or when lower quantities are needed. Stamped and formed contacts offer the ability to be crimped automatically which makes them more suitable for high volume production applications.

The ideal plating is selected based on your application. Use the graph below to identify a plating based on the number of mating cycles, vibration and current/voltage needs for your application.

Note: Do not mix different plating (i.e. tin plated pin contacts with gold plated socket contacts).

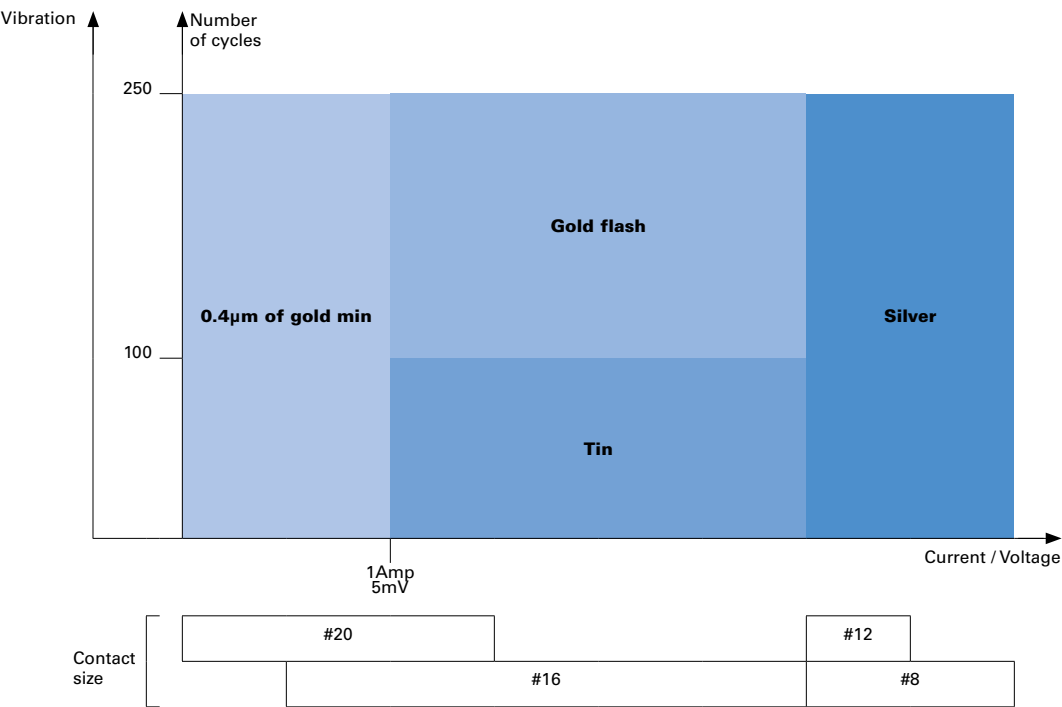

Machined contacts

Contact size	Contact type	Active area
#20 Ø 0.039" (1)	K	0.4µm Gold over 2µm Nickel min
#16 Ø 0.062" (1.6)	K	0.4µm Gold over 2µm Nickel min
	J	Gold flash over Nickel 2µm min
	T	Tin 3µm (-0/+2) over 1.3µm Nickel min
	D28 for Coax contacts only	0.75µm min Gold over 2µm Nickel min
#12 Ø 0.094" (2.4)	A	2µm Nickel + 2µm Ag
	K	0.4µm Gold over 2µm Nickel min
#8 Ø 0.141" (3.6)	A	2µm Nickel + 2µm Ag

Stamped and formed contacts

Contact size	Plating code	Plating description Active area	Other area
#20 Ø 0.039" (1)	S25 (female)	0.75µm Gold min over Nickel	Gold flash over Nickel
	S26 (male)	0.75µm Gold min over Nickel	Gold flash over Nickel
	TK6	0.5µm - 2.5µm Sn pre-plated	-
#16 Ø 0.062" (1.6)	S31	Gold flash over Nickel	Crimped area: 1.3µm
	S18	0.75µm Gold min over Nickel	Tin min over Nickel
			Other areas: 1.3µm
			Tin min
	D70	0.13µm Gold min over Nickel	Gold flash over Nickel
	TK6	0.5µm - 2.5µm Sn pre-plated	-

Contacts supplied separately

Contact size	Contact type	Resistance
Electrical characteristics: contact resistance		
#20 Ø 0.039" (1)	Machined	< 6mΩ
	Stamped and formed	< 6mΩ
#16 Ø 0.062" (1.6)	Machined	< 3mΩ
	Stamped and formed	< 6mΩ
#12 Ø 0.094" (2.4)	Machined	< 5mΩ
#8 Ø 0.141" (3.6)	Machined	< 5mΩ

TRIM TRIO® contacts are available in a wide variety of packaging, from very small quantities (small bulk packaging) to very large quantities (reeled parts).

Contacts size #20 / Ø 0.039" (1) and #16 / Ø 0.062" (1.6)

Stamped and formed contacts



Description	Number
Loose package	25 pieces
Reeled	3,000 pieces

Machined contacts



Description	Number
Bulk package	50 pieces
Bulk package	1,000 pieces
Reeled size #16 only	2,000 pieces

Contacts machined size #12 / Ø 0.094" (2.4) and #8 / Ø 0.141" (3.6)

Machined contacts



Description	Number
Bulk package	100 pieces

Note: 1,000 pieces bulk package available by adding 1000 at the end of the part number: e.g. RC16M23K1000 2,000 pieces reeled package available by adding K at the beginning of the part number: e.g. KRC16M23K

Standard version

Contact size	Type	Wire size			Part number		Insulator Ø max		Available plating see Page 126
		AWG	inch ²	mm ²	Male	Female	inch	mm	
#20 Ø 0.039" (1)	Machined	26-24	0.005"-0.007"	0.13-0.20	RM24W3K	RC24W3K	0.062" max	1.58 max	K
	Stamped and formed	26-24	0.005"-0.009"	0.13-0.25	SM24W3-(1)	SC24W3-(1)	0.035"-0.062"	0.89-1.58	TK6 S25 (female) S26 (male)
	Stamped and formed	26-24	0.005"-0.009"	0.13-0.25	SM24WL3-(2)	SC24WL3-(2)	0.035"-0.062"	0.89-1.58	TK6 S25 (female) S26 (male)
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20W3K	RC20W3K	0.062" max	1.58 max	K
	Stamped and formed	22-20	0.013"-0.019"	0.35-0.5	SM20W3-(1)	SC20W3-(1)	0.046"-0.081"	1.17-2.08	TK6 S25 (female) S26 (male)
	Stamped and formed	22-20	0.013"-0.019"	0.35-0.5	SM20WL3-(2)	SC20WL3-(2)	0.046"-0.081"	1.17-2.08	TK6 S25 (female) S26 (male)
	Machined	20-18	0.019"-0.031"	0.5-0.80	RM18W3K	RC18W3K	0.082" max	2.10 max	K
#16 Ø 0.062" (1.6)	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1-	RC28M1-	0.043"	1.1	K, J
	Machined	26-24	0.005"-0.007"	0.13-0.2	RM24M9-	RC24M9-	0.062"	1.6	K, J
	Stamped and formed	26-24	0.005"-0.009"	0.13-0.25	SM24M1-(1) SM24ML1-(2)	SC24M1-(1) SC24ML1-(2)	0.089"-0.062"	0.89-1.58	S31, S18, TK6
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20M13-	RC20M13-	0.070"	1.8	K, J
	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20M12-	RC20M12-	0.086"	2.2	K, J
	Stamped and formed	22-20	0.013"-0.019"	0.35-0.5	SM20M1-(1) SM20ML1-(2)	SC20M1-(1) SC20ML1-(2)	0.046"-0.081"	1.17-2.08	S31, S18, TK6
	Machined	18-16	0.031"-0.059"	0.92-1.5	RM16M23-	RC16M23-	0.125"	3.2	K, J
	Stamped and formed	18-16	0.031"-0.059"	0.8-1.5	SM16M1-(1) SM16ML1-(2)	SC16M1-(1) SC16ML1-(2)	No insulation grip	No insulation grip	S31, S18, TK6
	Stamped and formed	18-16	0.031"-0.059"	0.8-1.5	SM16M11-(1) SM16ML11-(2)	SC16M11-(1) SC16ML11-(2)	0.081"-0.118"	2.08-3.0	S31, S18, TK6
	Machined	16-14	0.059"-0.098"	1.5-2.5	RM14M30-	RC14M30-	0.125"	3.2	K, J
	Stamped and formed	14	0.078"-0.098"	2.0-2.5	SM14M1-(1) SM14ML1-(2)	SC14M1-(1) SC14ML1-(2)	No insulation grip	No insulation grip	S31, S18, TK6
#12 Ø 0.094" (2.4)	Machined	20	0.020"-0.015"	0.52-0.4	82911457N-	82911456-	0.157"	4.0	A, K
	Machined	20	0.019"	0.5	82911459N-	82911458-	0.157"	4.0	A, K
	Machined	18	0.2.952"-0.039"	0.75-1.0	82911461N-	82911460-	0.157"	4.0	A, K
	Machined	16	0.059"	1.5	82911463N-	82911462-	0.157"	4.0	A, K
	Machined	14	0.098"	2.5	82911465N-	82911464-	0.157"	4.0	A, K
	Machined	12	0.157"	4	82911467N-	82911466-	0.157"	4.0	A, K
#8 Ø 0.141" (Ø 3.6)	Machined	16	0.059"	1.5	82913601A	82913600A	0.248"	6.3	A
	Machined	14	0.098"	2.5	82913603A	82913602A	0.248"	6.3	A
	Machined	12	0.157"	4	82913605A	82913604A	0.248"	6.3	A
	Machined	10	0.236"	6.0	82913607A	82913606A	0.248"	6.3	A
	Machined	8	0.393"	10.0	82913609A	82913608A	0.248"	6.3	A

(1) contact reeled

(2) loose contact


Example: RM24W3K - Size #20, Machined, AWG24 wire.

First mate, last break male contacts

The layouts UTSX103, UTSX124, UTSX12E4/12D4, UTSX142G1, UTSX147 and UTSX14E7/14D7 are already designed to have a first mate, last break connection on the ground line. That's why, for cavities marked with the ground symbol, standard contacts will fulfill the same role as a first mate, last break contact used in a standard cavity.

For the other layouts (without ground marking) a specific contact is necessary to achieve ground connection.

Please choose your contact from the table below.

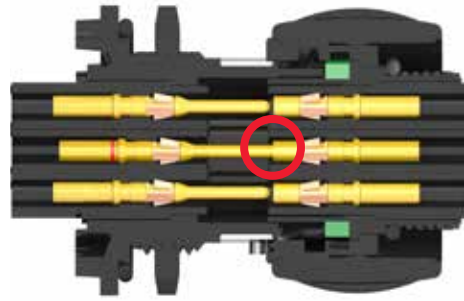


										Color band		Available plating see Page 126
Wire size					Part number	Wire Ø max		Insulator Ø max				
Contact size	Type	AWG	inch²	mm²	Male	inch	mm	inch	mm	Front	Rear	
#16 Ø 0.062" (1.6)	Machined	30-28	0.002"-0.003"	0.05-0.08	RM28M1GE1K	0.021"	0.55	0.039"	1.0	-	Red	K
	Machined	26-24	0.005"-0.007"	0.13-0.2	RM24M9GE1K	0.031"	0.8	0.062"	1.6	Red	Red	K
Longer male contact +0.039" (+1)	Machined	22-20	0.012"-0.020"	0.32-0.52	RM20M12GE1K	0.045"	1.15	0.086"	2.2	Blue	Red	K
	Machined	18-16	0.031"-0.059"	0.92-1.5	RM16M23GE1K	0.070"	1.8	0.125"	3.2	—	Red	K
	Machined	16-14	0.059"-0.098"	1.5-2.5	RM14M30GE1K	0.089"	2.26	—	—	—	Red	K

Last break, first mate female contacts

In order to create a last break, first mate connection, a shorter female contact is necessary. On the other side, a standard male contact can be used.

A complete offer of contacts is available to realize this connection type according the wire section used for our contact #16. Please choose your contact from the table below.

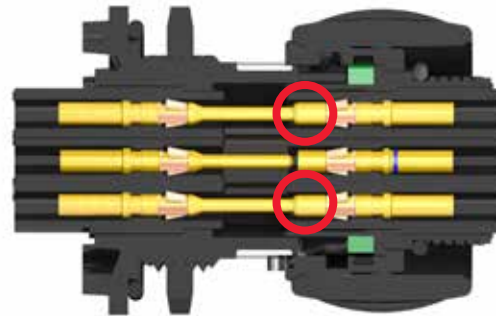

												Available plating see Page 126
Contact size	Type	Wire size		Part number	Wire Ø max		Insulator Ø max		Front	Rear		
		AWG	inch²		mm²	inch	mm	inch	mm			
#16 Ø 0.062" (1.6)	Machined	30-28	0.002"-0.003"	0.05-0.08	RC28M1GE7K	0.021"	0.55	0.039"	1.0	-	Blue	K
	Machined	26-24	0.005"-0.007"	0.13-0.2	RC24M9GE7K	0.031"	0.8	0.062"	1.6	Red	Blue	K
Shorter female contact -0.027" (-0.7)	Machined	22-20	0.012"-0.020"	0.32-0.52	RC20M13GE7K	0.045"	1.15	0.070"	1.8	Black	Blue	K
	Machined	22-20	0.012"-0.020"	0.32-0.52	RC20M12GE7K	0.045"	1.15	0.086"	2.2	Blue	Blue	K
	Machined	18-16	0.031"-0.059"	0.92-1.5	RC16M23GE1K	0.070"	1.8	0.125"	3.2	—	Blue	K
	Machined	16-14	0.059"-0.098"	1.5-2.5	RC14M30GE1K	0.089"	2.26	—	—	—	Blue	K

Coaxial contacts

We provides two types of coaxial contacts suitable for 48 or 75Ω, coaxial cable or twisted pair cable.

Monocrimp coaxial contact

- The monocrimp one-piece coaxial contacts offer high reliability plus the economic advantage of a 95% reduction in installation time over conventional assembly methods. This is achieved by simultaneously crimping both the inner conductor and outer braid or drain wire.




Multipiece crimp coaxial contact

- The inner conductor and outer braid is crimped individually.
- The thermoplastic insulating bushing in the outer body is designed to accept and permanently retain the inner contact.
- An outer ferrule is used to connect the braid to the outer contact and provide cable support to ensure against bending and vibration.



Suitable for coaxial cable or twisted cable

- For jacket diameter from 0.070" to 0.120" (1.78 to 3.05). Inner conductor up to 0.096" (2.42) diameter
- For jacket diameter from 0.025" to 0.057" (0.64 to 1.45). Inner conductor from AWG30 to AWG24

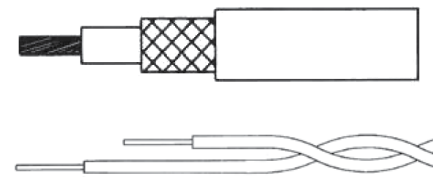

Contacts for coaxial cable summary

Contact type	Contact range	
	Male contact	Female contact
Multipiece	RMDXK10D28	RCDXK1D28
Monocrimp	RMDX60xxD28	RCDX60xxD28

Contacts for twisted pairs cable summary

Contact type	Contact range	
	Male contact	Female contact
Multipiece	RMDXK10D28 + Yorx090	RCDXK1D28 + Yorx090
Monocrimp	RMDX60xxD28	RCDX60xxD28

Coaxial cable - contact monocrimp and multipiece

Cable type	Impedance	Contact type	Ø over jacket		Ø over dielectric		Inner cond size Ext. Ø		Ø outer braid		Male contact kit for coaxial cable	Female contact kit for coaxial cable
			inch	mm	inch	mm	inch	mm	inch	mm		
RG161/U	75	Multi piece	0.09"	2.29	0.057"	1.45	—	—	—	—	RMDXK10D28	RCDXK1D28
RG179A/U	75	Multi piece	0.105"	2.67	0.063"	1.6	0.011"	0.3	0.084" max	2.13 max	RMDXK10D28	RCDXK1D28
RG179B/U	75	Multi piece	0.105"	2.67	0.063"	1.6	0.011"	0.3	0.084" max	2.13 max	RMDXK10D28	RCDXK1D28
RG187/U	75	Multi piece	0.11" max	2.79 max	0.06"	1.52	0.011"	0.3	—	—	RMDXK10D28	RCDXK1D28
RG188/U	48	Multi piece	0.11" max	2.79 max	0.06"	1.52	0.020"	0.51	0.078" max	1.98 max	RMDXK10D28	RCDXK1D28
RG174/U	48	Multi piece	0.11"	2.92	0.06"	1.52	0.018"	0.05	0.088" max	2.24 max	RMDXK10D28	RCDXK1D28
AMPHENOL 21-598	48	Multi piece	0.105"	2.67	0.06"	1.52	0.018"	0.05	—	—	RMDXK10D28	RCDXK1D28
RG196/U	48	Multi piece	0.08" max	2.03 max	0.034"	0.86	0.011"	0.3	—	—	RMDXK10D28	RCDXK1D28
RG152A/U	48	Multi piece	0.075"	1.91	0.034"	0.84	0.011"	0.3	0.054" max	1.37 max	RMDXK10D28	RCDXK1D28
RG/188A/U	48	Mono crimp	0.110"	2.79	0.06"	1.52	0.020"	0.51	0.078" max	1.98 max	RMDX6036D28	RCDX6036D28
KX21TVT (europe) RG152 B/U	48	Mono crimp	0.075"	1.91	0.034"	0.84	0.011"	0.3	0.054" max	1.37 max	RMDX6034D28	RCDX6034D28
RG152 / BU	48	Mono crimp	0.075"	1.91	0.034"	0.84	0.011"	0.3	0.054" max	1.37 max	RMDX6050D28	RCDX6016D28
RG174/U	48	Mono crimp	0.115"	2.92	0.06"	1.52	0.018"	0.05	0.088" max	2.24 max	RMDX6032D28	RCDX6032D28
RG188A/U	48	Mono crimp	0.11"	2.79	0.06"	1.52	0.020"	0.51	0.078" max	1.98 max	RMDX6036D28	RCDX6036D28
RG316/U	48	Mono crimp	0.107"	2.72	0.06"	1.52	0.020"	0.51	0.078" max	2.05 max	RMDX6036D28	RCDX6036D28
raychem 5024A3111	48	Mono crimp	0.12"	3.05	0.083"	2.11	0.025"	0.64	0.097"	2.46	RMDX6052D28	RCDX6052D28
raychem 5026e1614	48	Mono crimp	0.083"	2.11	0.05"	1.27	0.018"	0.05	0.067"	1.7	RMDX6036D28	RCDX6036D28
surprenant pn 8134	—	Multi piece	0.1"	2.54	0.058"	1.47	0.011"	0.3	—	—	RMDXK10D28	RCDXK1D28
PRD PN 247AS-C1123-001	—	Mono crimp	0.103"	2.62	0.06"	1.52	0.020"	0.51	0.078"	1.98	RMDX6018D28	RCDX6018D28
PRD PN 247AS-C1251	—	Mono crimp	0.092"	2.34	0.05"	1.27	0.025"	0.64	0.067"	1.7	RMDX6018D28	RCDX6018D28
JUDD C15013010902	—	Mono crimp	0.087"	2.13	0.05"	1.27	0.018"	0.05	0.066"	1.67	RMDX6036D28	RCDX6036D28
CDC PIN22939200	—	Mono crimp	0.09"	2.29	0.048"	1.20	0.011"	0.3	0.064"	1.63	RMDX6046D28	RCDX6016D28
CDC PIN22939200	—	Mono crimp	0.09"	2.29	0.048"	1.20	0.011"	0.3	0.064"	1.63	RMDX6050D28	RCDX6016D28
CDC PIN245670000	—	Mono crimp	0.104"	2.64	0.067"	1.7	0.011"	0.3	0.083"	2.11	RMDX6050D28	RCDX6016D28
ampex	—	Mono crimp	0.114"	2.9	0.075"	1.91	0.014"	0.36	0.09"	1.29	RMDX6032D28	RCDX6032D28
TI PN 920580	—	Mono crimp	0.7"	1.78	0.038"	0.94	0.018"	0.05	0.054"	1.37	RMDX6024D28	RCDX6024D28
Honeywell PN 58000062	—	Mono crimp	0.12"	3.05	0.077"	1.94	0.016" solid	0.41 solid	0.096"	2.42	RMDX6026D28	RCDX6026D28
—	—	Mono crimp	0.104"	2.64	0.067"	1.7	0.011"	0.3	—	2.11	RMDX6050D28	—
—	—	Mono crimp	0.09"	2.29	0.048"	1.20	0.011"	0.3	—	1.63	RMDX6050D28	—
—	—	Mono crimp	0.114"	2.9	0.075"	1.91	0.014"	0.36	—	1.29	RMDX6032D28	RCDX6032D28
—	—	Mono crimp	0.07"	1.78	0.038"	0.94	0.018"	0.05	—	1.37	RMDX6024D28	RCDX6024D28
—	—	Mono crimp	0.12"	3.05	0.077"	1.94	0.016"	0.41	—	2.42	RMDX6026D28	RCDX6026D28

Twisted cable - contact monocrimp and multipiece

Cable type	Contact type	Inner AWG cond	Ø over jacket (single wire)		Inner cond size		Ø outer braid		Male contact kit for coaxial cable	Female contact kit for coaxial cable	
			inch	mm	Stranded definition	Ext. Ø inch	mm	inch			mm
2#24 stranded MIL-W-16878 type B	Multi piece	24	0.049" max	1.24 max	7/.008	—	—	—	—	RMDXK10D28	RCDXK1D28
2 #24 solid MIL-W-74 type LW	Multi piece	24	0.047" max	1.12 max	1/.0201	—	—	—	—	RMDXK10D28	RCDXK1D28
2 #26 stranded MIL-W-74 type LW or MIL-W-16878 type B&E	Multi piece	26	0.043" max	1.09 max	7/.0063	0.006"	0.16	—	—	RMDXK10D28	RCDXK1D28
2 #26 solid MIL-W-81822/3	Multi piece	26	0.028" max	0.71 max	—	—	—	—	—	RMDXK10D28	RCDXK1D28
Twisted pair 1/.201 solid MIL-W-74 type LW or MIL-W-16878	Multi piece	26	0.044" max	1.12 max	1/.0201	0.020"	0.511	—	—	RMDXK10D28	RCDXK1D28
Twisted pair solid MIL-W-81822/3	Multi piece	26	0.028" max	0.71 max	1/.0126	0.012"	0.32	—	—	RMDXK10D28	RCDXK1D28
#26 7/.0036 per Hitachi spec ec-711 (13-2820)	Mono crimp	—	0.046"	1.17	7/.0036	—	—	—	—	RMDX6031D28 + YORX090	RCDX6031D28 + YORX090
20218201	Mono crimp	—	0.028"	0.71	—	—	—	—	—	RMDX6031D28 + YORX090	RCDX6031D28 + YORX090
#30 solid	Mono crimp	—	0.025"	0.64	—	—	—	—	—	RMDX6015D28 + YORX090	RCDX6015D28 + YORX090
#26 7/.0063	Mono crimp	26	0.028"	0.71	7/.063	0.006"	0.16	—	—	RMDX6031D28 + YORX090	RCDX6031D28 + YORX090
#26 19/.004	Mono crimp	26	0.049"	1.24	19/.004	—	—	—	—	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
#24 7/.008	Mono crimp	24	0.049"	1.24	7/.008	—	—	—	—	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
#24 19/.005	Mono crimp	24	0.057"	1.45	19/.005	—	—	—	—	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
—	Mono crimp	26	—	1.25	—	—	—	0.748"x 0.004"	19x0.1	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
—	Mono crimp	24	—	1.25	—	—	—	0.275"x 0.007"	7x0.2	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
—	Mono crimp	24	—	1.45	—	—	—	0.748"x 0.005"	19x0.13	RMDX6019D28 + YORX090	RCDX6019D28 + YORX090
—	Mono crimp	26	—	0.7	—	—	—	0.275"x 0.006"	7x0.16	RMDX6031D28 + YORX090	RCDX6031D28 + YORX090

PCB contacts supplied separately - UTSX standard series


PCB soldering



The UTSX series can be used in a wave soldering process but not reflow soldering process.
All high temperature processes are prohibited.

Contact size	Type	Part number Male	Female	Plating see Page 126
#20 Ø 0.039" (1)	Short version	RMW50A7K	RCW50A7K	K
	Long version	RMW5016K	RCW5016K	K
#16 Ø 0.062" (1.6)	Short version	RM20M12E8K	RC20M12E8K	K
	Long version	RM20M12E83K	RC20M12E83K	K
	Long version	RM20M12E83K	RC20M12E84K	K
#8 Ø 0.141" (3.6)	—	82911685NPC	82911684NPC	2 µm Ni
	—	82911685NAPC	82911684NAPC	3 µm Ag

Minimal length G



Dimension of dipsolder contacts out of connector (contacts to be ordered separately).

UTSX0 with PCB contacts #16

Connector size	Pin contact RM20M 12E8K*				Socket contact RC20M 12E8K*				RC20M 12E84K*				RC20M 12E87K*	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
10	0.165"	4.2	0.370"	9.4	0.507"	12.9	0.165"	4.2	0.370"	9.4	0.507"	12.9	0.255"	6.5
12	0.141"	3.6	0.346"	8.8	0.484"	12.3	0.165"	4.2	0.370"	9.4	0.507"	12.9	0.255"	6.5
14	0.129"	3.3	0.334"	8.5	0.472"	12.0	0.102"	2.6	0.307"	7.8	0.444"	11.3	0.192"	4.9

UTSX7 with PCB contacts #20 and #16

Connector size	Pin contact RM20M 12E83K*				RMW 50A7K*				Socket contact RMW 5016K*				RC20M 12E84K*				RCW 50A7K*				RCW 5016K*			
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
10	0.287"	7.3	0.425"	10.8	0.330"	8.4	0.366"	9.3	0.141"	3.6	0.330"	8.4	0.366"	9.3	—	—	—	—	—	—	—	—	—	—
12	0.287"	7.3	0.425"	10.8	0.330"	8.4	0.366"	9.3	0.153"	3.9	0.330"	8.4	0.366"	9.3	—	—	—	—	—	—	—	—	—	—
14	0.287"	7.3	0.425"	10.8	0.330"	8.4	0.366"	9.3	0.141"	3.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—

* Plating indication see Page 126

UTSX7 with PCB contacts #16 and #8

Connector size	Pin contact RM20M12E83K*		82911685NPC*		Socket contact RC20M12E87K*		82911684NPC*	
	inch	mm	inch	mm	inch	mm	inch	mm
UTSX7142G1P	—	—	0.251"	6.4	—	—	—	—
UTSX7142G1S	—	—	—	—	—	—	0.322"	8.2
UTSX7142G1SNPT	—	—	0.228"	5.8	—	—	0.212"	5.4
UTSX718X2M3	0.192"	4.9	4.5	4.5	0.141"	3.6	0.204"	5.2
UTSX7183G1SNPT	—	—	—	—	—	—	0.164"	4.17

* Plating indication see Page 126


PCB contacts loaded - UTSX sealed unmated series

PCB soldering

The UTSX series can be used in a wave soldering process, but not reflow soldering process.
All high temperature processes are prohibited.


Minimal length G

Dimension of dipsolder contacts out of connector (contacts to be ordered separately).



UTSX0

Connector size	Connector part Number	Pin contact		G max		Socket contact		G max	
		G min				G min			
		inch	mm	inch	mm	inch	mm	inch	mm
10	10D6 - 10D98 - 10D7	0.318"	8.1	0.401"	10.2	0.318"	8.1	0.405"	10.3
12	12D2 - 12D3 - 12D8 - 12D10	0.318"	8.1	0.401"	10.2	0.318"	8.1	0.405"	10.3
	12D4	0.322"	8.2	0.393"	10	0.318"	8.1	0.405"	10.3
	12D14	0.283"	7.2	0.354"	9	0.279"	7.1	0.362"	9.2
14	14D5 - 14D12 - 14D15 14D18 - 14D19	0.318"	8.1	0.401"	10.2	0.318"	8.1	0.405"	10.3
	14D7	0.322"	8.2	0.393"	10	0.318"	8.1	0.405"	10.3



UTSX7

Connector size	Connector part Number	Pin contact		G max		Socket contact		G max	
		G min				G min			
		inch	mm	inch	mm	inch	mm	inch	mm
10	10D6 - 10D98 - 10D7	0.185"	4.7	0.287"	7.3	0.185"	4.7	0.275"	7
12	12D2 - 12D3 - 12D8 - 12D10	0.185"	4.7	0.287"	7.3	0.188"	4.8	0.275"	7
	12D4	0.192"	4.9	0.279"	7.1	0.188"	4.8	0.275"	7
	12D14	0.153"	3.9	0.244"	6.2	0.149"	3.8	0.236"	6
14	14D5 - 14D12 - 14D15 14D18 - 14D19	0.188"	4.8	0.287"	7.3	0.192"	4.9	0.275"	7
	14D7	0.192"	4.9	0.279"	7.1	0.192"	4.9	0.275"	7

Size 16 fiber optic contacts for UTSX and other TRIM TRIO® connectors

POF



Description

Size 16 fiber optic contacts are designed for the integration of optical links in UTSX and other TRIM TRIO® cable connectors.

The fiber optic contacts are designed to accommodate:

- Plastic optical fiber (POF) 0.039" (1) core and 0.086" (2.2) jacket

Typical features and benefits are:

- Socket contact is spring loaded to avoid any air gap between the two optical faces.
- High precision pieces provide low insertion loss.
- We can provide custom harness solutions for specific customer requirements including single jumpers, multiways harness and active device housings.

Technical specifications

Performance

- Fiber type: POF
- Wave length: 650 nm
- Optical insertion loss (typ.): 2 dB max.
- Jacketed external diameter: 0.086" (2.2)
- Temperature range: -25°C to +70°C
- Cable retention: 49N
- Mating cycles without cleaning: 48
- Max. mating cycles: 500

Construction

- Contact body: copper alloy

Connector accommodation

Any TRIM TRIO® size 16 contact can be used in any contact position in any connector in the TRIM TRIO® size 16 interconnection system: UTP, UTGX, UTS, UTSX, UTO and UTL.

Ordering information

Plastic optical fiber contact

Male contact	Female contact
RMP0F1000	—

Plastic optical fiber tools

Standard tooling kit - P/N 80MS0004

The standard tooling kit is made of the part numbers below that can be ordered separately as well.

Part number	Descriptions
80WD0005	Stripping tool
80WD0025	Automatic stripping tool for Ø 0.196" (0.5), 0.023" (0.6), 0.027" (0.7) and 0.149" (3.8)
80WM0006	Ruler
80WP0005	Polishing plate
80WP0013	Non slip base (to hold the polishing plate)
80WP0014	Polishing disk (grain size 9µm)
80WP0018	Polishing tool
80WP0019	Polishing disk (grain size 30µm)
80WS0002	Crimping plier

Specific tooling list - Can only be ordered separately

Part number	Descriptions
80WG0010	Needle
80WG0015	Capsule
80WG0016	Syringe
80WN0005	Dry air spray
80WN0006	Optical paper
80WN0012	Dropper bottle
80WN0008	Wiping solvent

Crimping tools for standard contacts

Contact size	Part number	Head*	Handles*	Extraction tools
#20 Ø 0.039" (1)	RM/RC 24W3K	S20RCM	SHANDLES	RX20D44
	RM/RC 20W3K	S20RCM	SHANDLES	RX20D44
	RM/RC 18W3K	S20RCM	SHANDLES	RX20D44
	SM 24WL3S ^{*(1)} SC 24WL3S ^{*(1)}	S20SCM20	SHANDLES	RX20D44
	SM/SC 20WL3S ^{*(1)}	S20SCM20	SHANDLES	RX20D44
#16 Ø 0.062" (1.6)	RM/RC 28M1*	S16RCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	RM/RC 24M9*	S16RCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	RM/RC 20M13*	S16RCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	RM/RC 20M12*	S16RCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	RM/RC 16M23*	S16RCM16	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	RM/RC 14M30*	S16RCM14	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	SM/SC 24ML1 ^{*(1)}	S16SCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	SM/SC 20ML1 ^{*(1)}	S16SCM20	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	SM/SC 16ML1 ^{*(1)}	S16SCML1	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	SM/SC 14ML1 ^{*(1)}	S16SCML1	SHANDLES	RX2025GE1 or RX2031J long endurance tool
	SM/SC 16ML11 ^{*(1)}	S16SCML11	SHANDLES	RX2025GE1 or RX2031J long endurance tool

(1) loose contact

*endurance of SHANDLES and Head tools = 48,000 cycles

Contact size	Part number	Tool with separate locator		Extraction tools
		Hand tool	Positioner + locator setting	
#12 Ø 0.094" (2.4)	82911457N* / 82911456*	M317	VGE10077A 1/2	51060210924
	82911459N* / 82911458*	M317	VGE10077A 2	51060210924
	82911461N* / 82911460*	M317	VGE10077A 2	51060210924
	82911463N* / 82911462*	M317	VGE10077A 3	51060210924
	82911465N* / 82911464*	M317	VGE10077A 3	51060210924
	82911467N* / 82911466*	M317	VGE10077A 4	51060210924
#8 Ø 0.141" (3.6)	82913601A / 82913600A	M317	VGE10078A 3	51060210936
	82913603A / 82913602A	M317	VGE10078A 3	51060210936
	82913605A / 82913604A	M317	VGE10078A 4	51060210936
	82913607A / 82913606A	M317	VGE10078A 5	51060210936
	82913609A / 82913608A	M317	VGE10078A 6/7	51060210936

* see Page 126 for plating options and other contact details

Crimping tools for specific contacts (First mate, last break contacts)

Contact size	Part number*	Hand tools (SHANDLES) Head	Tool with separate locator		Extraction tools
			Hand tool	Positioner + locator setting	
#16 Ø 0.094" (1.6) Longer RM contact	RM28M1GE1K	S16RCM20	MH860	MH86186 4/6	RX2025GE1 or RX2031J long endurance tool
	RM24M9GE1K	S16RCM20	MH860	MH86186 5/6	RX2025GE1 or RX2031J long endurance tool
	RM16M23GE1K RM20M12GE1K	S16RCM16	MH860	MH86186 6/8	RX2025GE1 or RX2031J long endurance tool
	RM14M30GE1K	S16RCM14	M317	UH25 3	RX2025GE1 or RX2031J long endurance tool
	RC28M1GE7K	S16RCM20	MH860	MH86164G 4/6	RX2025GE1 or RX2031J long endurance tool
#16 Ø 0.094" (1.6) Shorter RC contact	RC24M9GE7K	S16RCM20	MH860	MH86164G 5/6	RX2025GE1 or RX2031J long endurance tool
	RC20M13GE7K RC20M12GE7K	S16RCM20	MH860	MH86164G 5/7	RX2025GE1 or RX2031J long endurance tool
	RC16M23GE7K	S16RCM16	MH860	MH86164G 6/8	RX2025GE1 or RX2031J long endurance tool
	RC14M30GE7K	S16RCM14	M317	UH25 3	RX2025GE1 or RX2031J long endurance tool

* see Page 129 for plating options and other contact details

Coaxial contacts

Please consult us.

M20S-1J crimp tool

Contact part number					M20S-1J			
Contact size	Pin	Socket	Cable type	Notes	Die	Stop bushing	Die kit (die + stop bushing)	PG check-gauge for die
#16 (Ø 1.6mm)	RM28M1*	RC28M1*	AWG 30-28	N/A	S-9K 1	SL-40K	N/A	PG-246-1K
	RM24M9*	RC24M9*	AWG 24	N/A	S-9K 1	SL-40K	N/A	PG-246-1K
	RM24M9*	RCS24M9*	AWG 24	N/A	S-10K	SL-40K	N/A	PG-246K
	RM20M14*	RC20M14*	AWG 22-20	N/A	S-10JK	SL-40K	N/A	PG-246K
	RM20M14*	RCS20M14*	AWG 22-20	N/A	S-10JK	SL-40K	N/A	PG-246K
	RM20M13*	RC20M13*	AWG 22-20	N/A	S-10K	SL-40K	N/A	PG-246K
	RM20M13*	RCS20M13*	AWG 22-20	N/A	S-10K	SL-40K	N/A	PG-246K
	RM20M12*	RC20M12*	AWG 22-20	N/A	S-10K	SL-40K	N/A	PG-246K
	RM20M12*	RCS20M12*	AWG 22-20	N/A	S-10K	SL-40K	N/A	PG-246K
	RM16M23*	RC16M23*	AWG 20-16	N/A	S-3D1K	SL-39K	N/A	PG-214K
	RM16M23*	RCS16M23*	AWG 20-16	N/A	S-3D1K	SL-40K	N/A	PG-214K
	RM14M50*	RC14M50*	AWG 16-14	N/A	S-3-14K	SL-40K	N/A	PG-246-2K
	RM14M50*	RCS14M50*	AWG 16-14	N/A	S-3-14K	SL-40K	N/A	PG-246-2K
	RM14M30*	RC14M30*	AWG 14	N/A	N/A			
	RMDXK-1JG, (S)YOC-074J RFD26L-1D28	RCDXK-1JG ((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28)	RG161/U, RG179B/U, RG187A/U	INNER CONTACT (RFD26L-1D28/((S)RM-D26L-1JD28,)	S-23D2	SL-46D2K	N/A	PG-266
	RMDX60-2D28) RMDXK-1JG, (S)YOC-074J RFD26L-1D28	RCDXK-1JG ((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28)	RG161/U, RG179B/U, RG187A/U	OUTER CONTACT (RM-DX602D28/RCDX602D28)	S-68J	SL-92K	N/A	PG-297
	RMDX60-2D28) RMDXK-1JG, (S)YOC-074J RFD26L-1D28	RCDXK-1JG ((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28)	RG174/U, RG188A/U	INNER CONTACT (RFD26L-1D28/((S)RM-D26L-1JD28,)	S-26D2	SL-46D2K	N/A	N/A
	RMDX60-2D28) RMDXK-1JG, (S)YOC-074J RFD26L-1D28	RCDXK-1JG ((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28)	RG174/U, RG188A/U	OUTER CONTACT (RM-DX602D28/RCDX602D28)	S-68J	SL-92K	N/A	PG-297
	RMDXK-10 ((S)YOC-074J, RFD26L-1D28, RMDX60-2D28, RMDXB055-3)	RCDXK-1((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28, RCDXB055-1)	RG178B/U, RG196A/U	INNER CONTACT (RFD26L-1D28/((S)RM-D26L-1JD28,)	S-23D2	SL-46D2K	N/A	PG-266
		RCDXK-1((S)RM-D26L-1JD28, (S)YOC-074J, RCDX60-2D28, RCDXB055-1)	RG178B/U, RG196A/U	OUTER CONTACT (RM-DX602D28/RCDX602D28)	S-68J	SL-92K	N/A	PG-297
	RMDXK-J20	RCDXK-J2	#26 twist pair 2-7/0.16, #24 twist pair 2-7/0.2, 2-1/0.5	INNER CONTACT	S-26D2	SL-46D2K	N/A	N/A
	RMDXK-J20	RCDXK-J2	#26 twist pair 2-7/0.16, #24 twist pair 2-7/0.2, 2-1/0.5	OUTER CONTACT	S-68J	SL-92K	N/A	PG-297
	RMDX6032D28	RCDX6032D28	see Page 122	MONOCRIMP	S-80J	SL-105K	N/A	N/A
	RMDX6036D28	RMDX6036D28	see Page 122	MONOCRIMP	S-80J	SL-105K	N/A	N/A
	RMDXK10D28	RCDXK1D28	RG161U, RG179, RG187U, RG178A/U, RG196U	INNER CONTACT	S-23D2	SL-46D2K	N/A	N/A
	RMDXK10D28	RCDXK1D28	RG161U, RG179, RG187U, RG178A/U, RG196U	OUTER CONTACT	S-22-1J	SL-47-1J	N/A	N/A
	RMDXK10D28	RCDXK1D28	RG188/U, RG174/U	INNER CONTACT	S-26D2	SL-46D2K	N/A	N/A
	RMDXK10D28	RCDXK1D28	RG188/U, RG174/U	OUTER CONTACT	S-22-1J	SL-47-1J	N/A	N/A
#12 (Ø2.4mm)	82911459N*	82911458*	AWG 20	N/A	N/A		S8291-2AKIT	PG-8291-2K
	82911461N*	82911460*	AWG 18	N/A	N/A		S8291-2AKIT	PG-8291-2K
	82911463N*	82911462*	AWG 16	N/A	N/A		S8291-3AKIT	PG-8291-3K
	82911465N*	82911464*	AWG 14	N/A	N/A		S8291-3AKIT	PG-8291-3K
	82911467N*	82911466*	AWG 12	N/A	N/A		S8291-4AKIT	PG-8291-4K
	82911467N*	82911466*	AWG 12	N/A	N/A		S8291-4AKIT	PG-8291-4K
#8 (Ø3.6mm)	82913601A	82913600A	AWG 16	N/A	N/A		S8291-3BKIT	PG-8291-3K
	82913603A	82913602A	AWG 14	N/A	N/A		S8291-3BKIT	PG-8291-3K
	82913605A	82913604A	AWG 12	N/A	N/A		S8291-4BKIT	PG-8291-4K
	82913607A	82913606A	AWG 10	N/A	N/A		S8291-5BKIT	PG-8291-5K

1. When crimping RC/RCS/RM24-9* if the insulator diameter is smaller than 1.4mm, use S-9 or S-9K

Automatic crimping tools

Contact Mecal for semi-automatic production tools.

Mecal sales network:

www.mecal.net



Min Applicator



Stripper



Presses

Extraction tool



RX20D44



51060210924



RX2031J



RX2025GE1



51060210936

Contact size	Part number
#20	RX20D44
#16	RX2025GE1
#16 Long endurance tool	RX2031J
#12	51060210924
#8	51060210936

Contact extraction instruction



Place the tool into the cavity from front face of the connector, push on the handle, then remove the contact.

Wire stripping crimp version

Machined contact



Contact size	Part number		Stripping length L	
	Male	Female	inch	mm
#20 Ø 0.039" (1)	RM24W3- / RM20W3- RM18W3-	RC24W3- / RC20W3- RC18W3-	0.188"	4.8
#16 Ø 0.062" (1.6)	RM28M1- / RM24M9- RM20M13- / RM20M12-	RC28M1- / RC24M9- RC20M13- / RC20M12-	0.188"	4.8
	RM16M23- / RM14M30-	RC16M23- / RC14M30-	0.279"	7.1
#8 Ø 0.141" (3.6)	82913601- / 82913603- 82913605- / 82913607-82913609-	82913600- / 82913602-82913604- / 82913606- 82913608-	0.255" to 0.295"	6.5 to 7.5

Stamped and formed with insulation support



Contact size	Part number		Stripping length L	
	Male	Female	inch	mm
#20 Ø 0.039" (1)	SM24W3- / SM24WL3- SM20W3- / SM20WL3-	SC24W3- / SC24WL3- SC20W3- / SC20WL3-	0.157"	4
#16 Ø 0.062" (1.6)	SM24M1- / SM24ML1- SM20M1- / SM20ML1-	SC24M1- / SC24ML1- SC20M1- / SC20ML1-	0.157"	4
	SM16M11- / SM16ML11-	SC16M11- / SC16ML11-	0.183"	4.65

Stamped and formed without insulation support



Contact size	Part number		Stripping length L	
	Male	Female	inch	mm
#16 Ø 0.062" (1.6)	SM16M1- / SM16ML1-	SC16M1- / SC16ML1-	0.250"	6.35
	SM14M1- / SM14ML1-	SC14M1- / SC14ML1-	0.250"	6.35

Power contacts



Contact size	Part number		Stripping length L	
	Male	Female	inch	mm
#12 Ø 0.094" (2.4)	82911457- / 82911459-82911461- / 82911463-82911465- / 82911467-	82911456- / 82911458-82911460- / 82911462-82911464- / 82911466-	0.275" to 0.314"	7 to 8
#8 Ø 0.141" (3.6)	82913601- / 82913603-82913605- / 82913607-82913609-	82913600- / 82913602-82913604- / 82913606-82913608-	0.255" to 0.295"	6.5 to 7.5

Note: See Page 126 for plating options and other contact details

Wire stripping solder and screw versions

Solder contact delivered with connector



Contact size	Stripping length L	
	inch	mm
#16 / Ø 0.062" (1.6) and #20 / Ø 0.039" (1)	0.196"	5

Screw contact delivered with connector



Contact size	Stripping length L	
	inch	mm
#16 / Ø 0.062" (1.6)	0.228"	5.8


Dimensions in inches (millimeters)

Crimping


One of the key factors which affects the performance of a connector is the way contacts are terminated. Crimped connections are nowadays seen as the best solution to ensure quality throughout the lifetime of the product.



Machined contact



Stamped and formed contact



Active contact part	Contact type	Die location on heads	Wire section range	Section inch ²	mm ²	Tensile straight test (min)	Height W ±0.002" (±0.075)	mm	Width W ±0.002" (±0.075)	mm	Tooling head part number
Machined contacts size #20 Ø 0.039" (1)	RM24W3K RC24W3K	26/24	26 AWG	0.004" min	0.12 min	15 N	0.037"	0.95	0.05"	1.27	S20RCM
		26/24	24 AWG	0.009" max	0.25 max	32 N	0.037"	0.95	0.05"	1.27	S20RCM
	RM20W3K RC20W3K	22/20	22 AWG	0.012" min	0.32 min	40 N	0.049"	1.26	0.070"	1.78	S20RCM
			20 AWG	0.019" max	0.50 max	60 N	0.049"	1.26	0.070"	1.78	S20RCM
	RM18W3K RC18W3K	20/18	20 AWG	0.019" max	0.50 max	60 N	0.053"	1.35	0.073"	1.86	S20RCM
			18 AWG	0.032" max	0.82 max	90 N	0.053"	1.35	0.073"	1.86	S20RCM
S and F contacts size #20 Ø 0.039" (1)	SM24WL3TK6* SC24WL3TK6*	26/24	26 AWG	0.004" min	0.12 min	15 N	0.031"	0.80	0.058"	1.49	S20SCM20
		26/24	24 AWG	0.009" max	0.25 max	32 N	0.031"	0.80	0.058"	1.49	S20SCM20
	SM20WL3TK6* SC20WL3TK6*	22/20	22 AWG	0.012" min	0.32 min	40 N	0.039"	1.01	0.060"	1.53	S20SCM20
		22/20	20 AWG	0.019" max	0.50 max	60 N	0.039"	1.01	0.060"	1.53	S20SCM20
Machined contacts size #16 Ø 0.062" (1.6)	RM28M1K* RC28M1K*	30/28	30 AWG	0.002" min	0.05 min	11 N	0.044"	1.14	0.055"	1.41	S16RCM20
		30/28	28 AWG	0.003" max	0.08 max	6 N	0.044"	1.14	0.055"	1.41	S16RCM20
	RM24M9K* RC24M9K*	26/24	26 AWG	0.004" min	0.12 min	15 N	0.045"	1.15	0.055"	1.41	S16RCM20
		26/24	24 AWG	0.009" max	0.25 max	32 N	0.045"	1.15	0.055"	1.41	S16RCM20
	RM20M13K* RC20M13K*	22/20	22 AWG	0.012" min	0.32 min	40 N	0.049"	1.26	0.069"	1.76	S16RCM20
		22/20	20 AWG	0.019" max	0.50 max	60 N	0.049"	1.26	0.069"	1.76	S16RCM20
	RM20M12K* RC20M12K*	22/20	22 AWG	0.012" min	0.32 min	40 N	0.049"	1.26	0.069"	1.76	S16RCM20
		22/20	20 AWG	0.019" max	0.50 max	60 N	0.049"	1.26	0.069"	1.76	S16RCM20
	RM16M23K* RC16M23K*	18	18 AWG	0.032" max	0.82 max	90 N	0.070"	1.80	0.089"	2.28	S16RCM16
		16	16 AWG	0.059" max	1.50 max	150 N	0.077"	1.96	0.095"	2.43	S16RCM16
	RM14M30K* RC14M30K*	16	16 AWG	0.059" min	1.50 min	150 N	0.082"	2.10	0.105"	2.68	S16RCM14
		14	14 AWG	0.098" min	2.50 min	230 N	2.3	2.30	0.109"	2.78	S16RCM14
S and F contacts size #16 Ø 0.062" (1.6)	SM24ML1TK6* SC24ML1TK6*	26/24	26 AWG	0.004" min	0.12 min	15 N	0.033"	0.84	0.059"	1.50	S16SCM20
		26/24	24 AWG	0.009" max	0.25 max	32 N	0.033"	0.84	0.059"	1.50	S16SCM20
	SM20ML1TK6* SC20ML1TK6*	22/20	22 AWG	0.012" min	0.32 min	40 N	0.040"	1.02	0.060"	1.54	S16SCM20
		22/20	20 AWG	0.019" max	0.50 max	60 N	0.040"	1.02	0.060"	1.54	S16SCM20
	SM16ML11TK6* SC16ML11TK6*	18	18 AWG	0.032" min	0.82 min	90 N	0.051"	1.32	0.082"	2.09	S16SCML11
		16	16 AWG	0.059" max	1.50 max	150 N	0.053"	1.36	0.082"	2.10	S16SCML11
	SM16ML1TK6* SC16ML1TK6*	18	18 AWG	0.032" min	0.82 min	90 N	0.058"	1.149	0.079"	2.02	S16SCML1
		16	16 AWG	0.059" max	1.50 max	150 N	0.066"	1.70	0.080"	2.05	S16SCML1
	SM14ML1TK6* SC14ML1TK6*	14	14 AWG	0.098" max	2.50 max	230 N	0.070"	1.79	0.101"	2.58	S16SCML1

* example of plating, for other plating see Page 126

Note: Assembly operations mentioned above shall not interfere with or be in contradiction with the IPC-WHMA-A-620B

Dimensions in inches (millimeters)

Souriau UTSX series

Handle and interchangeable heads for crimp contacts

Crimping tooling




1) Fully close then release the tool, keep it open.
Open the two pins.



2) Choose the adapter head (sold separately). Keep vertical
and slide it into the handle until the mechanical stop.



3) Close the two pins simultaneously to maintain the head.

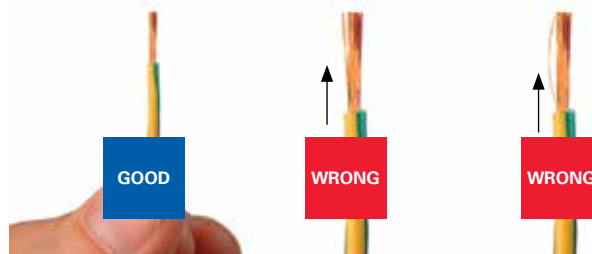

4) Strip the cable properly by checking the recommended size
in the catalog on Page 139.




5) Place conductors, with no deterioration, in the contact
bucket. All strands to be located in the crimp bucket.



6) Position the contact in the bottom of the tool by checking
its orientation. Maintain the wire in position.



7) Tighten the handles to the end of the mechanism (max 175 N).
After handles are opened, extract the contact.

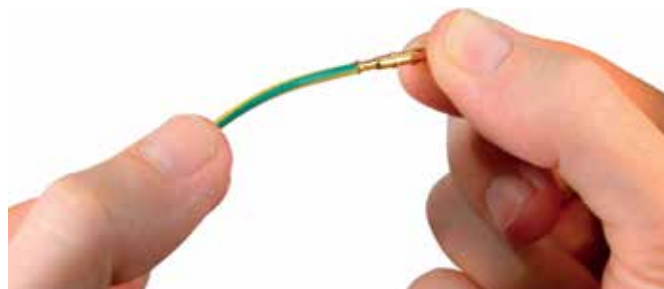


8) Control the quality of crimping (see Page 140).


Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

Mated connector lengths


UTSX7 + UTSX6JC

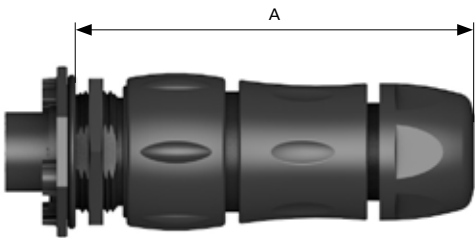

UTSX0 + UTSX6JC

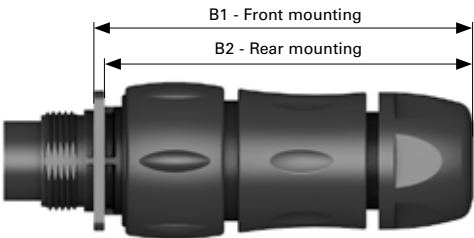

UTSX1JC + UTSX6JC

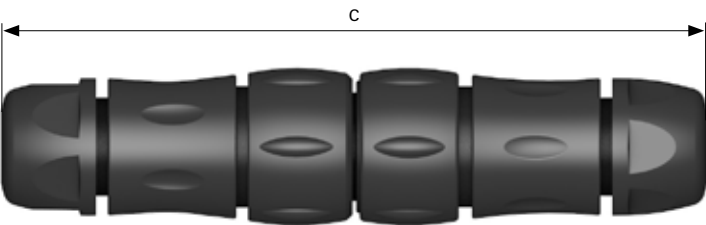


Shell size	UTSX7 + UTSX-6JC A max		UTSX0 + UTSX-6JC B1 max		B2 max		UTSX1JC + UTSX6JC C max	
	inch	mm	inch	mm	inch	mm	inch	mm
10	2.992"	74	2.836"	72	2.736"	69.5	5.196"	132
12	3.110"	79	2.952"	75	2.874"	73	5.433"	138
14	3.366"	85.5	3.208"	81.5	3.110"	79	5.925"	150.5


UTSX0 or UTSX0JC assembly (mounting suggestion)

- Strip wires, crimp or solder contacts (see **Pages 140 and 141**)
- Insert contacts into connector cavities (insert manually or use tool RTM205 crimp contacts)
- Place receptacle in the panel cut-out
- Secure receptacle with screws (not supplied)
- Tighten screws: M2.5 (recommended torque: see table below)
- Warning: to prevent any mating issue with the plug counterpart, take into account the following dimensions of screw heads and panel thickness
- For complete sealing of the system use optional gasket and sealed screw solution (not sold by Eaton).


Front mounting

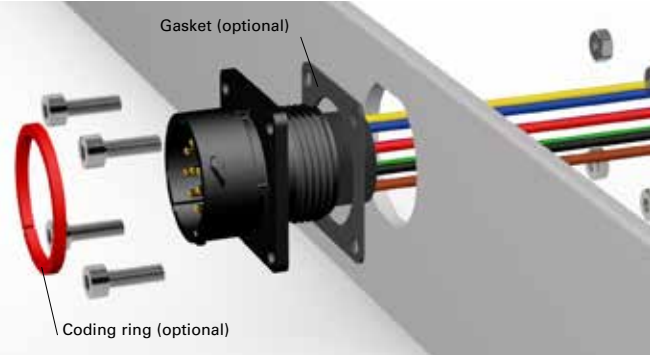


A large screw head diameter may be limit the height of the screw head: >Ø 0,157"x0,078" (4.5x2.5) max

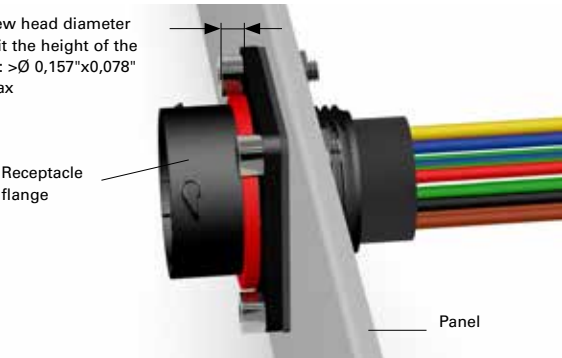

Rear mounting


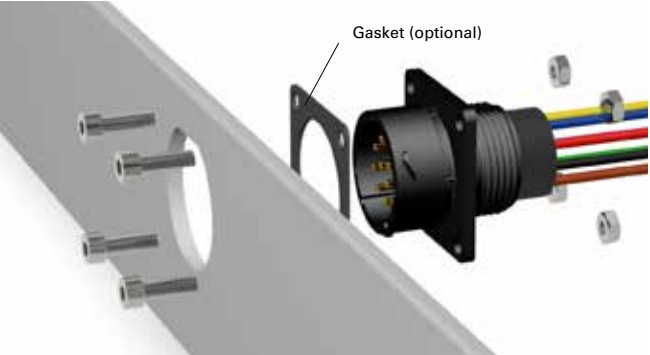


A large screw head diameter may be limit the height of the screw head: >Ø 0,157"x0,078" (4.5x2.5) max

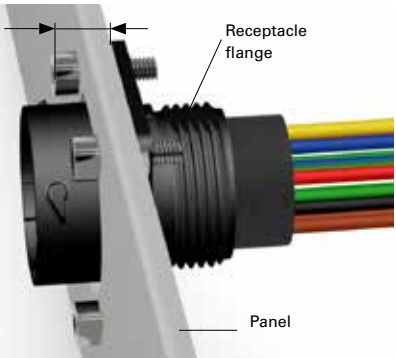

Shell size	Screw tightening torque (Nm)
10	0.30/0.40
12	0.30/0.40
14	0.30/0.40


UTSX0JC rear mounting

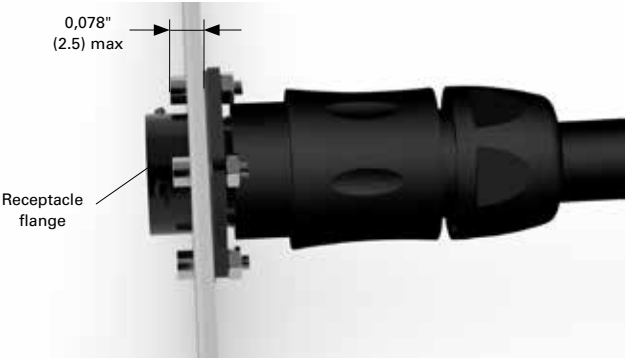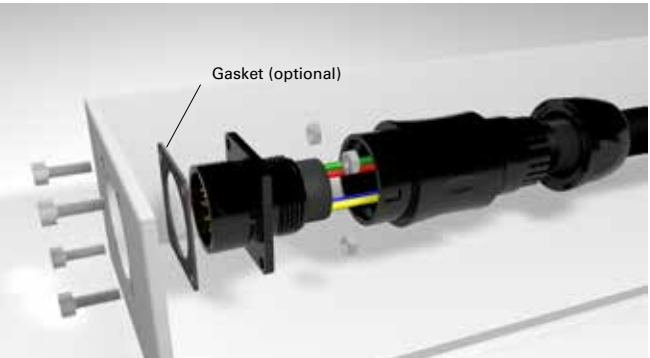

Dimensions in inches (millimeters)

UTSX7 assembly (mounting suggestion)


- Strip wires and crimp contacts (see **Pages 140 and 141**)
- Insert contacts into connector cavities (insert manually or use tool RTM205 crimp contacts)
- Seat o-ring, place receptacle in the panel cut-out
- Tighten jam nut

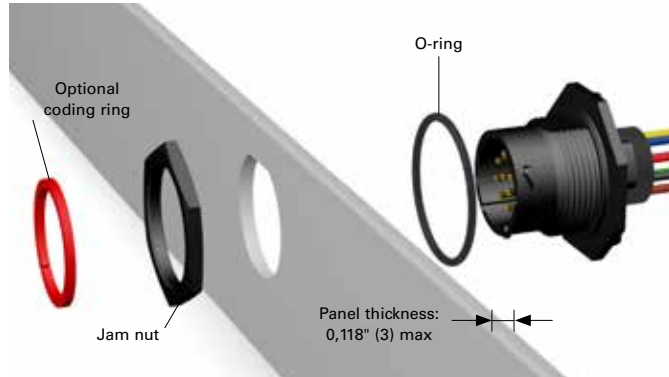Crimp or solder version

Shell size	Jam nut torque (Nm) max	Exterior jam nut dim.		Ø Wire Standard version max		Discrete wire sealing	
		inch	mm	inch	mm	inch	mm
10	3	0.874"	20.2	1.125"	3.2	From 0.066"	From 1.7 to
12	4	1.062"	27.0	1.125"	3.2	to 0.118"	3.0
14	5	1.185"	30.1	1.125"	3.2		



UTSX0JC, UTSX1JC or UTSX6JC assembly: crimp version

- Slide accessories onto the cable

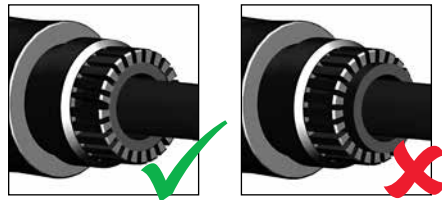

Make sure the seal is positioned as shown.


- Mate the plug with a corresponding counter part
- Strip external cable jacket
- Strip wires and crimp contacts (see **Pages 140 and 141**)
- Insert contacts into connector cavities (insert manually or use tool RTM205)
- Tighten adapter with plug UTSX6 or receptacle UTSX1, choose right seal (waste the other seal)
- Tighten the nut to rear of either UTSX1 or UTSX6 (recommended torque values to be applied according to table below)
- Caution: only one of the two gaskets included should be used!

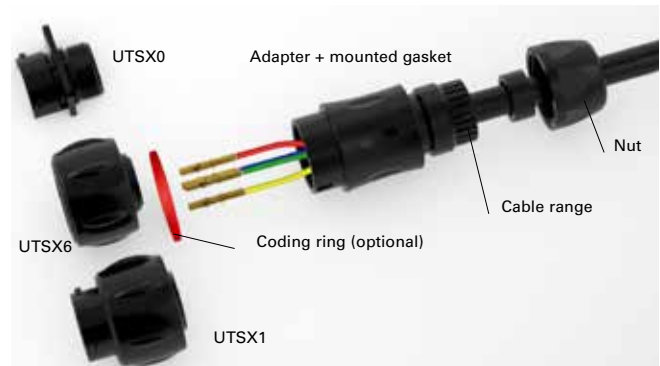**Cable ranges**

Shell size	Recommended jacket strip length				Adapter tightening torque (Nm)	Nut tightening torque (Nm)	Ø Cable range Standard seal	Ø Cable range Reducing seal	Ø Wire	
	Male inch	Male mm	Female inch	Female mm			inch	mm	inch	mm
10	0.826"	21	1.141"	29	1.5	1	0.098"/0.314"	2.5/8.0	0.059"/0.196"	1.5/5.0
12	0.984"	25	1.299"	33	2.5	2	0.196"/0.472"	5.0/12.0	0.118"/0.354"	3.0/9.0
14	1.141"	29	1.417"	36	3	2.5	0.275"/0.551"	7.0/14.0	0.196"/0.472"	5.0/12.0


UTSX6JC assembly: solder version

- Slide accessories onto the cable

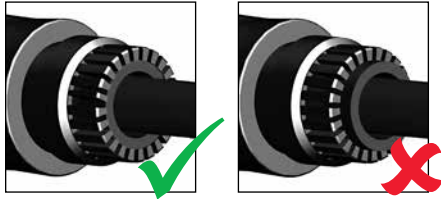


Make sure the seal is positioned as shown.

- Mate the plug with a corresponding receptacle
- Strip external cable jacket (see **Pages 140 and 141**)
- Solder contacts
- Tighten adapter with plug, choose right seal (waste the other seal)
- Tighten the nut to rear of either UTSX6 (recommended torque values to be applied according table to the right)
- Caution: only one of the two gaskets included should be used!

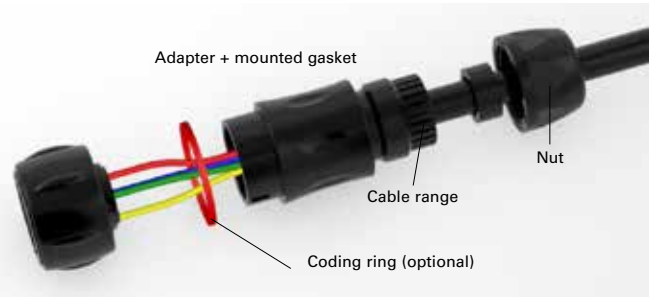


Cable ranges




Shell size	Recommended jacket strip length Male		Adapter tightening torque (Nm)	Nut tightening torque (Nm)	Ø Cable range Standard seal		Ø Cable range Reducing seal		Ø Wire	
	inch	mm			inch	mm	inch	mm	inch	mm
10	0.826"	21	1.5	1	0.098"/0.314"	2.5/8.0	0.059"/0.196"	1.5/5.0	From 0.066"	From 1.7
12	0.984"	25	2.5	2	0.196"/0.472"	5.0/12.0	0.118"/0.354"	3.0/9.0	to 0.118"	to 3.0
14	1.141"	29	3	2.5	0.275"/0.551"	7.0/14.0	0.196"/0.472"	5.0/12.0		

UTSX1GJC or UTSX6GJC assembly

- Slide accessories onto the cable (make sure to keep compression ring on the grommet)
- Strip external cable jacket
- Strip wires and crimp contacts (see **Pages 140 and 141**)
- Insert first contact into the grommet (first contact in cavity A, no tool is required). Then insert the contact in the connector cavity A (insert manually or use tool RTM205)
- Place the grommet and compression ring on the insulator
- Insert the other contacts
- Tighten adapter with plug UTSX6 or receptacle UTSX1, choose correct seal
- Tighten the nut to rear of either UTSX1 or UTSX6 (recommended torque values to be applied according to the table right).

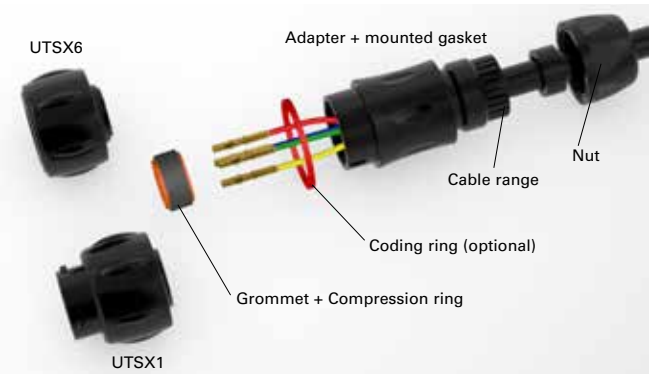

Cable ranges



Shell size	Recommended jacket strip length				Adapter tightening torque (Nm)	Nut tightening torque (Nm)	Ø Cable range Standard seal		Ø Cable range Reducing seal		Ø Wire	
	Male inch	Male mm	Female inch	Female mm			inch	mm	inch	mm	inch	mm
10	0.826"	21	1.141"	29	1.5	1	0.098"/0.314"	2.5/8.0	0.059"/0.196"	1.5/5.0	From 0.066"	From 1.7
12	0.984"	25	1.299"	33	2.5	2	0.196"/0.472"	5.0/12.0	0.118"/0.354"	3.0/9.0	to 0.118"	to 3.0
14	1.141"	29	1.417"	36	3	2.5	0.275"/0.551"	7.0/14.0	0.196"/0.472"	5.0/12.0		

UTSX coupling procedure

The pictures below provides step by step instructions on how to mate a plug and receptacle connector in order to avoid damaging any of the contacts.




1 - Identify the primary key of each connector.




2 - Align the primary keys of the connectors.



3 - Non correct positioning:

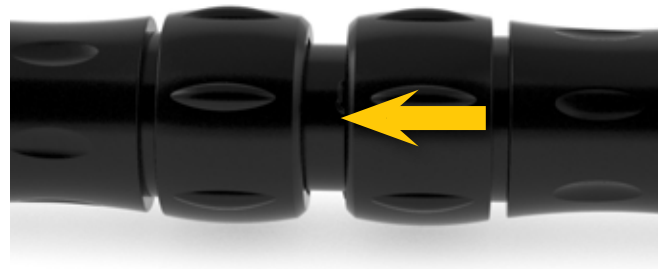

4 - Offer the plug to the receptacle.

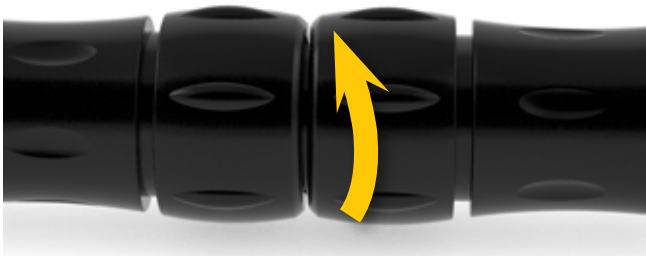

5 - Turn coupling ring until you hear a 'click'



6 - Example of installation

Fastening of cable: In order to avoid any mechanical stress on the connection, cable should be clamp closed to the connector in such a way there is no bending or traction applying on the connector.

Current carrying capacity

The current carrying capacity of a connector is limited by the thermal properties of materials used in its construction. The amount of current that can be handled depends on the size of cable used, the ambient temperature and the heat that is generated inside the connector. Part 3 of the IEC 60512 standard determines through a derating curve, the maximum current permissible, which varies from one layout to another (Fig.1 and Fig.2). Wire size plays an important role in dissipating heat and avoiding overheating (Fig.1 and Fig.3).

Please note that the curve should be adjusted when dealing with potential hot spots, which can occur as a result of unequal loading of current across a number of contacts. As a general rule, it is best to avoid placing power handling contacts in the middle of the connector. Try to locate them towards the edge where heat can be dissipated more effectively. Eventually you should find a level which represents the permissible operating range.

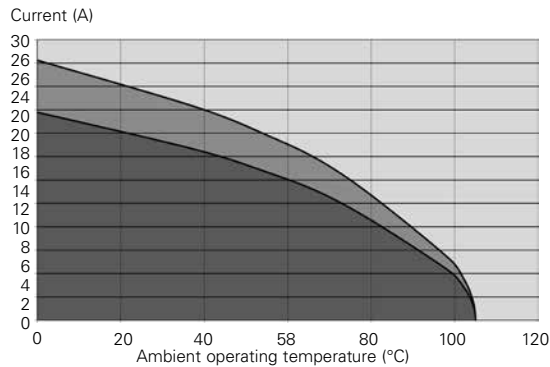


Fig.1: UTSX 12-4 – 16 AWG

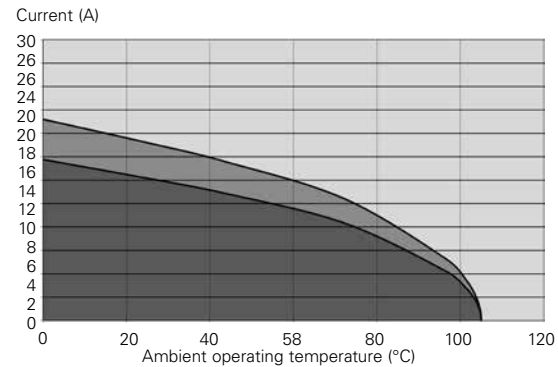


Fig.2: UTSX 12-8 – 16 AWG


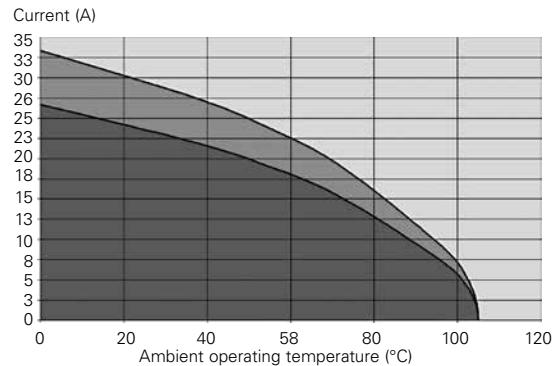


Fig.3: UTSX 12-4 – 20 AWG



The rated current is defined as uninterrupted continuous current that a connector can take when all contacts are energized simultaneously without exceeding the maximum limit of temperature. The earth contact is never loaded.

UV resistance

Plastics can be susceptible to extreme degradation over time. The UTSX series is made with (f1) material according to UL746C. The UTSX material withstand a 1,000 h UV exposure according ISO4892 without significant color variation, cracking or variation of mechanical properties.

Protection provided by an enclosure

For safety reasons, electrical equipment needs to be protected against outside influences. The basis for the determination is the standard IEC 60529. IP is a coding system that provides information regarding the accessibility of live parts against ingress of water or other foreign bodies.

First digit (foreign bodies protection)

↓

Code letters (international Protection) → IP 6 8 ← Second digit (water protection)

1st digit	Degree of protection	2nd digit	Degree of protection
0	No protection against accidental contact. No protection against solid foreign bodies.	0	No protection against water.
1	Protection against contact with any large area by hand and against large solid foreign bodies with a diameter bigger than 1.889" (48).	1	Drip-proof. Protection against vertical water drips.
2	Protection against contact with the fingers. Protection against solid foreign bodies with a diameter bigger than 0.472" (12).	2	Drip-proof. Protection against water drips up to a 15° angle.
3	Protection against tools, wires or similar objects with a diameter bigger than 0.078" (2.5). Protection against small solid bodies with a diameter bigger than 0.078" (2.5).	3	Spray-proof. Protection against diagonal water drips up to a 60° angle.
4	Same as 3 however diameter is bigger than 0.039" (1).	4	Splash-proof. Protection against splashed water from all directions.
5	Full protection against contact. Protection against interior injurious dust deposits.	5	Hose-proof. Protection against water (out of a nozzle) from all directions.
6	Total protection against contact. Protection against penetration of dust.	6	Protection against powerful water jets .
		7	Protection against temporary immersions.
		8	Protection against water pressure. Pressure and immersion time to be specified by supplier.
			In addition to the IEC 60529 we conjointly use the ISO 20653 for the implementation of IPx9K testing:
		9K	High pressure hose-proof. Protection against high pressure water (out of a nozzle) from all directions.

UTSX offers high sealing: IP68/69K even in dynamic situations.

Ethernet basics

To understand Ethernet theory, a functional comparison to a busy city with highways, buildings and cars is often used. The table below provides the correlation between the different components/pieces/links that encompass Ethernet network connectivity, and the larger scale infrastructure of a metropolitan city.

City	Buildings	Roads	Cars	Tolls	Bridges	Traffic laws
The network itself	End equipment, PC, server, etc.	Ethernet cabling	Data packets, datagrams, bits, bytes, etc.	Firewalls	Connectors	Protocol Communication specifications

Ethernet is a widely used communications protocol that is used to transmit data packets (datagrams) between network devices. Imagine a highway in a large metropolitan area six lanes wide at rush hour. The vehicles on the highway need rules to follow so that they get to their destination without crashing into each other. In an Ethernet network link, there could be 100 million bits of information transmitted in one second. In the Ethernet standard, there exist rules to govern packet structure, transmission requirements, error correction, communication with end equipment, etc.

Ethernet connectors

To understand the differences between 100Mhz, 100 Base TX and Cat5e/Cat6, the comparison to the city is helpful.

- 100Mhz is a measurement of frequency for the signal, comparable to the speed limit on a highway.
- 100BaseTX (or Fast Ethernet) is an Ethernet link standard and identifies available link bandwidth. The bandwidth is measured in units of MBits/S (megabits per second), comparable to the number of cars that pass a point in one second.
- Cat5e/Cat6 are an EIA/TIA standard for performance and physical characteristics for cables and connectors, comparable to performance specifications of the car and highway.

Specifying Ethernet connectors and contacts


In connectors and cables, Fast Ethernet uses two pairs, one for transmit and one for receive. This way data traffic can flow in both directions simultaneously. To carry 100Mb/s data signals, 100BaseTX or Fast Ethernet, it is recommended to use Cat5e connectors as well as Cat5e cables with the support of a 100MHz signal. However, a 100Mb/s signal can be transmitted in certain conditions: short distance, only one connector, lower frequency, and so does not necessarily need to be Cat5e rated.

Ethernet twisted pairs carry a symmetrical (balanced) signal. With coax contacts, the inner core will be shield, but not the other core. This will result in an unbalanced signal due to electromagnetic interferences. Coax contacts will not work correctly and are not recommended.

Quadrax contacts are used in railway applications because of the use of quad cables. In this specific industry, the standard Ethernet twisted pair cables cannot be used as they are too thin and usually solid, not stranded. In other industries, UTP (Unshielded Twisted Pair) cables are widely used. Quadrax contacts are not designed to terminate UTP cables and are not recommended.

Standard offering


Standard solutions



106* - 10E6/10D6
4.5A 250V 6A 250V
6 contacts #20 Ø
0.039" (1)

UTSX size 10, 6 contacts

- 1 (Pair 1) = A
- 2 (Pair 1) = B
- 3 (Pair 2) = E
- 4 (Pair 2) = D



1210 - 12E10/12D10
4.5A 250V 10 contacts
#20 Ø 0.039" (1)


UTSX size 12, 10 contacts

- 1 (Pair 1) = C
- 2 (Pair 1) = B
- 3 (Pair 2) = G
- 4 (Pair 2) = H

Shielding continuity done in cavity CandF.

Note: *Shielding can be replaced by DC power.

UTSX 14-19 used for Ethernet



- Twisted pairs
- GND

The UTSX layout 14-19 has been evaluated and approved for use as an Ethernet connection in the following configuration:

- Using Cat6A cables, with 9m of cable between each connector
- The cable was terminated as pictured


Based on the test results, the insertion loss, return loss, NEXT and ACR-N pass the Channel Class Ea Ethernet requirements, which defines the maximum data rate as 10 Gbps.

Please note, the results pass the 10 Gbps data rate, but have only been tested with a distance of 9m, and can be validated for up to 20m.


Appendix A: Discrimination/Keying methods

The UTSX series has layouts with discrimination keys, which help avoid mismatching when operators mate the connectors.

This safety feature is particularly important when similar connectors are placed next to each other. Mismatching connectors can lead to serious problems including system failures and even physical injury.

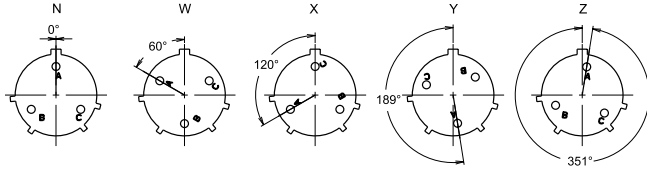

Note: Insert rotated in body (viewed from front face of female insert)

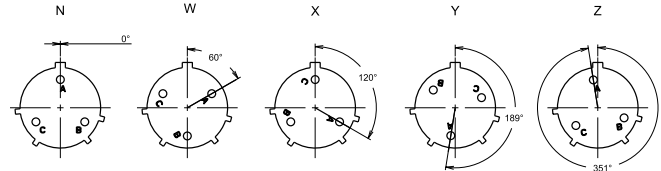

Note: Insert rotated in body (viewed from front face of male insert)

Connectors with rotated inserts can be ordered by adding the suffix W, X, Y or Z to the standard part number.

e.g. **UTSX6JC104S** (N key) → **UTSX6JC104SW** (W key)

Consult us for overmolded harnesses.

Shell size	Layout	Discrimination keys degrees			
		W	X	Y	Z
10	102W2/103	—	—	—	—
	104	45°	—	—	—
	103W3	—	—	—	—
	106 10E6/10D6	90°	—	—	—
	10E7/10D7	90°	—	—	—
	10E98/10D98	90°	180°	240°	270°
12	12E2/12D2	—	—	—	—
	12E3/12D3	—	—	180°	—
	124 12E4/12D4	—	—	—	—
	128	26°	—	—	—
	12E8/12D8	90°	112°	203°	292°
	1210	60°	155°	270°	295°
	12E10/12D10	60°	155°	270°	295°
14	12E14/12D14	45°	—	—	—
	14E5/14D5	40°	92°	184°	273°
	142G1	—	—	—	—
	147 14E7/14D7	—	—	—	—
	148	—	—	—	—
	1412	60°	—	—	—
	1492	49°	71°	145°	—
	14E12/14D12	43°	90°	—	—
	14E15/14D15	17°	110°	155°	234°
	14E18/14D18	15°	90°	180°	270°
	1419	30°	165°	315°	—
	14E19/14D19	30°	165°	315°	—

SMSPKE0: discrimination pin for male UTSX connectors (#16 contacts only)

An alternative method to prevent mismatches is to employ an SMSPKE0 dummy contact, which can be placed into an unoccupied #16 male contact cavity. This ensures that the UTSX male connector will only connect with a female counterpart that also has an empty contact slot in the corresponding position.



Connectors**Free hanging receptacle with cable gland**

UTSX1JC102W2P	36
UTSX1JC102W2S	36
UTSX1JC103P	18
UTSX1JC103S	18
UTSX1JC103W3P	50
UTSX1JC103W3S	50
UTSX1JC104P	41
UTSX1JC104S	41
UTSX1JC106P	56
UTSX1JC106S	56
UTSX1JC1210P	89
UTSX1JC1210S	89
UTSX1JC124P	31
UTSX1JC124PSCR	31
UTSX1JC124S	31
UTSX1JC124SSCR	31
UTSX1JC128P	74
UTSX1JC128S	74
UTSX1JC1412P	94
UTSX1JC1412S	94
UTSX1JC1419P	120
UTSX1JC1419S	120
UTSX1JC142G1P	23
UTSX1JC142G1S	23
UTSX1JC147P	65
UTSX1JC147PSCR	65
UTSX1JC147S	65
UTSX1JC147SSCR	65
UTSX1JC148P	83
UTSX1JC148S	83
UTSX1JC1492P	103
UTSX1JC1492S	103

Jam nut receptacle only

UTSX7102W2P	36
UTSX7102W2S	36
UTSX7103P	18
UTSX7103S	18
UTSX7103W3P	50
UTSX7103W3S	50
UTSX7104P	41
UTSX7104S	41
UTSX7106P	55
UTSX7106S	55
UTSX710D6P	55
UTSX710D6P32	55
UTSX710D6S	55
UTSX710D6S32	55
UTSX710D7P	70
UTSX710D7P32	70
UTSX710D7S	70
UTSX710D7S32	70
UTSX710D98P	61
UTSX710D98P32	61
UTSX710D98S	61
UTSX710D98S32	61
UTSX710E6P	55
UTSX710E6S	55
UTSX710E7P	70
UTSX710E7S	70
UTSX710E98P	61
UTSX710E98S	61
UTSX71210P	89
UTSX71210S	89

UTSX7124P	31
UTSX7124PSCR	31
UTSX7124S	31
UTSX7124SSCR	31
UTSX7128P	74
UTSX7128PSEK9	74
UTSX7128S	74
UTSX712D10P	89
UTSX712D10P32	89
UTSX712D10S	89
UTSX712D10S32	89
UTSX712D14P	108
UTSX712D14P32	108
UTSX712D14S	108
UTSX712D14S32	108
UTSX712D2P	14
UTSX712D2P32	14
UTSX712D2S	14
UTSX712D2S32	14
UTSX712D3P	27
UTSX712D3P32	27
UTSX712D3S	27
UTSX712D3S32	27
UTSX712D4P	31
UTSX712D4P32	31
UTSX712D4S	31
UTSX712D4S32	31
UTSX712D8P	79
UTSX712D8P32	79
UTSX712D8S	79
UTSX712D8S32	79
UTSX712E10P	89
UTSX712E10S	89
UTSX712E14P	108
UTSX712E14S	108
UTSX712E2P	14
UTSX712E2S	14
UTSX712E3P	27
UTSX712E3S	27
UTSX712E4P	31
UTSX712E4S	31
UTSX712E8P	79
UTSX712E8S	79
UTSX71412P	94
UTSX71412S	94
UTSX71419P	120
UTSX71419S	120
UTSX7142G1P	23
UTSX7142G1S	23
UTSX7147P	65
UTSX7147PSCR	65
UTSX7147S	65
UTSX7147SSCR	65
UTSX7148P	83
UTSX7148S	83
UTSX71492P	103
UTSX71492S	103
UTSX714D12P	99
UTSX714D12P32	99
UTSX714D12S	99
UTSX714D12S32	99
UTSX714D15P	112
UTSX714D15P32	112
UTSX714D15S	112
UTSX714D15S32	112
UTSX714D18P	116
UTSX714D18P32	116
UTSX714D18S	116

UTSX714D18S32	116
UTSX714D19P	120
UTSX714D19P32	120
UTSX714D19S	120
UTSX714D19S32	120
UTSX714D5P	46
UTSX714D5P32	46
UTSX714D5S	46
UTSX714D5S32	46
UTSX714D7P	65
UTSX714D7P32	65
UTSX714D7S	65
UTSX714D7S32	65
UTSX714E12P	99
UTSX714E12S	99
UTSX714E15P	112
UTSX714E15S	112
UTSX714E18P	116
UTSX714E18S	116
UTSX714E19P	120
UTSX714E19S	120
UTSX714E5P	46
UTSX714E5S	46
UTSX714E7P	65
UTSX714E7S	65

Plug only

UTSX6100W2P	36
UTSX6100W2S	36
UTSX6103P	18
UTSX6103S	18
UTSX6103W3P	50
UTSX6103W3S	50
UTSX6104P	41
UTSX6104S	41
UTSX6106P	56
UTSX6106S	56
UTSX610E6P	56
UTSX610E6S	56
UTSX610E7P	70
UTSX610E7S	70
UTSX610E98P	61
UTSX610E98S	61
UTSX61210P	89
UTSX61210S	89
UTSX6124P	31
UTSX6124S	31
UTSX6128P	83
UTSX6128S	83
UTSX612E10P	89
UTSX612E10S	89
UTSX612E14P	108
UTSX612E14S	108
UTSX612E2P	14
UTSX612E2S	14
UTSX612E3P	31
UTSX612E3S	31
UTSX612E4P	31
UTSX612E4S	31
UTSX612E8P	79
UTSX612E8S	79
UTSX61412P	83
UTSX61412S	83
UTSX61419P	120
UTSX61419S	120
UTSX6142G1P	23
UTSX6142G1S	23

UTSX6147P	65
UTSX6147S	65
UTSX6148P	83
UTSX6148S	83
UTSX61492P	103
UTSX61492S	103
UTSX614E12P	99
UTSX614E12S	99
UTSX614E15P	112
UTSX614E15S	112
UTSX614E18P	116
UTSX614E18S	116
UTSX614E19P	108
UTSX614E19S	108
UTSX614E5P	112
UTSX614E5S	112
UTSX614E7P	65
UTSX614E7S	65

Plug with cable gland

UTSX6JC102W2P	36
UTSX6JC102W2S	36
UTSX6JC103P	18
UTSX6JC103S	18
UTSX6JC103W3P	50
UTSX6JC103W3S	50
UTSX6JC104P	41
UTSX6JC104S	41
UTSX6JC106P	56
UTSX6JC106S	56
UTSX6JC10E6P	56
UTSX6JC10E6S	56
UTSX6JC10E7P	70
UTSX6JC10E7S	70
UTSX6JC10E98P	61
UTSX6JC10E98S	61
UTSX6JC1210P	89
UTSX6JC1210S	89
UTSX6JC124P	31
UTSX6JC124PSCR	31
UTSX6JC124S	31
UTSX6JC124SSCR	31
UTSX6JC128P	74
UTSX6JC128S	74
UTSX6JC12E10P	89
UTSX6JC12E10S	89
UTSX6JC12E14P	89
UTSX6JC12E14S	89
UTSX6JC12E2P	14
UTSX6JC12E2S	14
UTSX6JC12E3P	27
UTSX6JC12E3S	27
UTSX6JC12E4P	31
UTSX6JC12E4S	31
UTSX6JC12E8P	79
UTSX6JC12E8S	79
UTSX6JC1412P	83
UTSX6JC1412S	83
UTSX6JC1419P	108
UTSX6JC1419S	108
UTSX6JC142G1P	23
UTSX6JC142G1S	23
UTSX6JC147P	65
UTSX6JC147PSCR	65
UTSX6JC147S	65
UTSX6JC147SSCR	65
UTSX6JC148P	83

UTSX6JC148S.....	83
UTSX6JC1492P.....	103
UTSX6JC1492S.....	103
UTSX6JC14E12P.....	99
UTSX6JC14E12S.....	99
UTSX6JC14E15P.....	41
UTSX6JC14E15S.....	41
UTSX6JC14E18P.....	116
UTSX6JC14E18S.....	116
UTSX6JC14E19P.....	108
UTSX6JC14E19S.....	108
UTSX6JC14E5P.....	41
UTSX6JC14E5S.....	41
UTSX6JC14E7P.....	65
UTSX6JC14E7S.....	65

Square flange receptacle only

UTSX0102W2P.....	36
UTSX0102W2S.....	36
UTSX0103P.....	18
UTSX0103S.....	18
UTSX0103W3P.....	50
UTSX0103W3S.....	50
UTSX0104P.....	41
UTSX0104S.....	41
UTSX0106P.....	56
UTSX0106S.....	56
UTSX010D6P.....	56
UTSX010D6S.....	56
UTSX010D7P.....	70
UTSX010D7S.....	70
UTSX010D98P.....	61
UTSX010D98S.....	61
UTSX010E6P.....	56
UTSX010E6S.....	56
UTSX010E7P.....	70
UTSX010E7S.....	70
UTSX010E98P.....	61
UTSX010E98S.....	61
UTSX01210P.....	89
UTSX01210S.....	89
UTSX0128P.....	74
UTSX0128S.....	74
UTSX012D10P.....	89
UTSX012D10S.....	89
UTSX012D14P.....	108
UTSX012D14S.....	108
UTSX012D2P.....	14
UTSX012D2S.....	14
UTSX012D3P.....	27
UTSX012D3S.....	27
UTSX012D4P.....	31
UTSX012D4S.....	31
UTSX012D8P.....	79
UTSX012D8S.....	79
UTSX012E10P.....	89
UTSX012E10S.....	89
UTSX012E14P.....	108
UTSX012E14S.....	108
UTSX012E2P.....	14
UTSX012E2S.....	14
UTSX012E3P.....	27
UTSX012E3S.....	27
UTSX012E4P.....	31
UTSX012E4S.....	31
UTSX012E8P.....	79
UTSX012E8S.....	79

UTSX01412P.....	94
UTSX01412S.....	94
UTSX01419P.....	120
UTSX01419S.....	120
UTSX0142G1P.....	23
UTSX0142G1S.....	23
UTSX0147P.....	65
UTSX0147PSEK9.....	65
UTSX0147S.....	65
UTSX0148P.....	83
UTSX0148S.....	83
UTSX01492P.....	103
UTSX01492S.....	103
UTSX014D12P.....	99
UTSX014D12S.....	99
UTSX014D15P.....	112
UTSX014D15S.....	112
UTSX014D18P.....	116
UTSX014D18S.....	116
UTSX014D19P.....	120
UTSX014D19S.....	120
UTSX014D5P.....	46
UTSX014D5S.....	46
UTSX014D7P.....	65
UTSX014D7S.....	65
UTSX014E12P.....	99
UTSX014E12S.....	99
UTSX014E15P.....	112
UTSX014E15S.....	112
UTSX014E18P.....	116
UTSX014E18S.....	116
UTSX014E19P.....	120
UTSX014E19S.....	120
UTSX014E5P.....	46
UTSX014E5S.....	46
UTSX014E7P.....	65
UTSX014E7S.....	65

Square flange receptacle with cable gland

UTSX0JC102W2P.....	36
UTSX0JC102W2S.....	36
UTSX0JC103P.....	18
UTSX0JC103S.....	18
UTSX0JC104P.....	41
UTSX0JC104S.....	41
UTSX0JC106P.....	56
UTSX0JC106S.....	56
UTSX0JC1210P.....	89
UTSX0JC1210S.....	89
UTSX0JC124P.....	31
UTSX0JC124S.....	31
UTSX0JC128P.....	74
UTSX0JC128S.....	74
UTSX0JC1412P.....	94
UTSX0JC1412S.....	94
UTSX0JC1419P.....	120
UTSX0JC1419S.....	120
UTSX0JC142G1P.....	23
UTSX0JC142G1S.....	23
UTSX0JC147P.....	65
UTSX0JC147S.....	65
UTSX0JC148P.....	83
UTSX0JC148S.....	83
UTSX0JC1492P.....	103
UTSX0JC1492S.....	103

Accessories

Color coding rings

UTGX610CCRG	20
UTGX610CCRR	20
UTGX610CCRY	20
UTGX612CCRG	16
UTGX612CCRR	16
UTGX612CCRY	16
UTGX614CCRG	25
UTGX614CCRR	25
UTGX614CCRY	25
UTGX710CCRG	20
UTGX710CCRR	20
UTGX710CCRY	20
UTGX712CCRG	16
UTGX712CCRR	16
UTGX712CCRY	16
UTGX714CCRG	25
UTGX714CCRR	25
UTGX714CCRY	25

Discrimination pin

SMSPE0	150
--------------	-----

Gasket

UTFD12B	38
UTFD13B	16
UTFD14B	25

Plastic protective cap

85005586A	20
85005587A	16
85005588A	25
85005595	20
85005596	16
85005597	25

Sealing caps

UTGX10DCG	20
UTGX10DCGR	20
UTGX12DCG	16
UTGX12DCGE	16
UTGX12DCGR	16
UTGX14DCG	25
UTGX14DCGE	49
UTGX14DCGR	25
UTGX610DCG	20
UTGX612DCG	16
UTGX614DCG	25
UTS614DCG133	49

Contacts

Crimp contacts

82911456A	128
82911456K	128
82911457NA	128
82911457NK	128
82911458A	128
82911458K	128
82911459NA	128
82911459NK	128
82911460A	128
82911460K	128
82911461NA	128
82911461NK	128
82911462A	128

82911462K	128
82911463NA	128
82911463NK	128
82911464A	128
82911464K	128
82911465NA	128
82911465NK	128
82911466A	128
82911466K	128
82911467NA	128
82911467NK	128
82913600A	128
82913601A	128
82913602A	128
82913603A	128
82913604A	128
82913605A	128
82913606A	128
82913607A	128
82913608A	128
82913609A	128
RC14M30GE1K	128
RC14M30J	128
RC14M30K	128
RC16M23GE1K	128
RC16M23J	128
RC16M23K	128
RC18W3K	128
RC20M12GE7K	128
RC20M12J	128
RC20M12K	128
RC20M13GE7K	128
RC20M13J	128
RC20M13K	128
RC20W3K	128
RC24M9GE7K	128
RC24M9J	128
RC24M9K	128
RC24W3K	128
RC28M1GE7K	128
RC28M1J	128
RC28M1K	128
RM14M30GE1K	128
RM14M30J	128
RM14M30K	128
RM16M23GE1K	128
RM16M23J	128
RM16M23K	128
RM18W3K	128
RM20M12GE1K	128
RM20M12J	128
RM20M12K	128
RM20M13J	128
RM20M13K	128
RM20W3K	128
RM24M9GE1K	128
RM24M9J	128
RM24M9K	128
RM24W3K	128
RM28M1GE1K	128
RM28M1J	128
RM28M1K	128
SC14M1S18	128
SC14M1S31	128
SC14M1TK6	128
SC14ML1S18	128
SC14ML1S31	128
SC14ML1TK6	128
SC16M11S18	128
SC16M11S31	128

SC16M11TK6.....	128	SM24W3TK6.....	128
SC16M1S18.....	128	SM24WL3TK6.....	128
SC16M1S31.....	128	SM24WL3TKS26.....	128
SC16M1TK6.....	128		
SC16ML11S18.....	128	Coaxial contacts	
SC16ML11S31.....	128	RCDX6016D28.....	131
SC16ML11TK6.....	128	RCDX6018D28.....	131
SC16ML1S18.....	128	RCDX6024D28.....	131
SC16ML1S31.....	128	RCDX6026D28.....	131
SC16ML1TK6.....	128	RCDX6032D28.....	131
SC20M1S18.....	128	RCDX6034D28.....	131
SC20M1S31.....	128	RCDX6036D28.....	131
SC20M1TK6.....	128	RCDX6052D28.....	131
SC20ML1S18.....	128	RCDX60xxD28.....	131
SC20ML1S31.....	128	RCDXK1D28.....	131
SC20ML1TK6.....	128	RMDX6018D28.....	131
SC20W3S26.....	128	RMDX6024D28.....	131
SC20W3TK6.....	128	RMDX6026D28.....	131
SC20WL3S25.....	128	RMDX6032D28.....	131
SC20WL3TK6.....	128	RMDX6034D28.....	131
SC24M1S18.....	128	RMDX6036D28.....	131
SC24M1S31.....	128	RMDX6046D28.....	131
SC24M1TK6.....	128	RMDX6050D28.....	131
SC24ML1S18.....	128	RMDX6052D28.....	131
SC24ML1S31.....	128	RMDX60xxD28.....	131
SC24ML1TK6.....	128	RMDXK10D28.....	131
SC24W3S25.....	128		
SC24W3S26.....	128	Fiber optic contacts	
SC24W3TK6.....	128	RCPOF1000B.....	136
SC24WL3TK6.....	128	RMPOF1000.....	136
SC24WL3TKS25.....	128		
SM14M1S18.....	128	PCB contacts	
SM14M1S31.....	128	82911684NAPC.....	133
SM14M1TK6.....	128	82911684NPC.....	133
SM14ML1S18.....	128	82911685NAPC.....	133
SM14ML1S31.....	128	82911685NPC.....	133
SM14ML1TK6.....	128	RC20M12E83K.....	133
SM16M11S18.....	128	RC20M12E84K.....	133
SM16M11S31.....	128	RC20M12E8K.....	133
SM16M11TK6.....	128	RCW5016K.....	133
SM16M1S18.....	128	RCW50A7K.....	133
SM16M1S31.....	128	RM20M12E83K.....	133
SM16M1TK6.....	128	RM20M12E8K.....	133
SM16ML11S18.....	128	RMW5016K.....	133
SM16ML11S31.....	128	RMW50A7K.....	133
SM16ML11TK6.....	128		
SM16ML1S18.....	128	Tooling	
SM16ML1S31.....	128	51060210924.....	137
SM16ML1TK6.....	128	51060210936.....	137
SM20M1S18.....	128	M317.....	137
SM20M1S31.....	128	MH860.....	137
SM20M1TK6.....	128	RX2025GE1.....	138
SM20ML1S18.....	128	RX2031J.....	138
SM20ML1S31.....	128	RX20D44.....	138
SM20ML1TK6.....	128	S16RCM14.....	137
SM20W3S26.....	128	S16RCM16.....	137
SM20W3TK6.....	128	S16SCM20.....	137
SM20WL3S26.....	128	S16SCML1.....	137
SM20WL3TK6.....	128	S16SCML11.....	137
SM24M1S18.....	128	S20RCM.....	137
SM24M1S31.....	128	S20SCM20.....	137
SM24M1TK6.....	128	SHANDLES.....	137
SM24ML1S18.....	128	VGE10077A.....	137
SM24ML1S31.....	128	VGE10078A.....	137
SM24ML1TK6.....	128		
SM24W3S26.....	128		
SM24W3S26.....	128		

