

PB SERIES

FEATURES

- Design meet IEC 60601-1 & IEC 62368-1
- Meet intel x86 platform requirement
- Meet 80PLUS GOLD efficiency
- Meet EN 55011 class B emission
- BF class isolation

SAFETY STANDARD APPROVAL



DESCRIPTION

This series of AC/DC switching power supplies in a standard ATX form factor 165 x 150 x 86 mm is capable of delivering 600 or 700 watts of continuous power. PSU build-in DC/DC converter at +3.3V and +5V output rails to enhance load regulation. High-efficiency design complies with 80PLUS GOLD efficiency.

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	
FSP600M-70PB	7 A (rms) @115Vac, 60Hz 3.5 A (rms) @ 230Vac, 50Hz
FSP700M-70PB	8A (rms) @115Vac, 60Hz 4 A (rms) @ 230Vac, 50Hz
Earth leakage current:	300 μ Amax. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maxi. output power:	See rating chart.
Ripple and noise:	See rating chart.
Protection	
Overvoltage	+3.3V, +5V & +12V, Latch off
Overcurrent	+3.3V, +5V & +12V, Latch off
Overtemperature	+3.3V, +5V & +12V, Latch off +5Vsb, -12V, -5V, Auto-recovery

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +50°C
Storage temperature:	-20°C to +80°C
Relative humidity:	10% to 95% non-condensing
Derating:	Derate from 100% at +50°C linearly to 50% at +70°C

GENERAL SPECIFICATIONS

Turn-on delay time	2 Sec maxi.
Power factor:	0.9 mini. @ 20% load mini.
Efficiency:	80PLUS GOLD (87%, 90%, 87%)
Hold-up time:	17 mS minimum at 115VAC & 230VAC
Line regulation:	±1% maximum at full load
Inrush current:	50 A @ 115 VAC at 25°C cold start 100 A @ 230 VAC at 25°C cold start
Withstand voltage:	4000 VAC from input to output (2 MOPP) 1500 VAC from input to ground (1 MOPP) 1500 VAC from output to ground
MTBF:	150,000 hours at full load & 25°C ambient, calculated per MIL-HDBK- 217
EMC Performance (IEC60601-1-2)	
EN55011:/ EN55032	Class B conducted, Class B radiated
FCC / VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ±15 KV air and ±8 KV contact
EN61000-4-3:	Radiated immunity, 9-28 V/m
EN61000-4-4:	Fast transient/burst, ±2 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com.
EN61000-4-6:	Conducted immunity, 3-6 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 60% reduction for 100 ms >95% reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Rating Outputs	FSP700M-70PB		Load Regulation	Ripple & Noise ²
	Mini. Load	Maxi. Load		
+3.3 V	0 A	24 A	±5%	50 mV P-P
+ 5 V	0 A	30 A	±5%	50 mV P-P
+12 V1	0.1 A	30 A peak 35 A	±5%	120 mV P-P
+12 V2	0.2 A	30 A peak 35 A	±5%	120 mV P-P
- 5 V	0 A	0.2 A	±10%	100 mV P-P
-12 V	0 A	0.5 A	±10%	120 mV P-P
+5 Vsb	0.05 A	3.0 A	±5%	50 mV P-P
+3.3 V & +5 V Combine Output Power	150W Maxi.			
+12V Total Output Power Maxi. / Peak ³	58A Maxi. / 780W peak			
Total Output Power	700W			

NOTES:



1. Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.
2. The duration of peak power is less than 10 mS.

INTERFACE SIGNALS

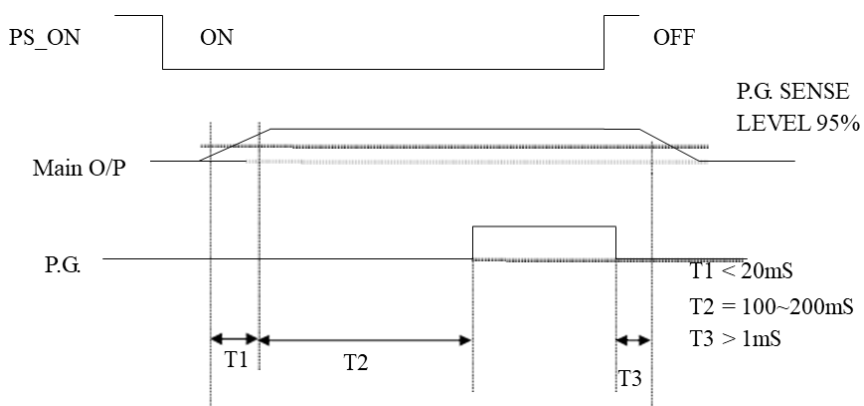

1. T1 : RISE TIME < 20 mS
2. T2 : POWER GOOD DELAY TIME 100 ~ 500 mS
3. T3 : POWER FAIL DELAY TIME > 1 mS

MECHANICAL SPECIFICATIONS

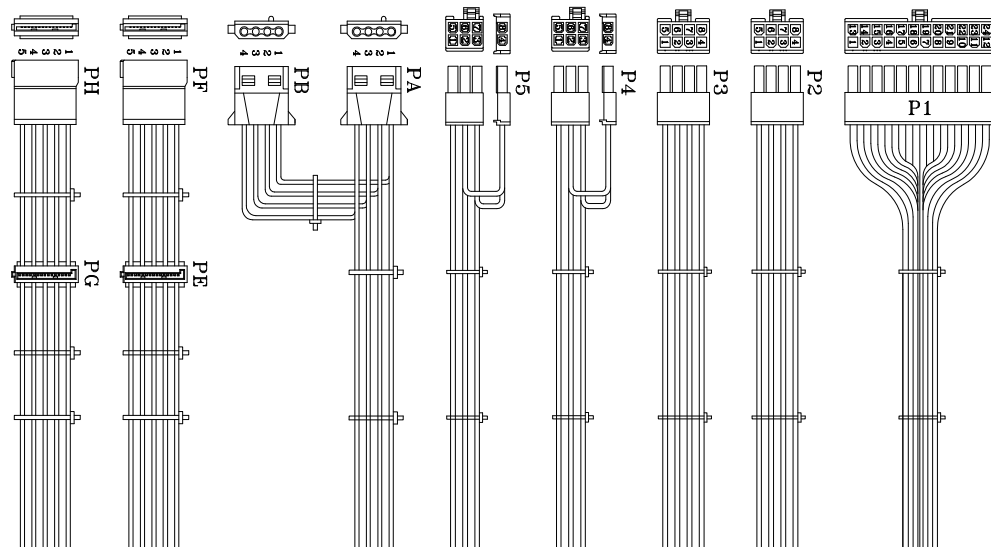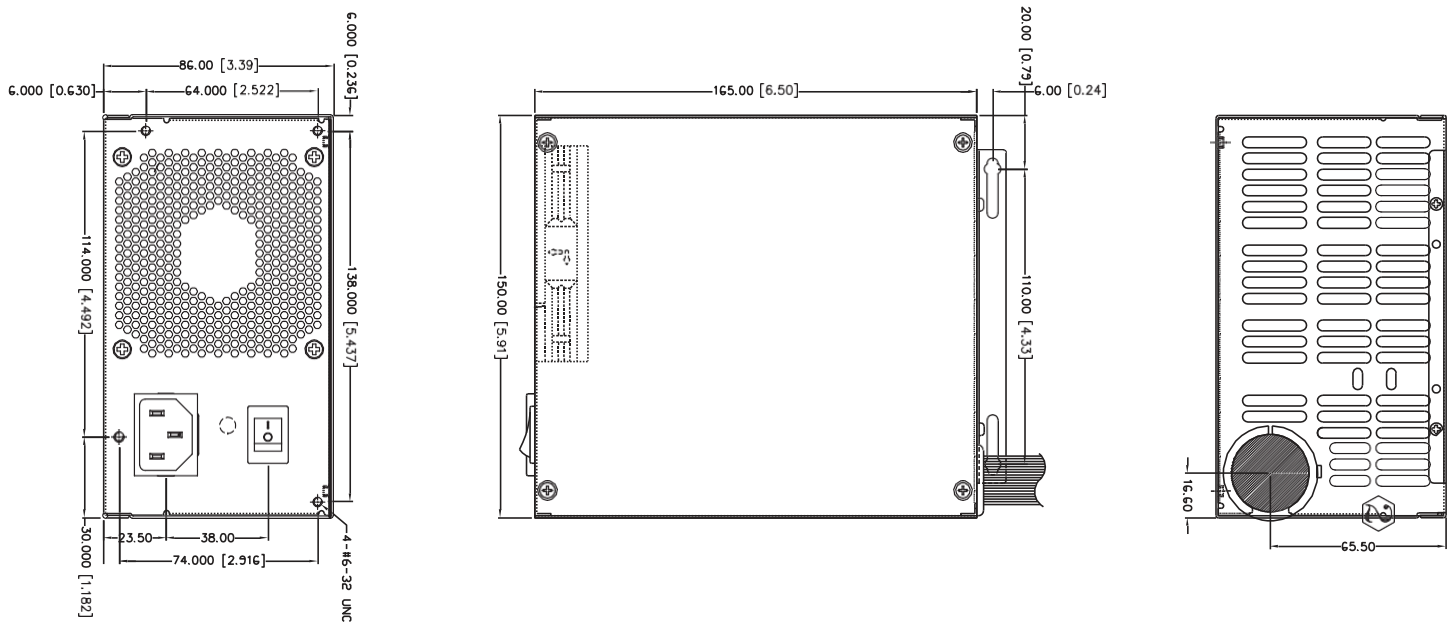

Output connectors	Cable Length	Connector No.	Output connectors (equivalent)
Mother board 24 pin	500 mm	P1	MOLEX 39-01-2240
CPU 8 pin	500 mm * 2	P2, P3	MOLEX 39-01-2080
PCI-e 6+2 pin	350 mm * 2	P4, P5	WST P8-I42002, K21B-B
SATA	(500+155 mm) * 2	PE+PF, PG+PH	MOLEX SD-67926-0011, MOLEX SD-67582-0011
PATA	500+155 mm	PA+PB	WST P4-A10202

Weight: 2.32 Kg