


Accurate and Repeatable High-Resolution EMC and EMI diagnostic with a single probe, Robotic Arm on your lab-bench

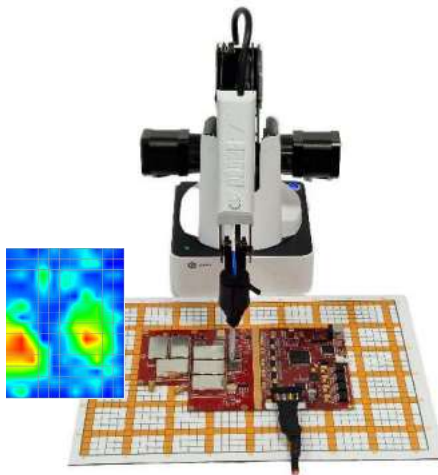

Using Handheld probes to identify and resolve EMC/EMI issue testing has never been this accurate. 3D Precision Technology used to assist high density board designers to use off the shelf hand-held probes and/or Y.I.C. Technologies probes and visualise the root causes of potential EMC and EMI problems during pre and post EMC compliance testing.

EMC and signal integrity are major concerns in the design of high-speed PCBs. While **EMScanner** allows designers to easily locate emission by placing the PCB on its flat surface, the **EMProbe** allows users to test the component side of the PCB and adjust the height of the scan.

This enables the design engineers to diagnose EMC/EMI problems limited only by the choice of the Spectrum Analyser and the Near Field Probe and allows them to visualize the root causes of potential EMC and EMI problems of a non-flat surface or of a complete product.




ADDITION: *EMProbe Extension – X Axis increase reach to 900mm.*

During any new product development process, design engineers must find, characterize, and address unintended radiators or RF leakage to pass compliance testing. **EMProbe** allows board designers to pre-test and resolve EMC and EMI problems early on, thus avoiding unexpected EMC compliance test results.



NFPKit

A Rapid Handheld Live Tracking Probe Scanning Solution

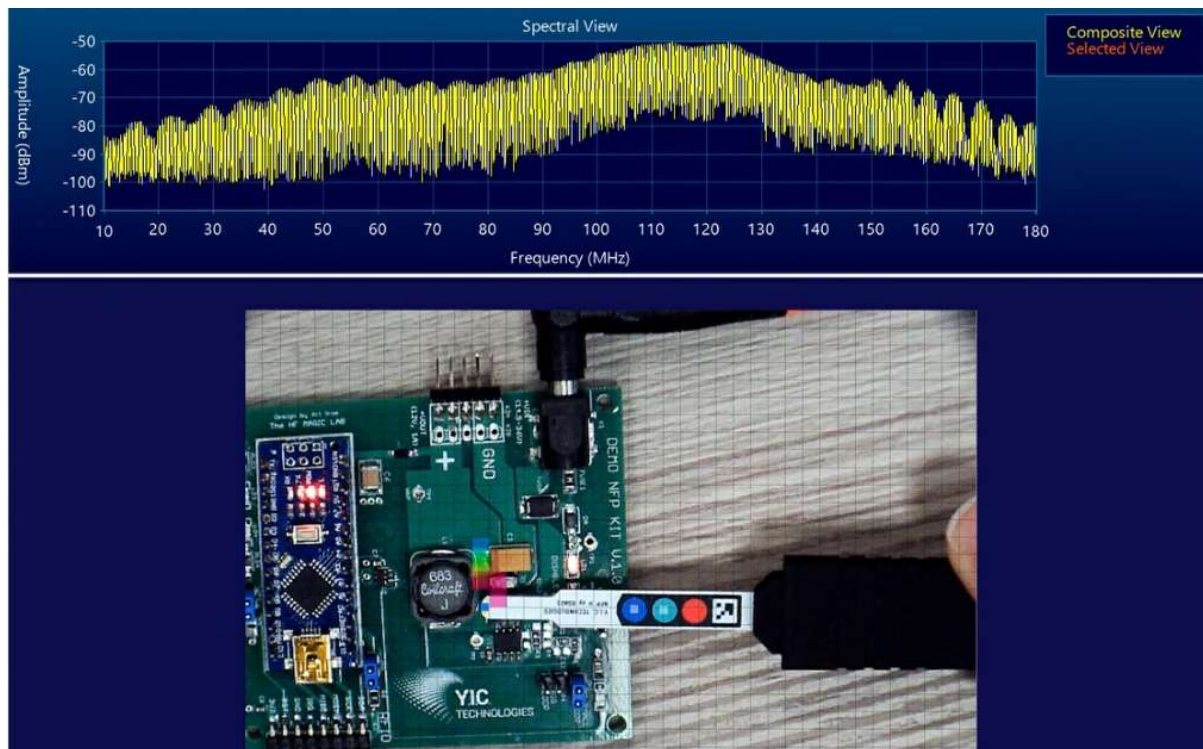

Live tracking provides a faster, easier, and more reliable method to get these results. Using an overhead webcam and probe markers, the EMViewer software will detect the type of probe and point of measurement automatically, allowing design engineers to see results quickly with minimal setup time.

Y.I.C. Technologies NFPKit is designed for measuring near field radiated emissions for EMC/EMI pre-compliance testing. The probes can be used to locate, identify, measure, and characterize potential sources of electromagnetic radiation and interference radiated from traces or components of electronic PCBs, assemblies, or products. The probe output is proportional to the magnetic field (H) strength present at the probe location.




A compatible Spectrum Analyzer with 50 Ω input is required and the probes can also be used as handheld standalone probes or mounted on Y.I.C. Technologies EMProbe robotic arm for high resolution scans.



Key Features

- Fully integrated with Y.I.C. Technologies EMViewer Software
- Live real-time probe position tracking
- Normalization and correction when using the EMViewer Software
- Flat response within the range of operation
- Slim Design and Protective Coating

Content

Handheld Probe Set	Set of 5 Probes Electric and Magnetic Probes HXY 10A02: 10 MHz – 300 MHz HXY 20A02: 100 MHz – 1.4 GHz HZ 40A02: 1 GHz – 14 GHz HXY 60A01: 1 GHz – 13 GHz E 00A02: Full Range	
Camera	USB Mini Camera, 5MP, 5-50mm Varifocal Lens, 10X Optical Zoom	
Support Arm	11 Inch Adjustable Support Arm with Clamp	





Applications

EMC/EMI Pre-Compliance Magnetic Near-Field Measurements


- Magnetic Near Field mapping
- Magnetic Immunity Testing



Probe Response Curves

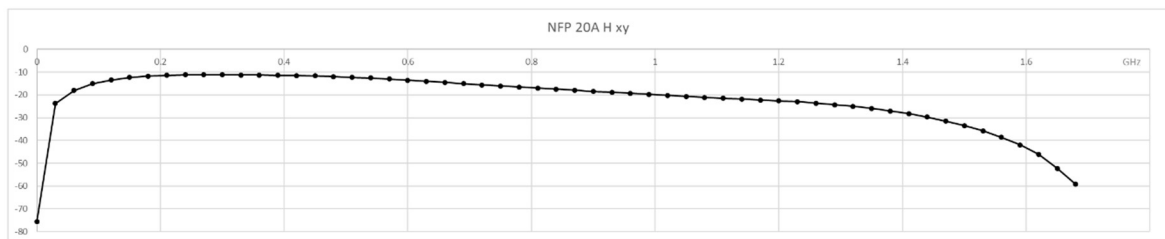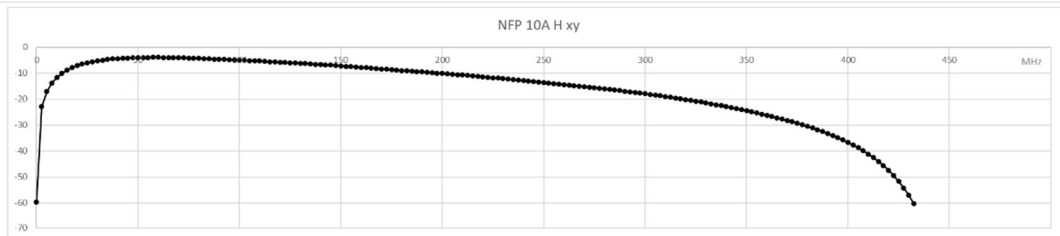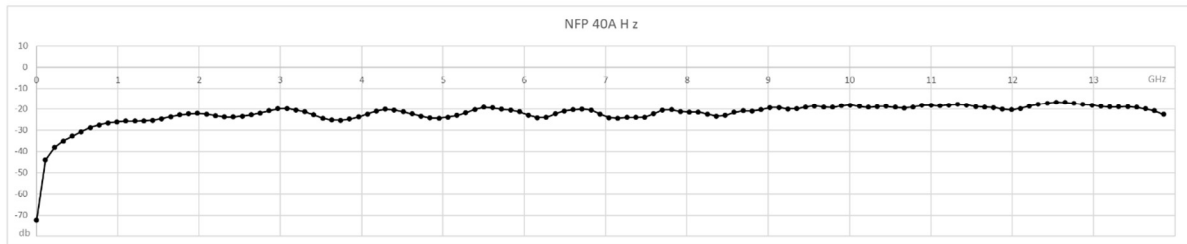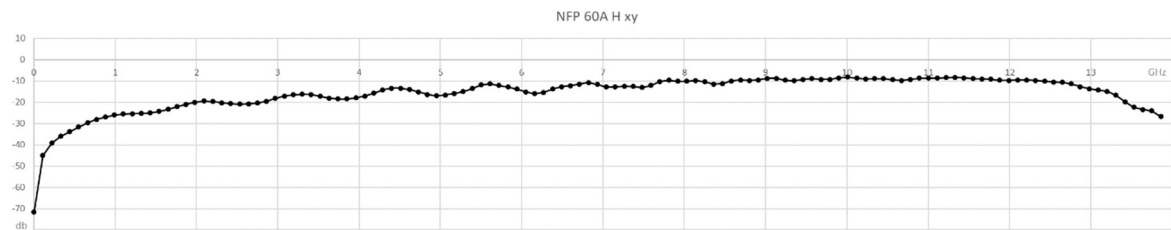

www.yictechnologies.com

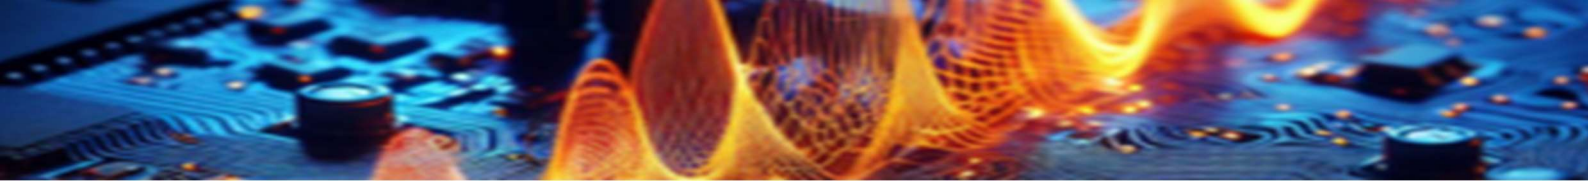

EMProbe delivers **repeatable** and **reliable** results that pinpoint the cause of a design failure. As a result, the user can personally test the design without having to rely on another department, test engineer, or time-consuming off-site testing. After diagnosing even an intermittent problem, the engineer can implement a design change and retest. The results provide concrete verification of the effectiveness (or not) of the design change.

The **EMProbe** solution consists of a computer controlled Robotic Arm, Near Field probe and a customer-supplied spectrum analyser, all controlled by the **EMViewer** Software.

Even though **EMViewer** software is recommended the user can also control the **EMProbe** through the robotic arm manufacturers API.

The **EMProbe** diagnostic capabilities allow design teams to **reduce testing time** by more than two orders of magnitude. Users have also documented 50% reductions in design cycle times. This allows the design team to immediately analyse and compare design iterations.


Ideal projects for the **EMProbe** are components side testing of boards designed for high speed, high power, and/or high density/complexity. Any PCB that places a premium on board real-estate also qualifies as an excellent candidate.

The **EMProbe** provides an **easy-to-use, cost-effective, and scalable solution** for design teams. Emission, immunity, filtering, EMI shielding, broadband noise and Common Mode testing are some of the applications that the **EMProbe** system addresses in mere seconds.

Features & Specifications

Capability	Spectral scan, spatial scan, peak-hold, continuous scanning, spectral and spatial comparison, scripting, limit lines and report generation.
Supported Spectrum Analysers	Wide range of Keysight and Rohde & Schwarz Spectrum Analysers are supported. Check www.yictechnologies.com for details.
Supported operating systems	Windows 10/11®
Supported CAD overlays	Standard Gerber® RS274x format, HPGL format and JPEG
Max Frequency coverage	Up to 13GHz with the supplied Y.I.C. Technologies Probes
Spatial resolution	High Resolution: 7.5mm to 0.2mm
Scan area	300 mm Radius
Scan Height (Max)	150 mm Radius
Frequency accuracy of peaks	Peak marking accuracy of spectrum analyser
Probe to probe uniformity	Dependent on the selected probe
Maximum radiated power load	Dependent on spectrum analyser and the probe performance
Operating temperature	From 15° C to 40° C (continuous spectral and spatial scans at 50 MHz)
NET Weight	3.40Kg (Excluding cables and the adaptor)

Workspace

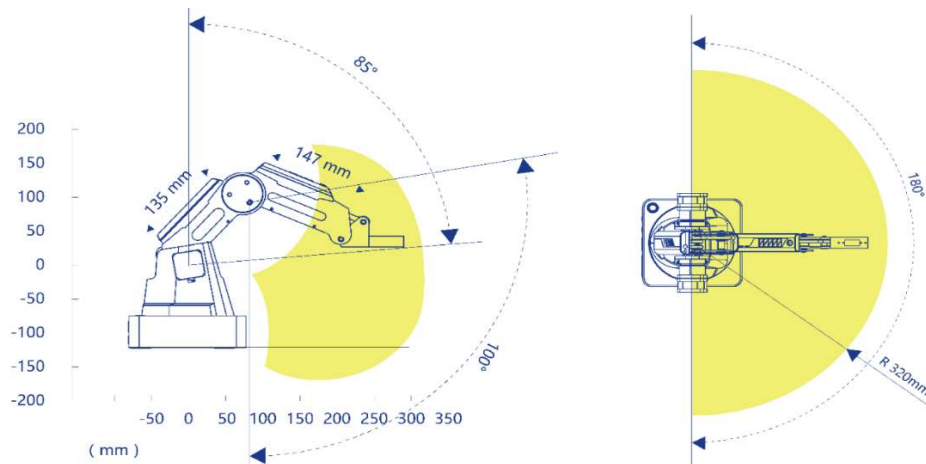

Probes

Y.I.C. Technologies NFP Set

Set of 5 Probes

Electric and Magnetic Probes


HXY 10A02: 10 MHz – 300 MHz

HXY 20A02: 100 MHz – 1.4 GHz

HZ 40A02: 1 GHz – 14 GHz

HXY 60A01: 1 GHz – 13 GHz

E 00A02: 1.6 GHz – 18 GHz

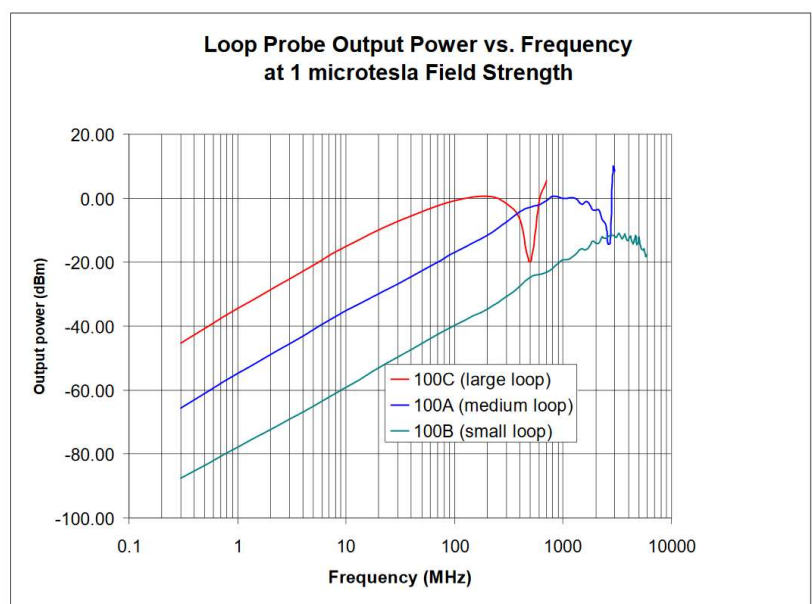

www.yictechnologies.com

If you can **see** it, you can **fix** it!