

SENSOR & SURVEILLANCE SYSTEMS : **TRIPODS**

QTT TACTICAL TRIPOD



Quickset incorporates over 75 years of experience in the design and manufacture of tripod support and positioning systems with unsurpassed reliability and performance.



This tactical tripod uses strong alloys and a sturdy component design to guard against damage from drops and impacts that are frequently seen in field use. Oversized legs and strut lock levers are to facilitate operation in reduced dexterity

environments (gloved hands, cold hands, etc.) Because of its built-in balancing and variable drag, the head requires little operator input to position the payload and locks it in place when the hands are removed. Multiple payload configurations can be used with consistent operator input thanks to adjustable drag on each axis. One hand operation is convenient with the counterbalance design, freeing up the other hand for radio operation or range chart creation.



QTT TACTICAL TRIPOD 4-44001 : SPECIFICATIONS


TACTICAL TRIPOD WITH PAN & TILT HEAD

PERFORMANCE		PHYSICAL PROPERTIES	
Payload Capacity	30 lbs	Weight	2.63 lbs
Pan Range of Motion	360° Continuous Rotation	Materials	Aluminum Alloy, Carbon Fiber
Tilt Holding Torque	50 in-lbs	Exterior Finish	Matte Black Finish (Std.) Customer Specified Color
Tilt Range of Motion	+/- 30°	ENVIRONMENTAL	
Tilt Torque Compensation	1.25 In-Lb/Deg		
Adjustable Drag and Axis Locks	Single Knob Per Axis for Adjustable Drag and Axis Lock		
Hard Limits	+/- 31°, Tilt Axis Only		
Height Range	9.4"- 24.9" With Head 5.6" - 21.2" Tripod Only		
Leg Sections	1 Telescoping Leg Section and 1 Fixed Section	Operational Temperature	-32°C to +55°C (100% Rh)
Stow Size	17.33" to 17.8" 14.1" X 4.0" (diameter) Tripod Only	Storage Temperature	-40°C to +70°C
Payload Attachment	Multiple Threaded and Thru Holes on Tripod and Head for Mounting	Humidity	0 - 100% RH Condensing
Backlash	Zero Backlash Design Both Axis	Maintenance	None Required, Sealed Mechanisms

Specification is subject to change without notification

QTT TACTICAL TRIPOD 4-44001 DIMENSIONS

All Dimensions are for Reference Only

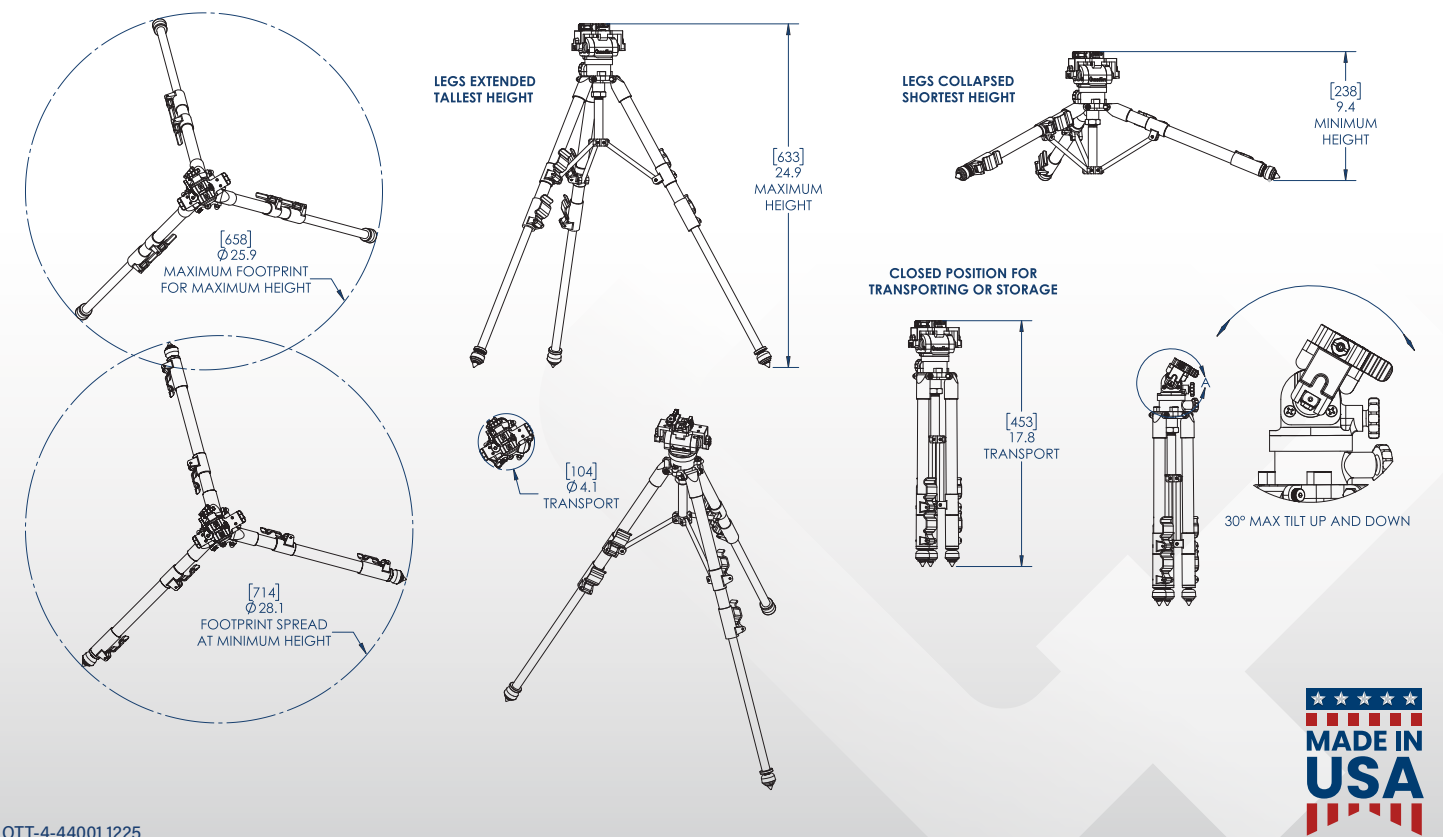

QTT-4-44001 1225